


NOTES:
SPECIFICATION:

1. CURRENT RATING: 5.0A MAX
2. VOLTAGE: 100 VAC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. INSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY: 10,000 CYCLES





G-Switch Electronic (HongKong) CO.,Ltd

Unless otherwise specified, Tolerance: X. ±0.30 X.x ±0.20 X.xx ±0.15 X.xxx ±0.10 Angles ±3°	DESIGN 陈锋枫	DATE 2016.05.29	TITLE:	
	CHECKED	DATE	GT-USB-7031	
	APPROVED	DATE		
http://www.dg-switch.com			REV.: X1	SCALE: 4:1
TEL:0769-82388879			UNIT: mm	
			SIZE: A4	SHEET: 1/1

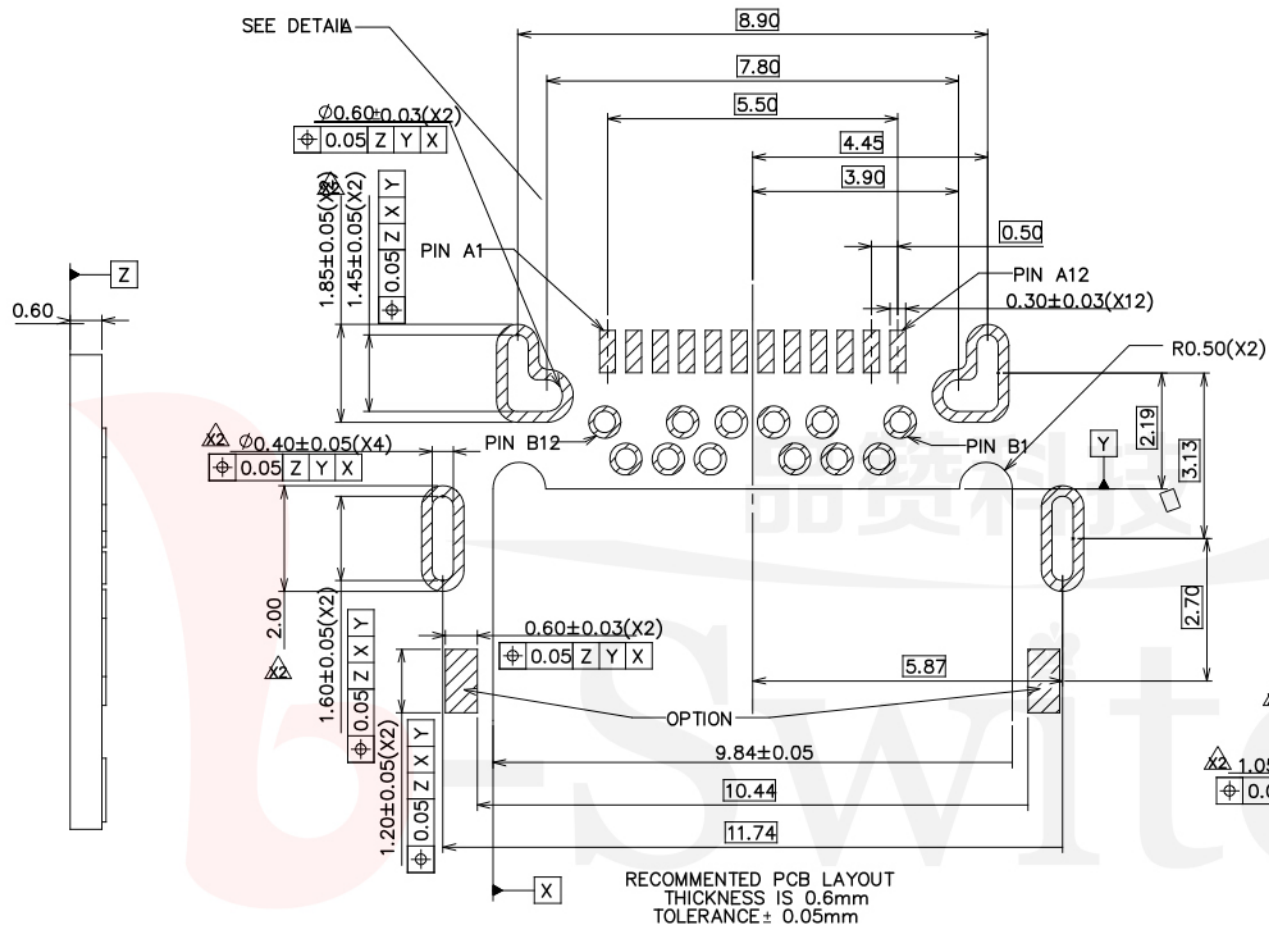

RECOMMENDED PCB LAYOUT
THICKNESS IS 0.6mm
TOLERANCE ± 0.05mm

TABLE C-PIN NO. (TOP VIEW)

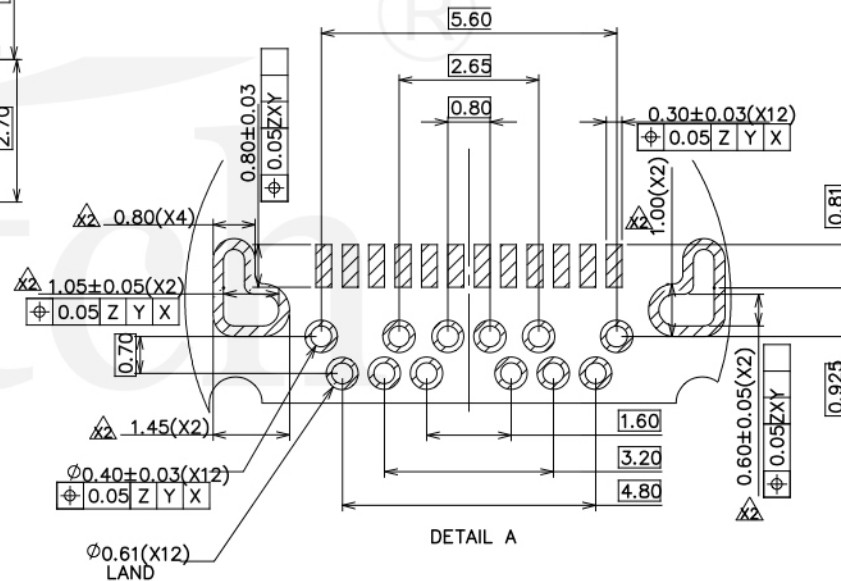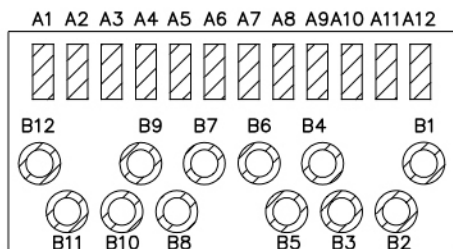

	G-Switch Electronic (HongKong) CO.,Ltd		
	DESIGN 陈锋枫 CHECKED APPROVED http://www.dg-switch.com TEL:0769-82388879	DATE 2016.05.29 DATE DATE	TITLE: GT-USB-7031 REV.: X1 SCALE: 4:1 SHEET: 1/1
Unless otherwise specified, Tolerance: X. ±0.30 X.x ±0.20 X.xx ±0.15 X.xxx ±0.10 Angles ±3°	UNIT: mm		