




GT-LS606XXX-LX

- Product Type**
6x6
- G-SWITCH Operating Force**
A=160gf
B=250gf
C=100gf
- LED Color**
N=无
R=红色
Y=黄色
G=绿色
U=蓝色
W=白色
O=橙色
R/U=红发蓝
X/O=客制化
- Switch lifetime (Force)**
L05=50,000 Cycles
L1=100,000 Cycles
- 键帽颜色**
A=透明(PC)
B=黑色(PA66)
C=白色(POM)
D=米黄色 (PA66)

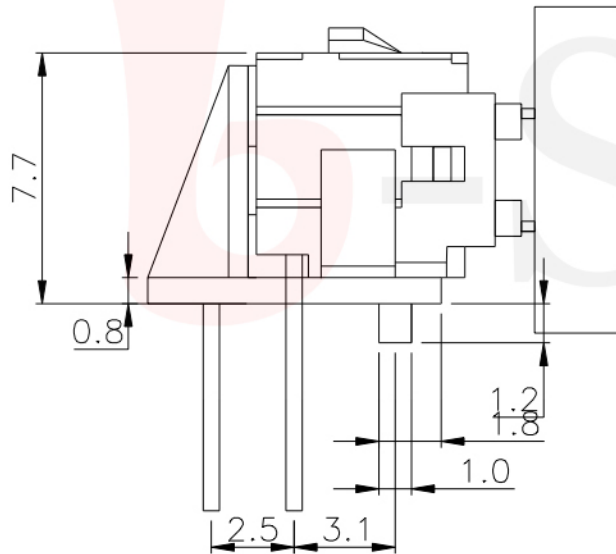

P.C.B LAYOUT

CIRCUIT

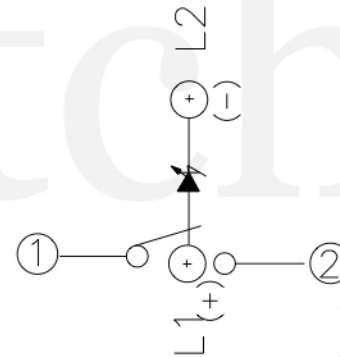

G-Switch Specification:

Operating temperature range : -30°Cto+85°C
 Rating : 50mA.12V DC
 Insulation resistance: : 100MΩ min.100V DC
 Dielectric strength : 250V AC for 1 min
 Contact resistance: : 100m Ω max.
 Travel:0.25±0.1mm



	G-Switch Electronic (HongKong) CO.,Ltd.		
	DESIGN FengFengChen	DATE 2019.05.29	Molde code:
Unless otherwise specified, Tolerance:	CHECKED	DATE	GT-LS606XXX-LX
X. ±0.30	APPROVED	DATE	
X.x ±0.20	http://www.dg-switch.com		REV.: X1
X.xx ±0.15	TEL:0769-82388879		SCALE: 4:1
X.xxx ±0.10			UNIT: mm
Angles ±3°			SIZE: A4
			SHEET: 1/1