


- G-Switch USB-C Specification:**
- 1.Current rated: 5A on vbus/1.25A on vconn/0.25A on other
 - 2.Withstanding voltage: 24V AC
 - 3.Contact resistance: 40mΩ Max
 - 4.Insulation resistance: 100MΩ Min
 - 5.Operating temperature: -40°C ~ +85°C
 - 6.Mating force : 5N~20N
 - 7.Unmating force: 8N~20N
 - 8.Durability cycle:10,000 cycles
 - 9.Data transmission rate up to 10Gbp/s

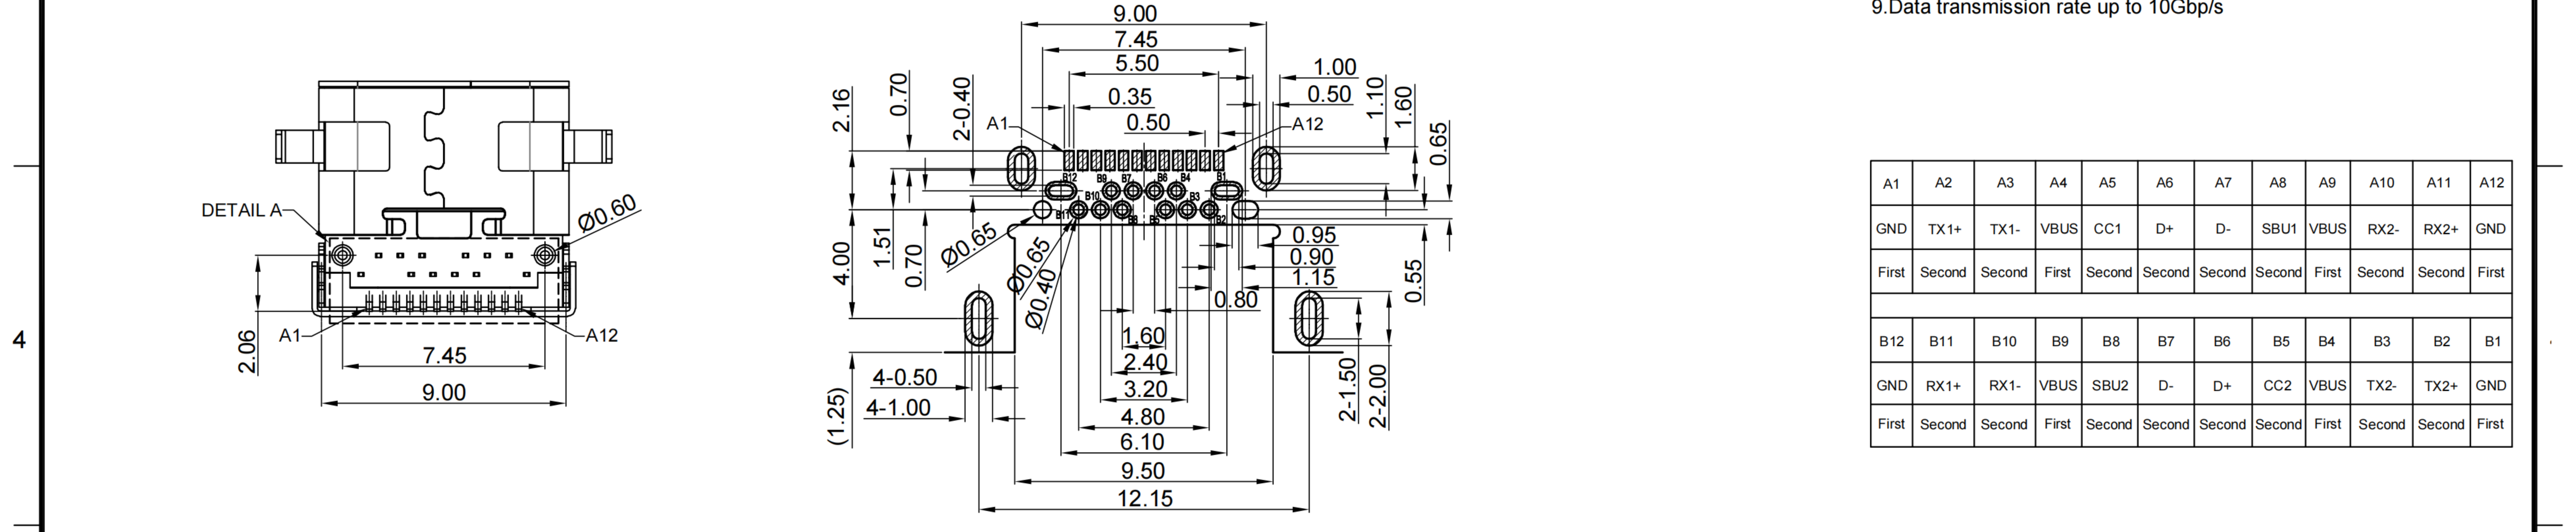

A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12
GND	TX+	TX-	VBUS	CC1	D+	D-	SBU1	VBUS	RX2-	RX2+	GND
First	Second	Second	First	Second	Second	Second	Second	First	Second	Second	First

B12	B11	B10	B9	B8	B7	B6	B5	B4	B3	B2	B1
GND	RX1+	RX1-	VBUS	SBU2	D-	D+	CC2	VBUS	TX2-	TX2+	GND
First	Second	Second	First	Second	Second	Second	Second	First	Second	Second	First

1	COVER SHELL	STAINLESS STEEL	NI PLATED
2	SHELL	STAINLESS STEEL	NI PLATED
3	GND PLATE	STAINLESS STEEL	---
4	MID PLATE	STAINLESS STEEL	NI PLATED
5	HOUSING	HIGH TEMPERATURE PLASTIC	Black UL 94 V-0
6	TERMINALS	COPPER ALLOY	Au PLATING ON CONTACT AREA
NO.	PARTS	MATERIAL	REMARKS

RECOMMENDED PCB LAYOUT
TOLERANCE:±0.05

Pb Process Capable

RoHS Compliant
EU RoHS Standards

HALOGEN COMPLIANT
Halogen Free

SCALE: 1:1	UNIT: mm	Title: Horizontal Type-c 24P Female Sink1.4 SMT CH=0.28 L=8.65mm	
SIZE: A4		Molde Code: GT-USB-7009B	
Unless otherwise General Tolerance:		DRAWN	CHECKED
X.	±0.25	Xia	Chen
X.x	±0.20		
X.xx	±0.15		
X.xxx	±0.10		
X°	±5°		
		APPROVED	DATE
		Chen	2023.02.01

品赞科技®

b-Switch

REV: A0 SHEET: 1/1