

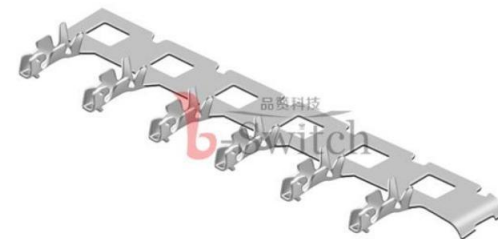
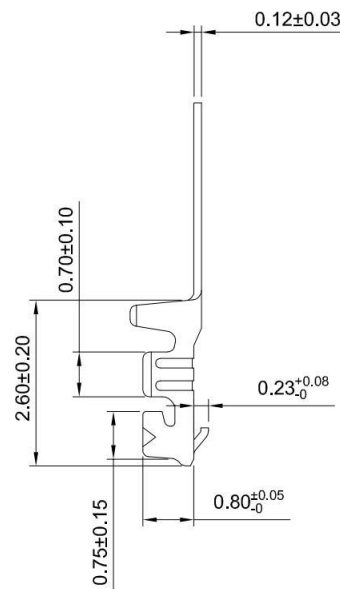


A B C D E

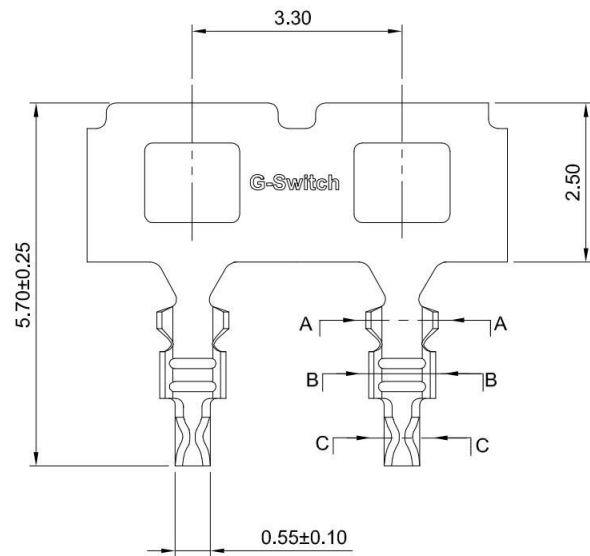


GT-D0801 T F -X XX 1


G-Switch
Series No
Connector
Terminal Plating
 BT-Bright Tin
 11-All G/F
Metal
 P-Phosphor Bronze
F-Female
 T-Terminal



SECTION:A-A



SECTION:B-B



SECTION:C-C

G-Switch Specification:

- 1.Current rated: 0.5A AC/DC
- 2.Voltage rating: 30V AC/DC
- 3.Withstanding voltage: 200V AC
- 4.Contact resistance: 30mΩ max.
- 5.Insulation resistance: 100MΩ min
- 6.Durability cycle: 30Cycles
- 7.Removal force: 0.50kgf/Pin min
- 8.Operating temperature range: -40°C ~ +105°C

GT-D0801TF-P111	Phosphor bronze	All G/F	AWG#28~#32	0.60mm(Max)	30000
GT-D0801TF-PBT1	Phosphor bronze	Bright Tin	AWG#28~#32	0.60mm(Max)	30000
Part NO	Material	Plating	Wire Size	Insulation O.D	Reel/PCS



SCALE: 1:1 UNIT: mm
 SIZE: A4

Unless otherwise
 General Tolerance:
 X ±0.40
 X.x ±0.30
 X.xx ±0.20
 X° ±5°
 X.x° ±3°

Title: Terminal 1.00mm Pitch SUH Crimp Style

Molde Code: GT-D0801TF-XXX1

DRAWN	CHECKED	APPROVED	DATE
Hu	Chen	Chen	2021.10.20



REV: A0 SHEET: 1/1

A B C D E