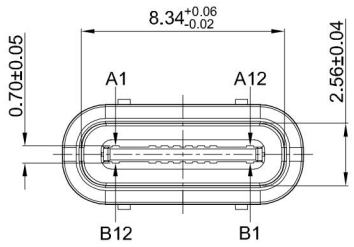

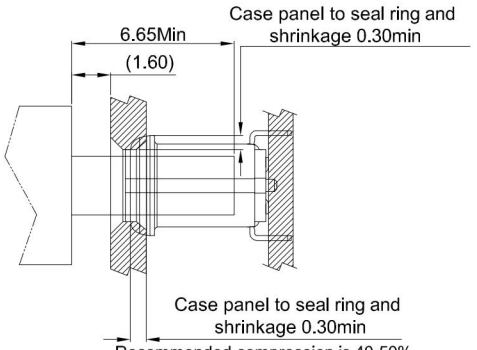

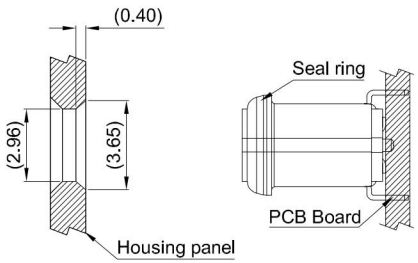

RECOMMENDED SEALING METHOD

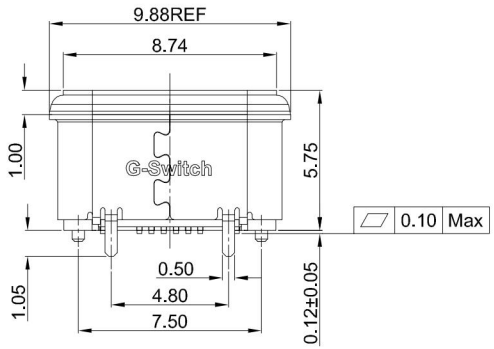





G-Switch USB-C Specification:

1.Current rated: 5A on vbus/1.25A
on vconn/0.25A on other
Voltage rating: 24V AC
2.Withstanding voltage: 100V AC/minute
3.Contact resistance: 50mΩ Max
4.Insulation resistance: 100MΩ Min
5.Operating temperature: -30°C ~ +85°C
6.Mating force: 5N~20N
7.Unmating force: 8N~20N
8.Durability cycle:10,000 cycles
9.Waterproof grade: IP-X6.



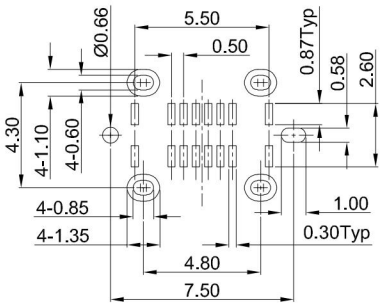

RECOMMENDED PCB LAYOUT
TOLERANCE:±0.05



A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12
GND			VBUS	CC1	D+	D-	SBU1	VBUS			GND
First			First	Second	Second	Second	Second	First			First

B12	B11	B10	B9	B8	B7	B6	B5	B4	B3	B2	B1
GND			VBUS	SBU2	D-	D+	CC2	VBUS			GND
First			First	Second	Second	Second	Second	First			First

NO.	PARTS	MATERIAL	REMARKS
1	SHEATH	HIGH TEMPERATURE PLASTIC	BLACK UL 94 V-0
2	SHELL	STAINLESS STEEL	NI PLATED
3	MID PLATE	STAINLESS STEEL	CLEAR ONLY
4	HOUSING	HIGH TEMPERATURE PLASTIC	BLACK UL 94 V-0
5	TERMINALS	COPPER ALLOY	Au PLATING ON CONTACT AREA
6	O-RING	SILICA GEL	RED

Pb Process Capable
RoHS Compliant EU RoHS Standards
HALOGEN Compliant Halogen Free

SCALE:	1:1
UNIT:	mm
SIZE:	A4

Unless otherwise General Tolerance:

X.x	±0.25
X.xx	±0.15
X.xxx	±0.10
X°	±3°
X.x°	±2°
X.xx°	±1°

Title: Vertical Type-c 16P Female SMT H=5.75mm

Molde Code: GT-USB-7074A01

DRAWN	CHECKED	APPROVED	DATE
Jiang	Xia	Chen	2023.02.01

品赞科技 G-Switch www.dg-switch.com

REV: A0

SHEET: 1/1