


GT-A2508 T M -X XX 1



- G-Switch Specification:**
- 1.Current rated: 3.0A AC/DC
  - 2.Voltage rating: 250V AC/DC
  - 3.Withstanding voltage: 1000V AC
  - 4.Contact resistance: 10mΩ max.
  - 5.Insulation resistance: 1000MΩ min
  - 6.Durability cycle: 50Cycles
  - 7.Removal force: 2.0kgf/Pin min
  - 8.Operating temperature range: -25°C ~ +85°C

GT-A2508TM-PBT1	Phosphor bronze	Bright Tin	AWG#22~#26	1.60mm(Max)	7000
Part NO	Material	Plating	Wire Size	Insulation O.D	Reel/PCS

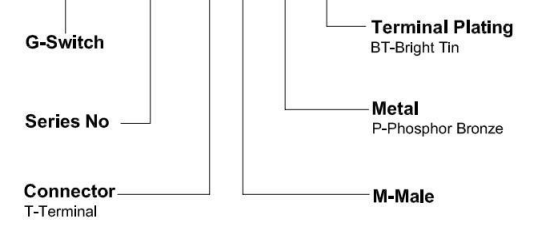

SCALE: 1:1	UNIT: mm
SIZE: A4	
Unless otherwise General Tolerance:	
X	±0.40
X.x	±0.30
X.xx	±0.20
X°	±5°
X.x°	±3°

Title: Terminal 2.50mm Pitch Crimp Style Male			
Molde Code: GT-A2508TM-XXX1			
DRAWN	CHECKED	APPROVED	DATE
Hu	Chen	Chen	2021.10.20



REV: A0	SHEET: 1/1
---------	------------