



A

B

C

D

E



4Pin






GT-C2001 H M -1 XX X 01

G-Switch


Series No

Connector  
H-Housing


M-Male

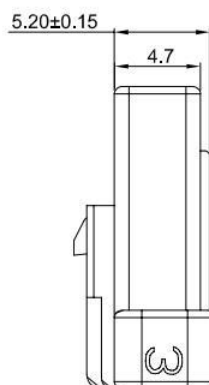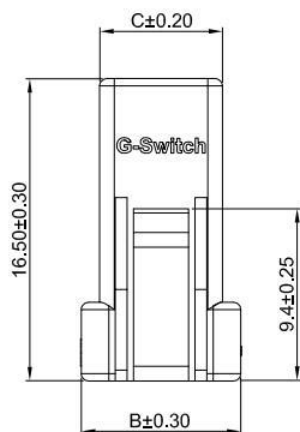Housing Colour  
W-WhitePin Q' PY  
02-04Row NO  
1-Sngle Row**G-Switch Specification:**


- 1.Current rated: 3.0A AC/DC
- 2.Voltage rating: 100V AC/DC
- 3.Withstanding voltage:1000V AC
- 4.Contact resistance: 10mΩ max.
- 5.Insulation resistance: 1000MΩ min
- 6.Durability cycle: 50Cycles
- 7.Removal force: 1.0kgf/Pin min
- 8.Operating temperature range: -40°C ~ +105°C



Circuit 1



2Pin

**Ordering Information:**

Circuit	Dimensions(mm)			Circuit	Dimensions(mm)		
	A	B	C		A	B	C
02	---	6.70	4.70	04	6.00	10.70	8.70
03	4.00	8.70	6.70	---	---	---	---

SCALE: 1:1 UNIT: mm

SIZE: A4

Title:Housing 2.00mm Pitch JWPF Single Row Male

Unless otherwise  
General Tolerance:

X ±0,40  
X.x ±0,30  
X.xx ±0,20  
X° ±5°  
X.x° ±3°

Molde Code: GT-C2001HM-1XXX01

DRAWN	CHECKED	APPROVED	DATE
Hu	Hu	Chen	2021.10.20

品贊科技®  
**b-Switch**  
www.dg-switch.com

REV: A0 SHEET: 1/1

NO.	PART NAME	MATERIAL	REMARK
1	HOUSING	PBT,94V-0	WHITE



A

B

C

D

E