
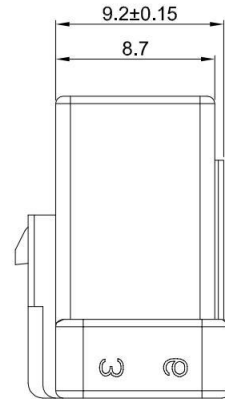





GT-C2001 H M -2 XX X 01

G-Switch
Series No
Connector
 H-Housing
M-Male
Housing Colour
 W-White
Pin Q' PY
 06-20
Row NO
 2-Dual Dows

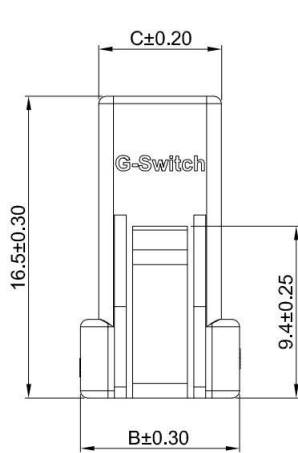

G-Switch Specification:

- 1.Current rated: 3.0A AC/DC
- 2.Voltage rating: 100V AC/DC
- 3.Withstanding voltage:1000V AC
- 4.Contact resistance: 10mΩ max.
- 5.Insulation resistance: 1000MΩ min
- 6.Durability cycle: 50Cycles
- 7.Removal force: 1.0kgf/Pin min
- 8.Operating temperature range: -40°C ~ +105°C

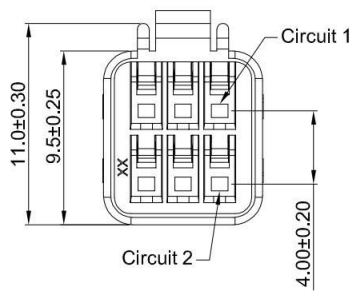

Ordering Information:

Circuit	Dimensions(mm)			Circuit	Dimensions(mm)		
	A	B	C		A	B	C
06	4.00	8.70	6.70	14	12.00	16.70	14.70
08	6.00	10.70	8.70	16	14.00	18.70	16.70
10	8.00	12.70	10.70	18	16.00	20.70	18.70
12	10.00	14.70	12.70	20	18.00	22.70	20.70

NO.	PART NAME	MATERIAL	REMARK
1	HOUSING	PBT,94V-0	WHITE



SCALE: 1:1 UNIT: mm
 SIZE: A4

Unless otherwise
 General Tolerance:
 X ±0.40
 X.x ±0.30
 X.xx ±0.20
 X° ±5°
 X.x° ±3°

Title: Housing 2.00mm Pitch JWPf Dual Dows Male

Molde Code: GT-C2001HM-2XXX01

DRAWN	CHECKED	APPROVED	DATE
Hu	Hu	Chen	2021.10.20



REV: A0 SHEET: 1/1