



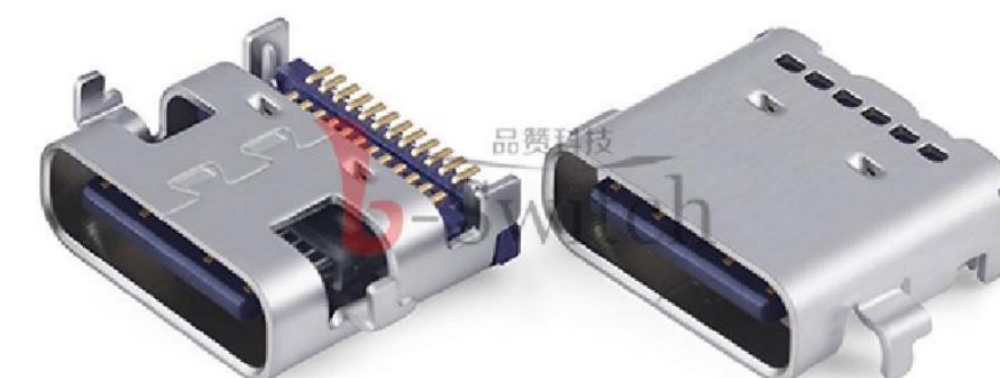


AFTER MATING

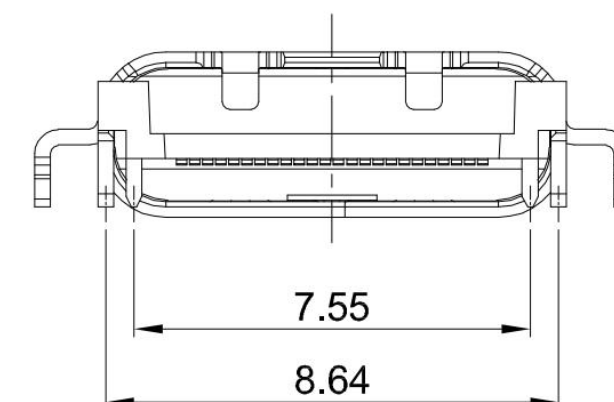

1. Current rated: 5A on vbus/1.25A on vconn/0.25A on other
Voltage rating: 24V AC
2. Withstanding voltage: 100V AC/minute
3. Contact resistance: 40mΩ Max
4. Insulation resistance: 100MΩ Min
5. Operating temperature: -40°C ~ +85°C
6. Mating force: 5N~20N
7. Unmating force: 8N~20N
8. Durability cycle: 10,000 cycles
9. Data transmission rate up to 5Gbps
10. Compliant with: IEC62680-1-3

USB IF TID:13209

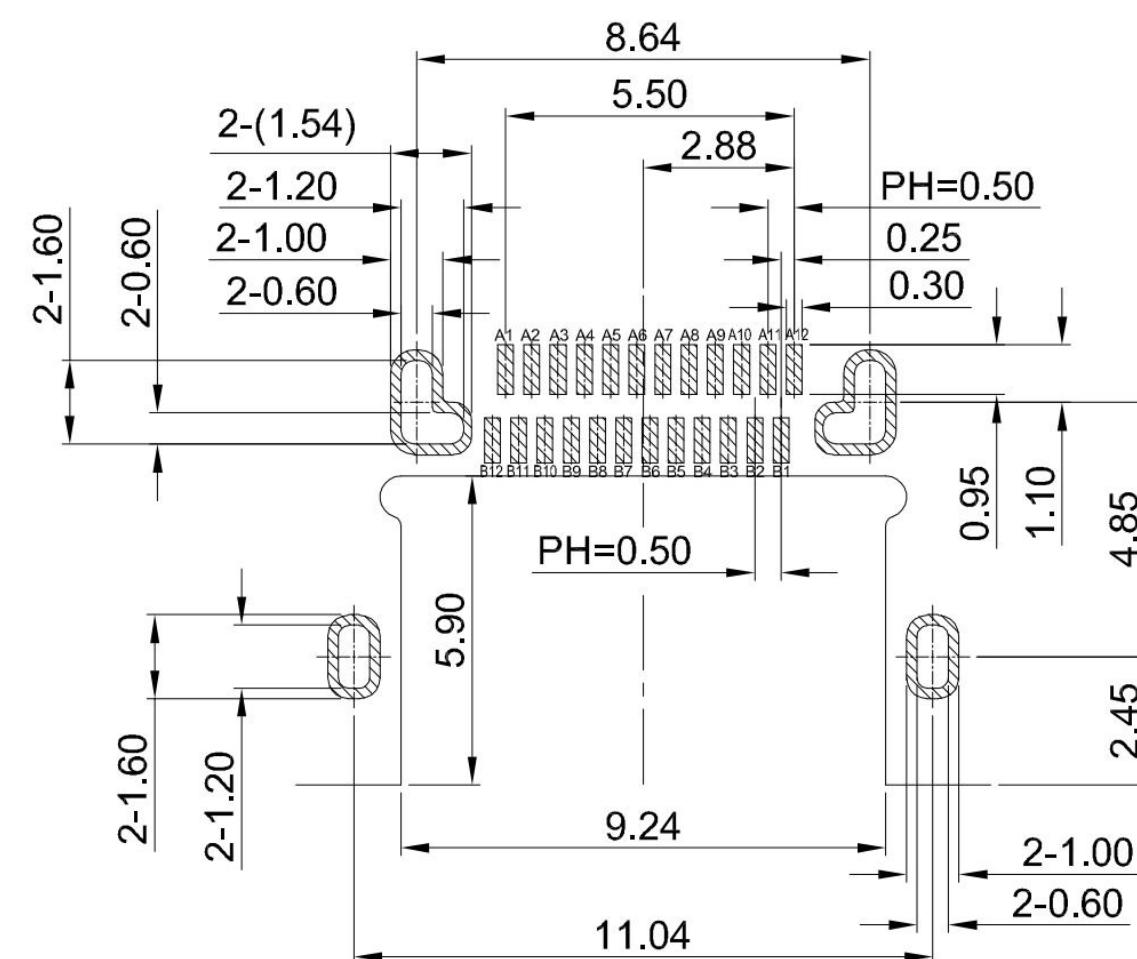

A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12
GND	TX1+	TX1-	VBUS	CC1	D+	D-	SBU1	VBUS	RX2-	RX2+	GND
First	Second	Second	First	Second	Second	Second	Second	First	Second	Second	First
B12	B11	B10	B9	B8	B7	B6	B5	B4	B3	B2	B1
GND	RX1+	RX1-	VBUS	SBU2	D-	D+	CC2	VBUS	TX2-	TX2+	GND
First	Second	Second	First	Second	Second	Second	Second	First	Second	Second	First

Three RoHS compliance logos are displayed in a row. The first logo on the left is a circle with a diagonal line through it, containing the letters 'Pb', with the text 'Process Capable' below it. The middle logo is a rounded rectangle containing the text 'RoHS Compliant' and 'EU RoHS Standards'. The third logo on the right is a circle with a diagonal line through it, containing the letters 'H', with the text 'Compliant Halogen Free' below it.

品贊科技
b-Switch
www.dg-switch.com

REV: A0	SHEET: 1/
---------	-----------