


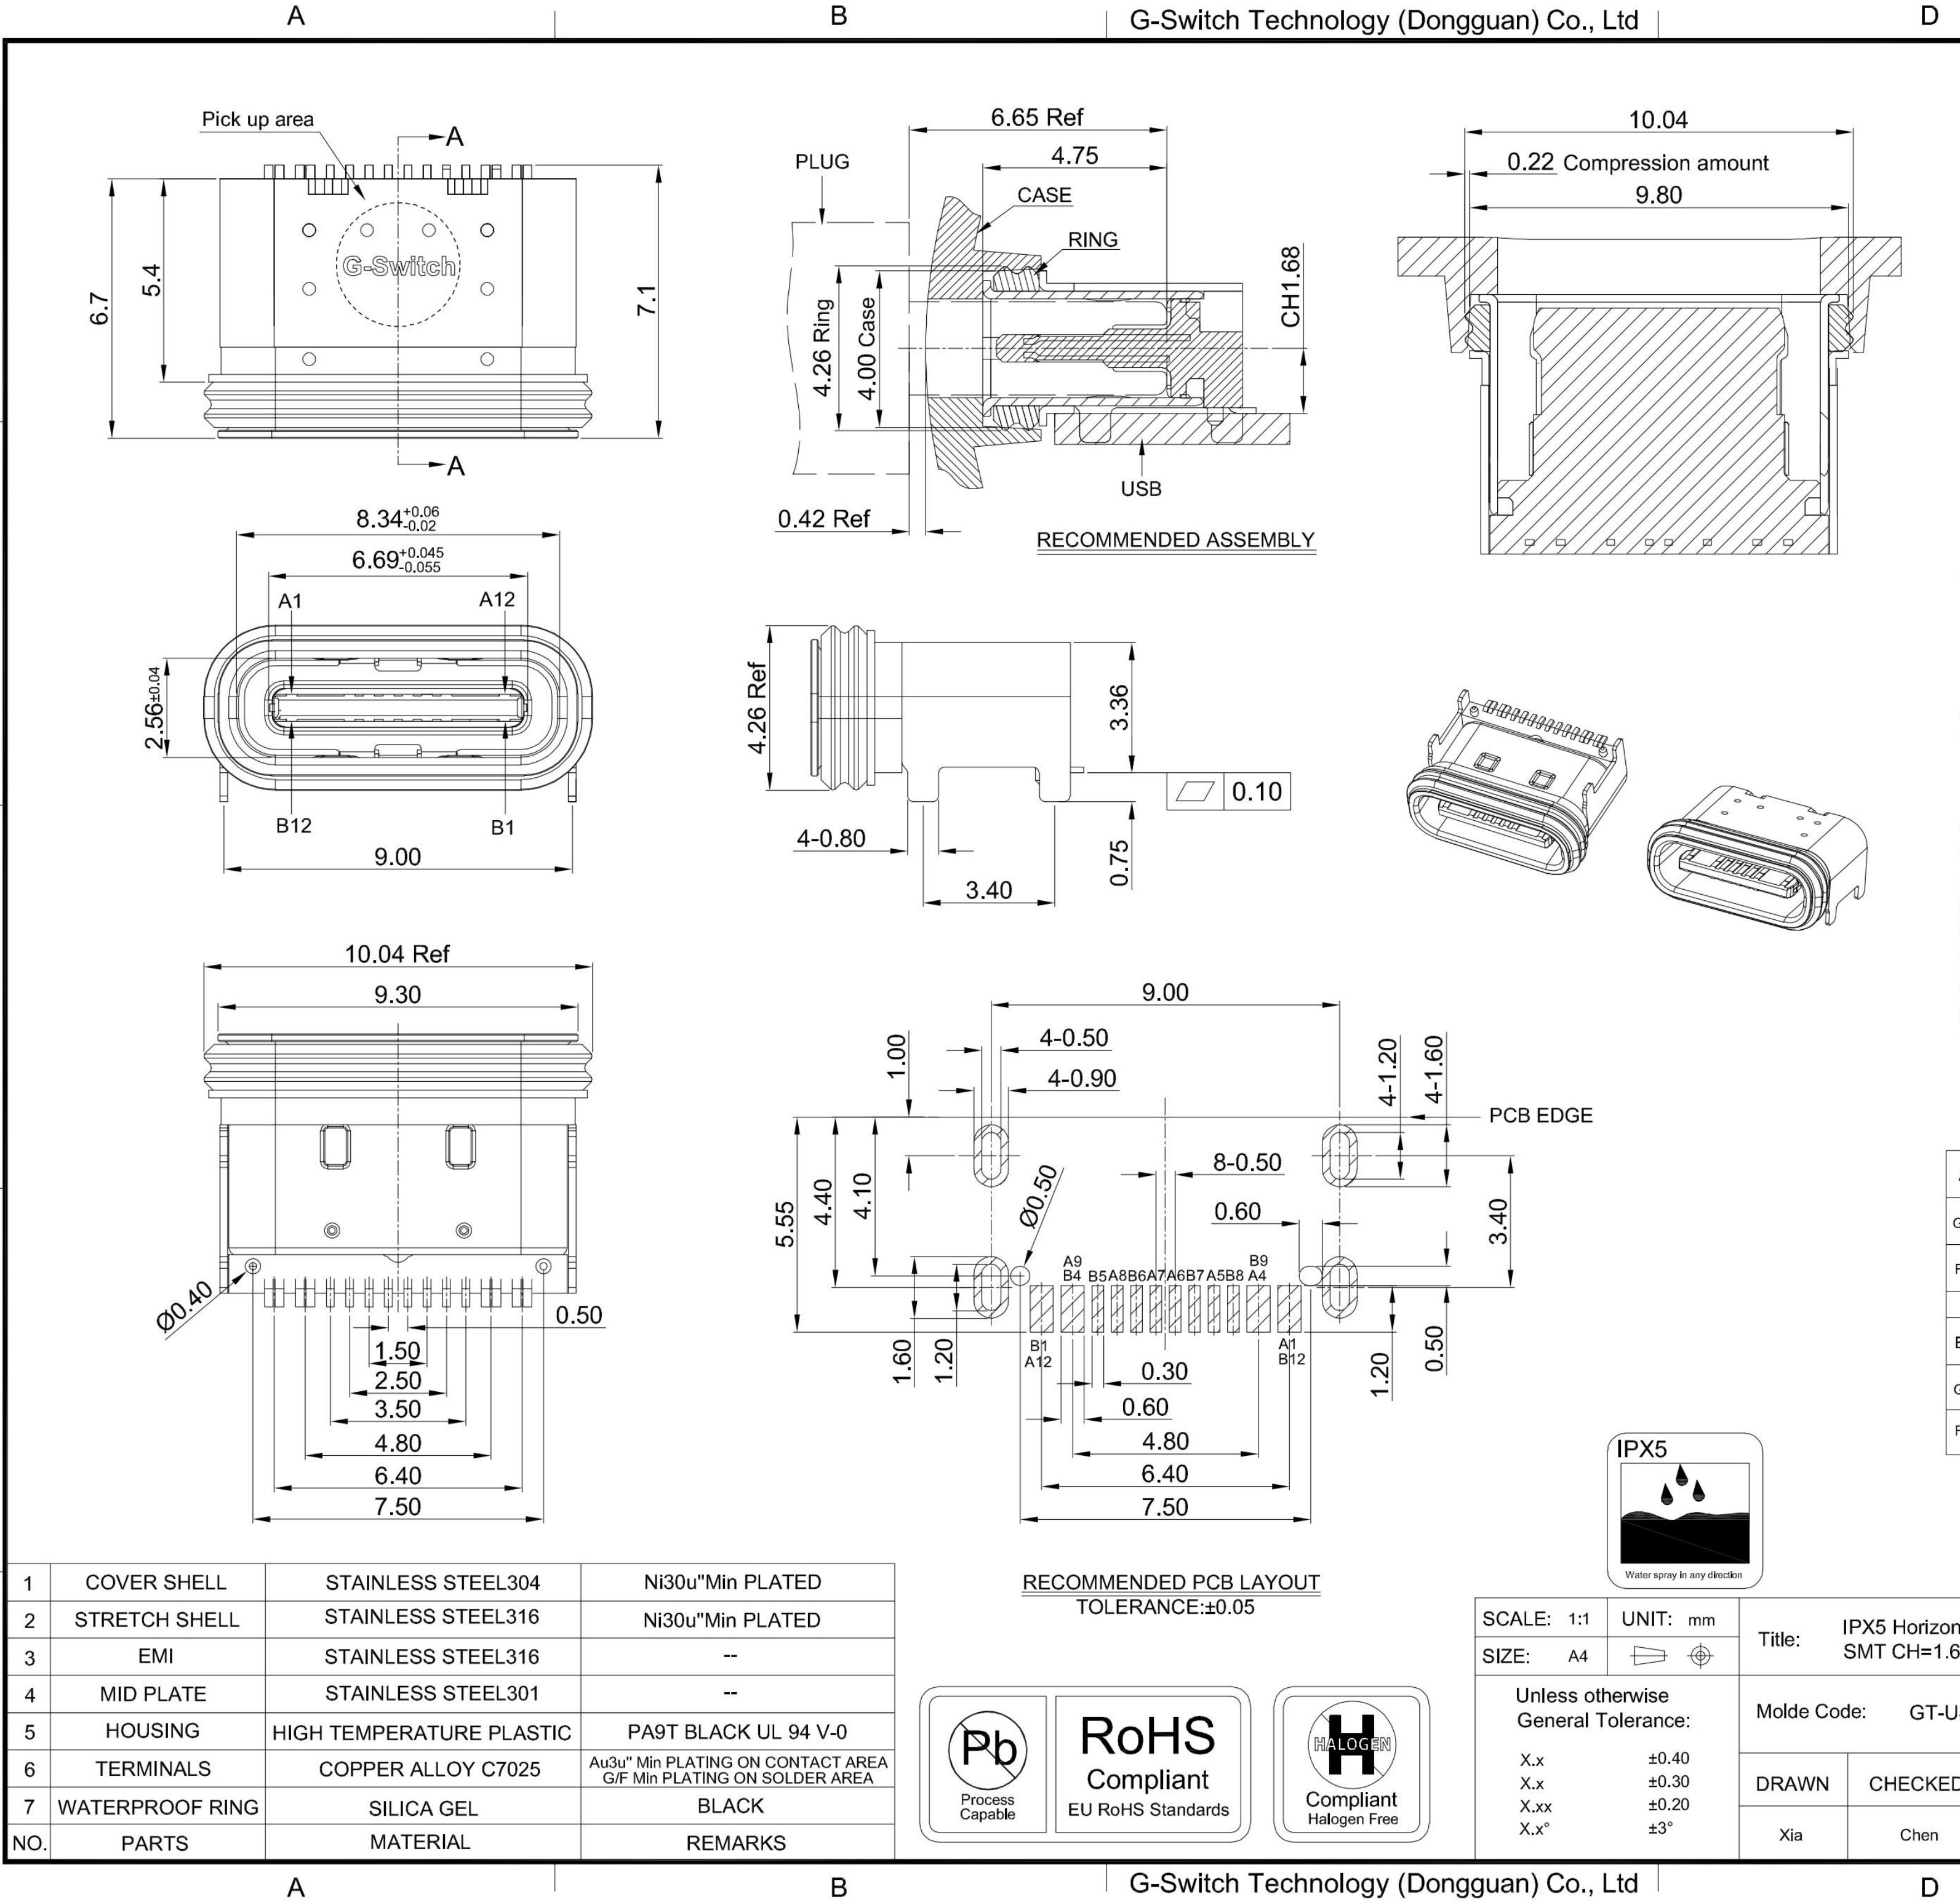

G-Switch USB-C Specification:

- Current rated: 5A on vbus/1.25A on vconn/0.25A on other
- Voltage rating: 24V AC
- Withstanding voltage: 100V AC/minute
- Contact resistance: 40mΩ Max
- Insulation resistance: 100MΩ Min
- Operating temperature: -40°C ~ +85°C
- Mating force: 5N~20N
- Unmating force: 8N~20N
- Durability cycle: 10,000 cycles
- Waterproof grade: IP-X5
- Compliant with: IEC62680-1-3

A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12
GND			VBUS	CC1	D+	D-	SBU1	VBUS			GND
First			First	Second	Second	Second	Second	First			First

B12	B11	B10	B9	B8	B7	B6	B5	B4	B3	B2	B1
GND			VBUS	SBU2	D-	D+	CC2	VBUS			GND
First			First	Second	Second	Second	Second	First			First

IPX5

Water spray in any direction

SCALE: 1:1 **UNIT:** mm

SIZE: A4

Title: IPX5 Horizontal Type-c 16P Female SMT CH=1.68 L=6.7mm

Molde Code: GT-USB-9079E

DRAWN	CHECKED	APPROVED	DATE
Xia	Chen	Chen	2024.12.01

REV: A0 **SHEET:** 1/1

品赞科技 **-Switch** **www.dg-switch.com**