


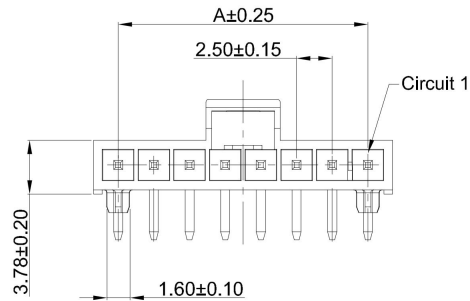
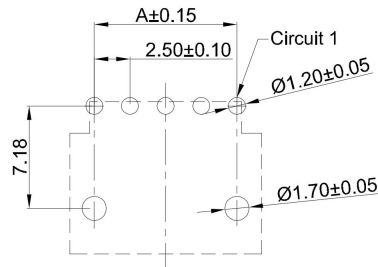


COLOR: BLACK

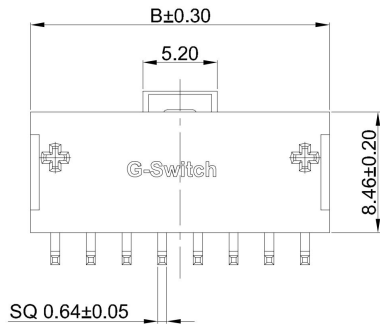

RECOMMENDED PCB LAYOUT
TOLERANCE:±0.05



COLOR: NATURE

G-Switch Specification:

- 1.Current rated: 5.0-6.5A AC/DC
- 2.Voltage rating: 250V AC/DC
- 3.Withstanding voltage: 1500V AC
- 4.Contact resistance: 20mΩ max.
- 5.Insulation resistance: 1000MΩ min
- 6.Durability cycle: 25Cycles
- 7.Removal force: 3.5kgf/Pin min
- 8.Operating temperature range: -40°C ~ +105°C



GT-A2513 W R D-1 XX X XX 01

G-Switch

Series No

Connector
W-Wafer

Angle
R-90°

Termipoint
D-DIP

Terminal Plating
BT-Bright Tin

Housing Colour
S-Nature
B-Black

Pin Q' PY
02-08

Row NO
1-Single Row

Ordering Information:

Circuit	Dimensions(mm)		Circuit	Dimensions(mm)	
	A	B		A	B
02	---	5.94	06	12.50	15.94
03	5.00	8.44	07	15.00	18.44
04	7.50	10.94	08	17.50	20.94
05	10.00	13.44	---	---	---

SCALE: 1:1 UNIT: mm
SIZE: A4

Unless otherwise
General Tolerance:
X ±0.40
X.x ±0.30
X.xx ±0.20
X" ±5°
X.x° ±3°

Title: Wafer 2.50mm Pitch MX 90° DIP
With Lock Type Single Row Connector

Molde Code: GT-A2513WRD-1XXXXX01

DRAWN	CHECKED	APPROVED	DATE
Hu	Hu	Chen	2021.10.20

品赞科技®
b-Switch
www.dg-switch.com

REV: A0 SHEET: 1/2

2	PIN MATERIAL	High Conductivity Copper Alloy	BRIGHT Tin
1	HOUSING	LCP,94V-0	BLACK/NATURE
NO.	PART NAME	MATERIAL	REMARK




A

B


C

D


E




02Pin




03Pin




04Pin




05Pin



06Pin



07Pin

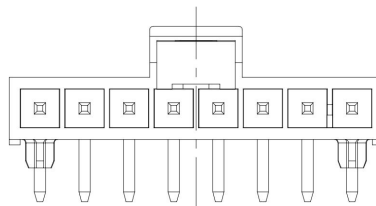

08Pin



GT-A2513 W R D-1 XX X XX 01

G-Switch

Series No

Connector
W-WaferAngle
R-90°Termipoint
D-DIPTerminal Plating
BT-Bright TinHousing Colour
S-Nature
B-BlackPin Q' PY
02~08Row NO
1-Single Row**G-Switch Specification:**

- 1.Current rated: 5.0-6.5A AC/DC
- 2.Voltage rating: 250V AC/DC
- 3.Withstanding voltage: 1500V AC
- 4.Contact resistance: 20mΩ max.
- 5.Insulation resistance: 1000MΩ min
- 6.Durability cycle: 25Cycles
- 7.Removal force: 3.5kgf/Pin min
- 8.Operating temperature range: -40°C ~ +105°C

Ordering Information:

Circuit	Dimensions(mm)		Circuit	Dimensions(mm)	
	A	B		A	B
02	---	5.94	06	12.50	15.94
03	5.00	8.44	07	15.00	18.44
04	7.50	10.94	08	17.50	20.94
05	10.00	13.44	---	---	---

SCALE: 1:1 UNIT: mm

SIZE: A4

Unless otherwise
General Tolerance:

X	±0.40
X.x	±0.30
X.xx	±0.20
X°	±5°
X.x°	±3°

Title: Wafer 2.50mm Pitch MX 90° DIP
With Lock Type Single Row Connector

Molde Code: GT-A2513WRD-1XXXXX01

DRAWN	CHECKED	APPROVED	DATE
Hu	Hu	Chen	2021.10.20

 品赞科技®
www.dg-switch.com

REV: A0 SHEET: 2/2

2	PIN MATERIAL	High Conductivity Copper Alloy	BRIGHT Tin
1	HOUSING	LCP,94V-0	BLACK/NATURE
NO.	PART NAME	MATERIAL	REMARK

