

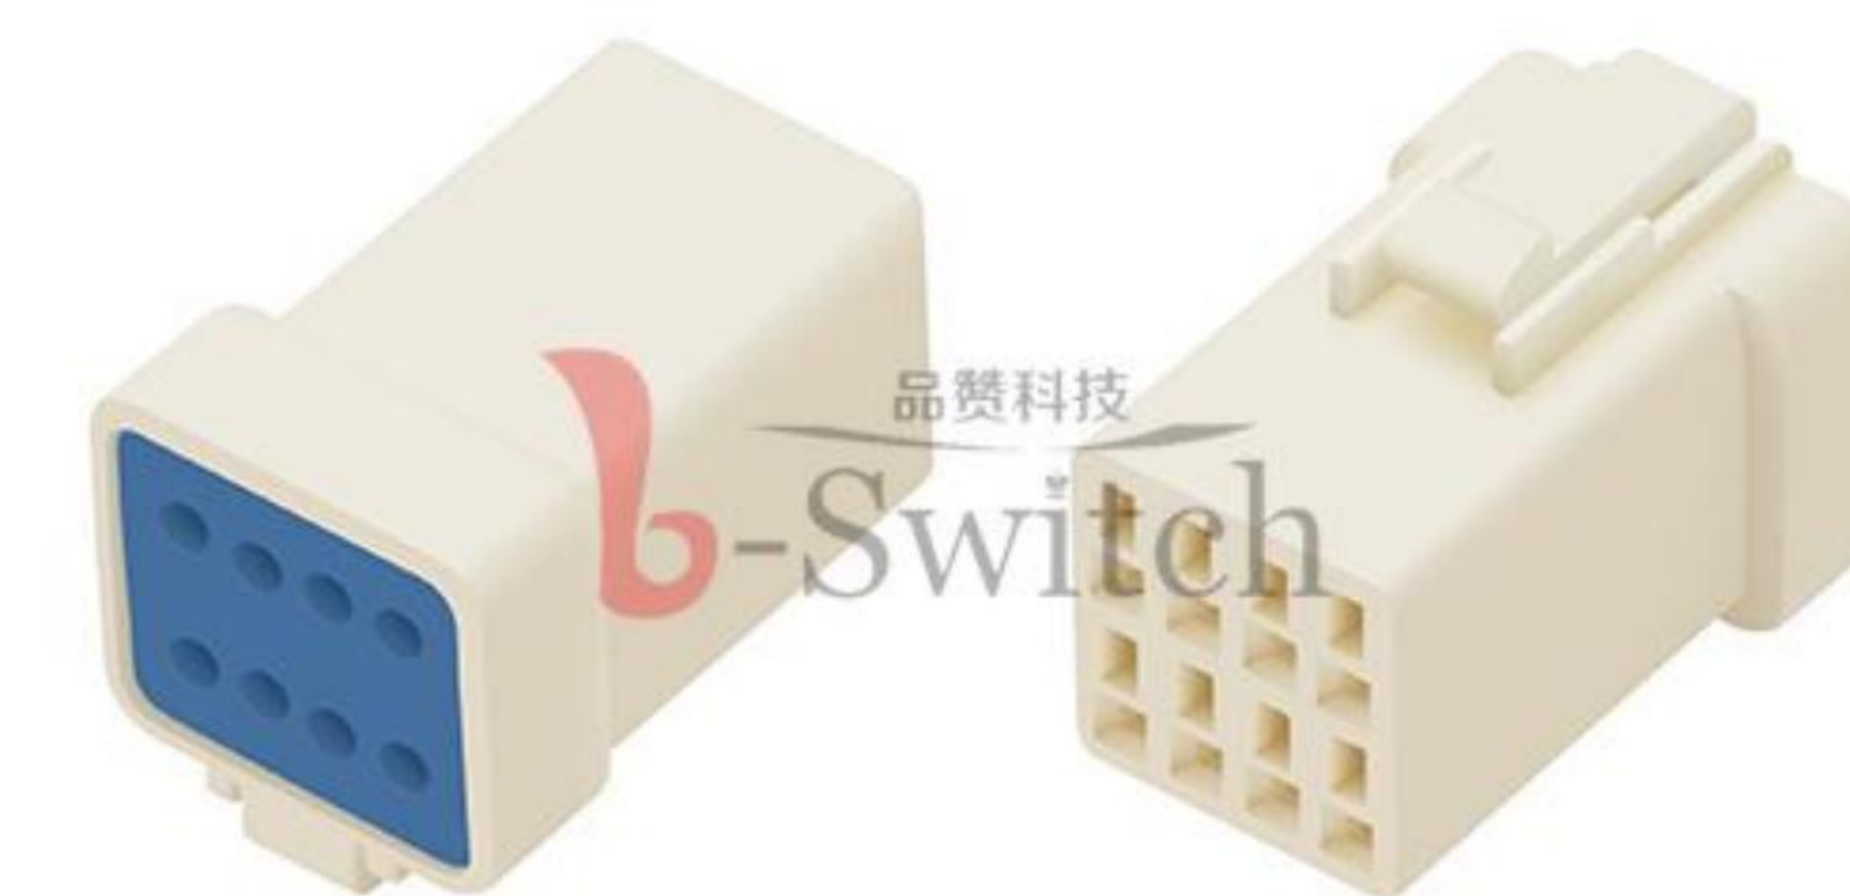


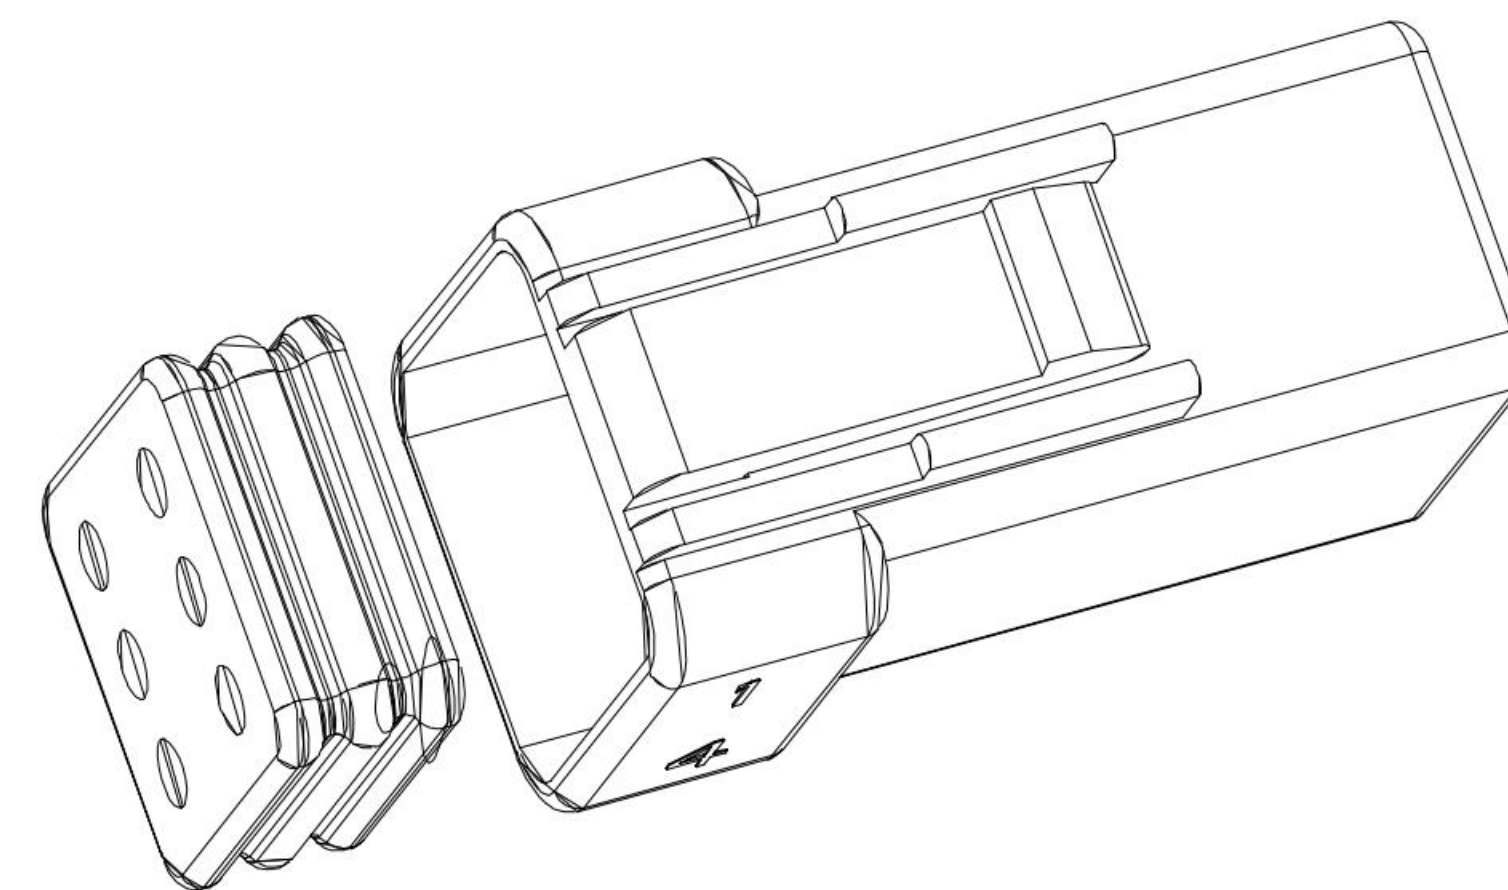

— **Row NO**
2-Dual Dows

- 1.Current rated: 3.0A AC/DC
- 2.Voltage rating: 100V AC/DC
- 3.Withstanding voltage:1000V AC
- 4.Contact resistance: 10mΩ max.
- 5.Insulation resistance: 1000MΩ min
- 6.Durability cycle: 50Cycles
- 7.Removal force: 1.0kgf/Pin min
- 8.Operating temperature range: -40℃ ~ +105℃

Circuit	Dimensions(mm)			Circuit	Dimensions(mm)		
	A	B	C		A	B	C
06	4.00	8.70	6.70	14	12.00	16.70	14.70
08	6.00	10.70	8.70	16	14.00	18.70	16.70
10	8.00	12.70	10.70	18	16.00	20.70	18.70
12	10.00	14.70	12.70	20	18.00	22.70	20.70

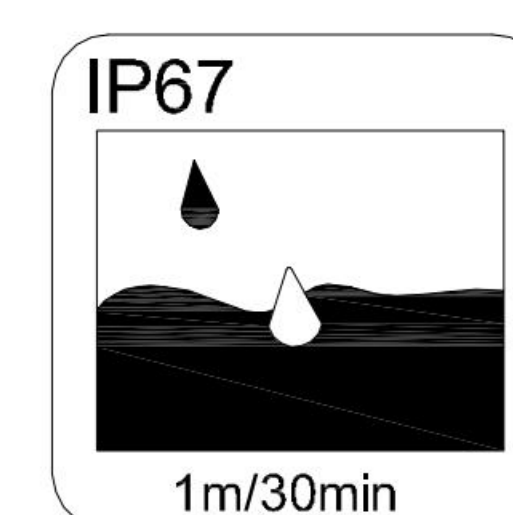

Unless otherwise
General Tolerance:

X	±0.40
X.x	±0.30
X.xx	±0.20
X°	±5°
X.X°	±3°

DRAWN	CHECKED	APPROVED	DATE
Hu	Hu	Chen	2021.10.20



1	HOUSING	PBT,94V-0	WHITE
NO.	PART NAME	MATERIAL	REMARK

