


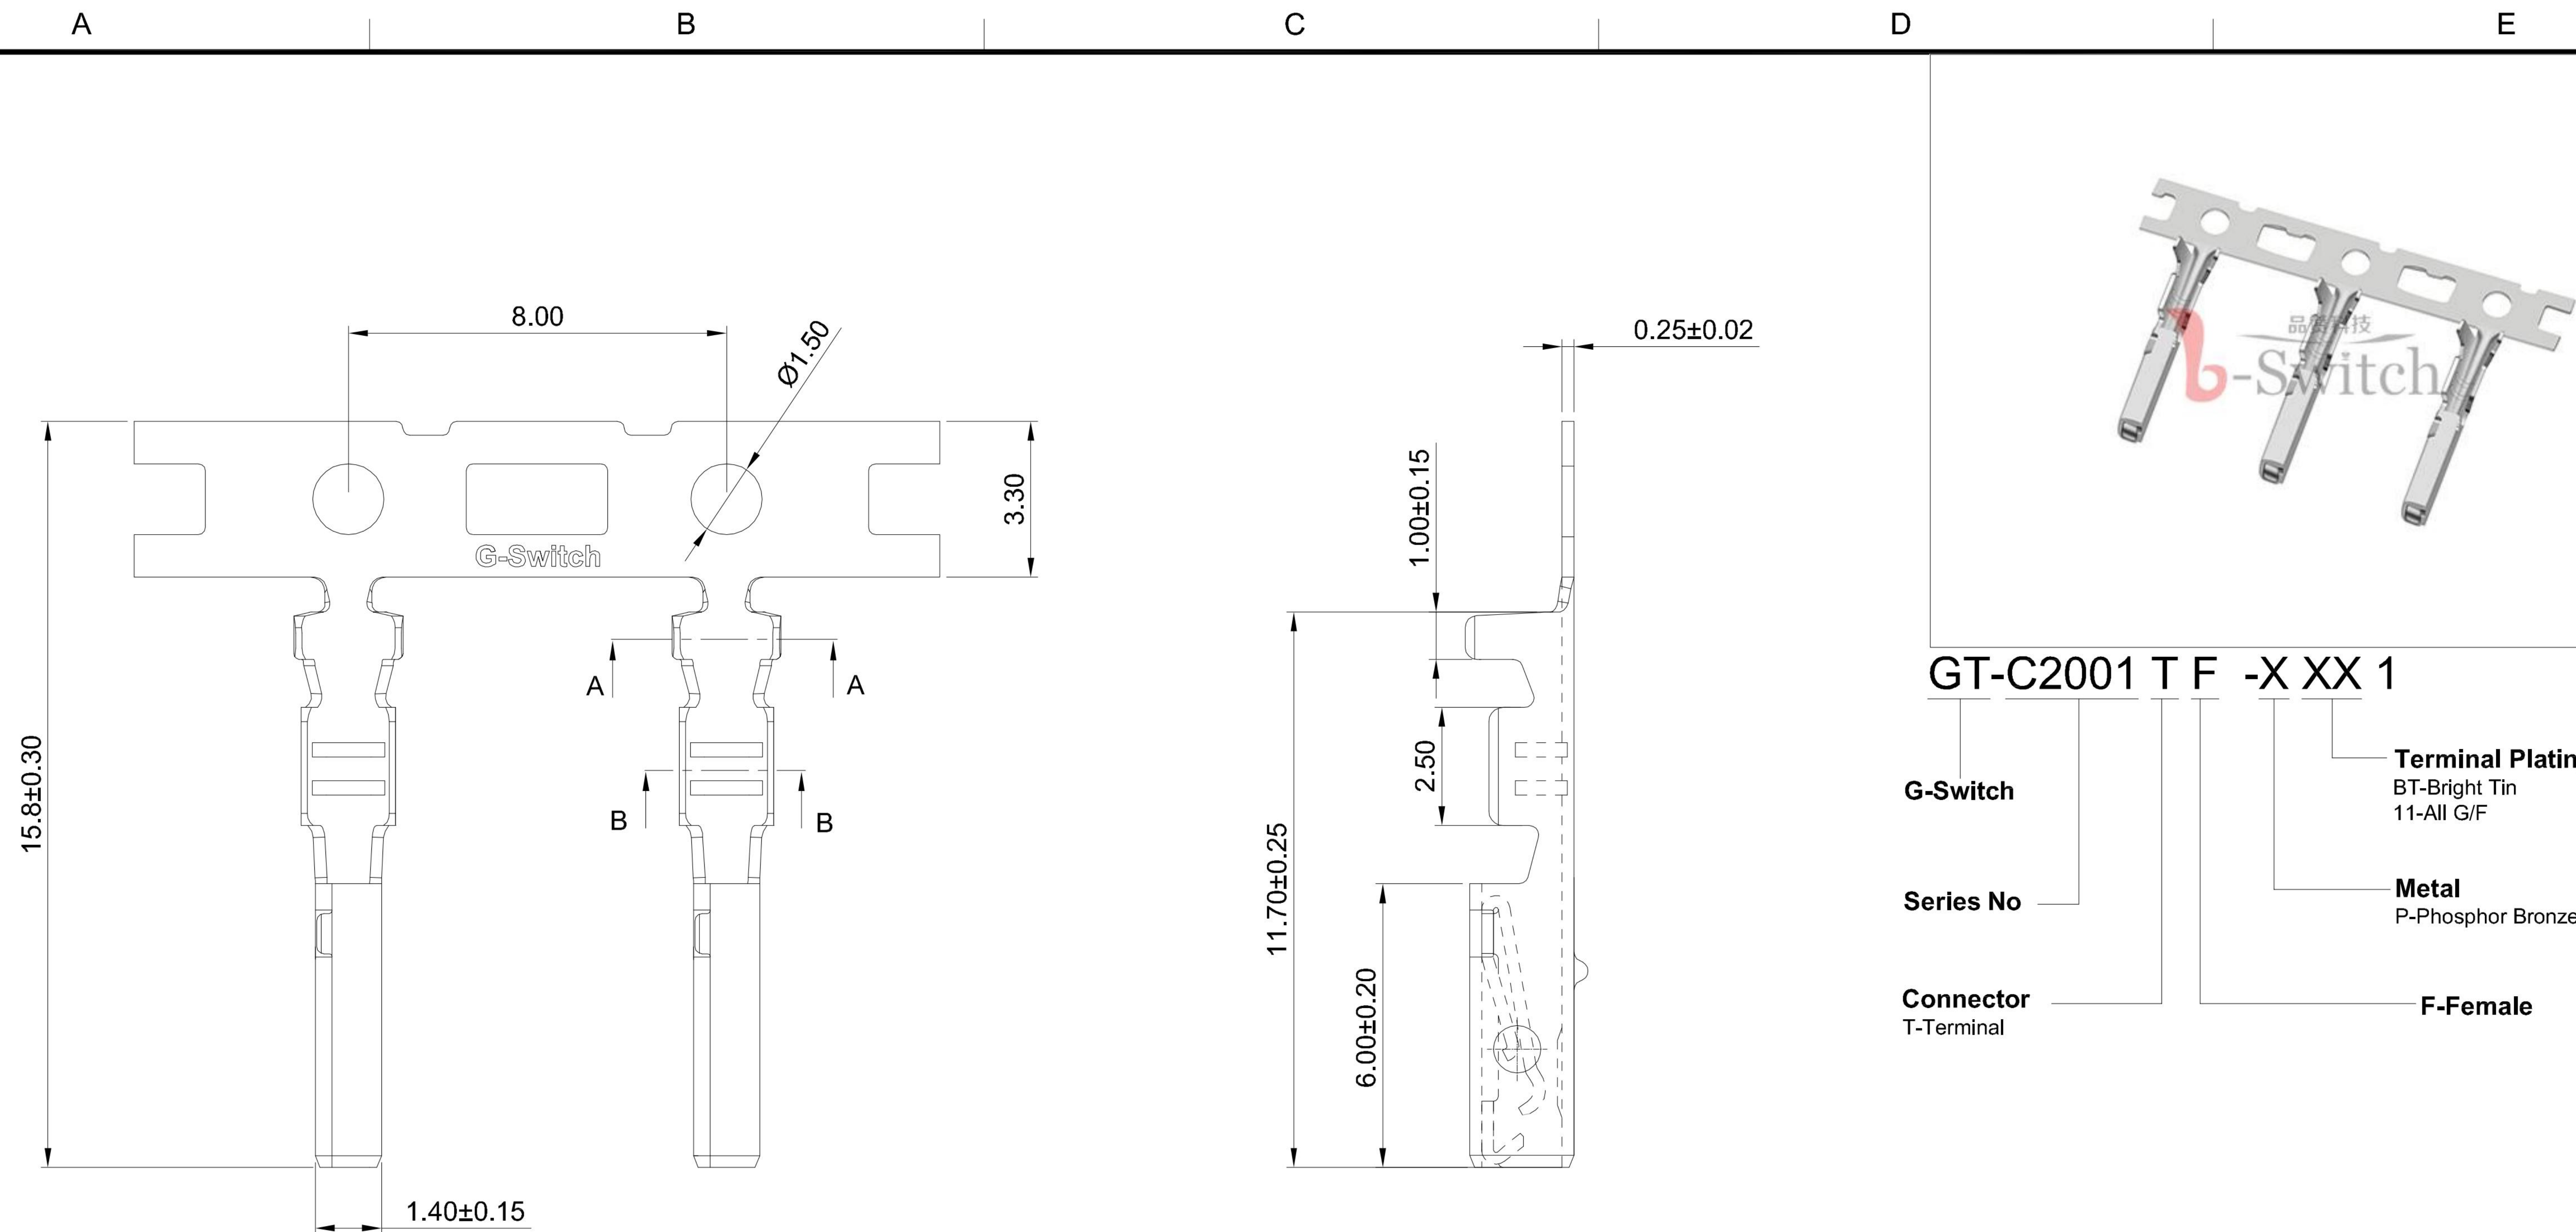

GT-C2001 T F -X XX 1

G-Switch



Series No

Connector
T-Terminal

Terminal Plating
BT-Bright Tin
11-All G/F

Metal
P-Phosphor Bronze

F-Female

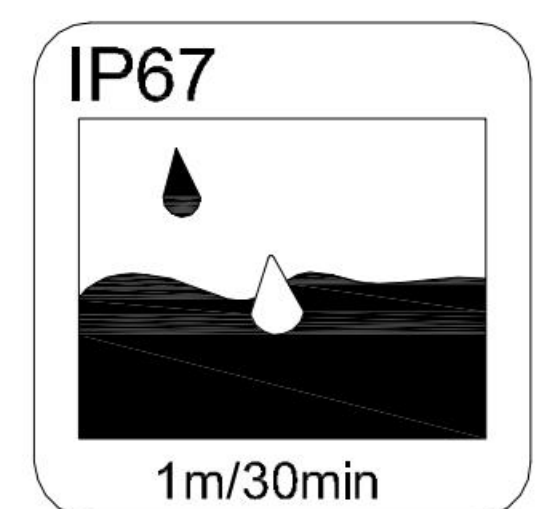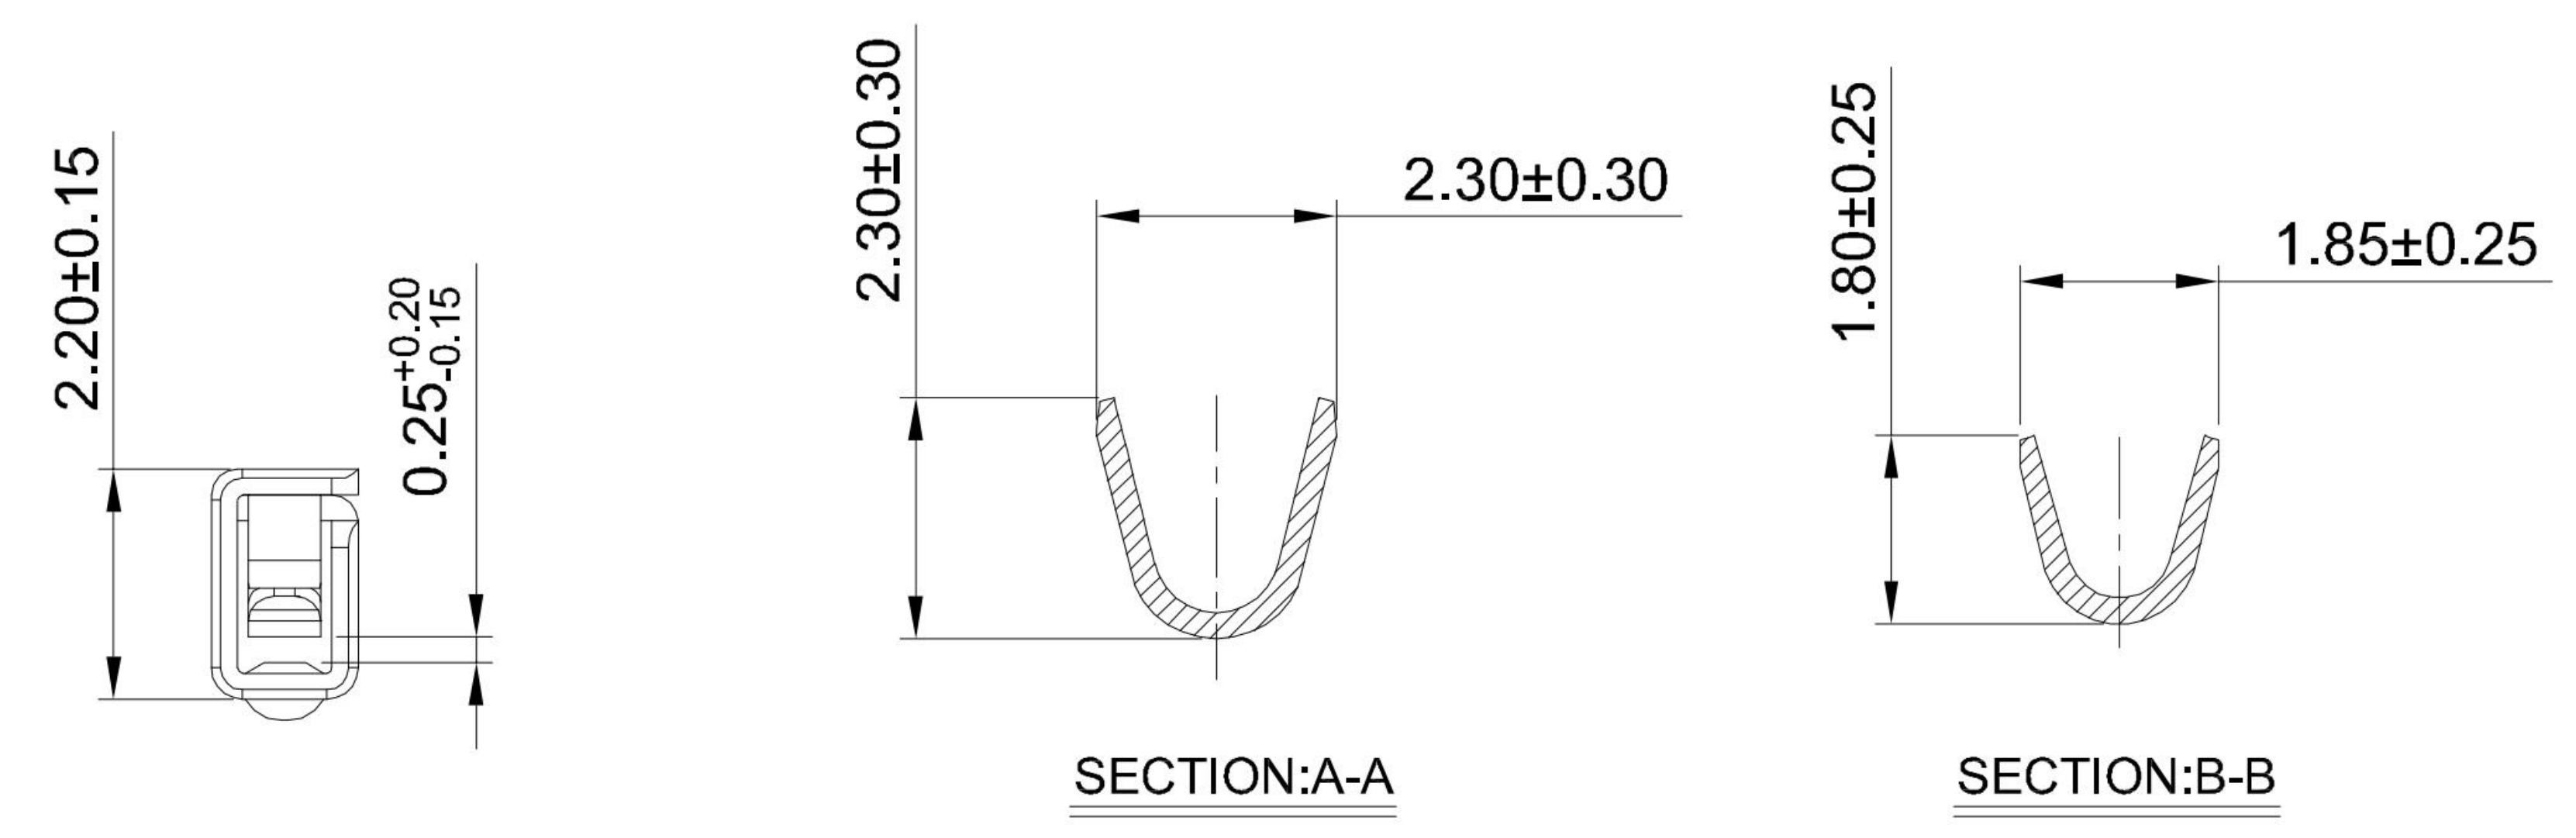

- G-Switch Specification:**
- 1.Current rated: 3.0A AC/DC
 - 2.Voltage rating: 100V AC/DC
 - 3.Withstanding voltage:1000V AC
 - 4.Contact resistance: 10mΩ max.
 - 5.Insulation resistance: 1000MΩ min
 - 6.Durability cycle: 50Cycles
 - 7.Removal force: 1.0kgf/Pin min
 - 8.Operating temperature range: -40℃ ~ +105℃

GT-C2001TF-P111	Phosphor bronze	All G/F	AWG#22~#26	1.60mm(Max)	9000
GT-C2001TF-PBT1	Phosphor bronze	Bright Tin	AWG#22~#26	1.60mm(Max)	9000
Part NO	Material	Plating	Wire Size	Insulation O.D	Reel/PCS



SCALE: 1:1	UNIT: mm	Title: Terminal 2.00mm Pitch JWPF Crimp Style Female			
SIZE: A4		Molde Code: GT-C2001TF-XXX1			
Unless otherwise General Tolerance:		DRAWN	CHECKED	APPROVED	DATE
X ±0.40		Hu	Chen	Chen	2021.10.20
X.x ±0.30					
X.xx ±0.20					
X° ±5°					
X.x° ±3°					



REV: A0

SHEET: 1/1