


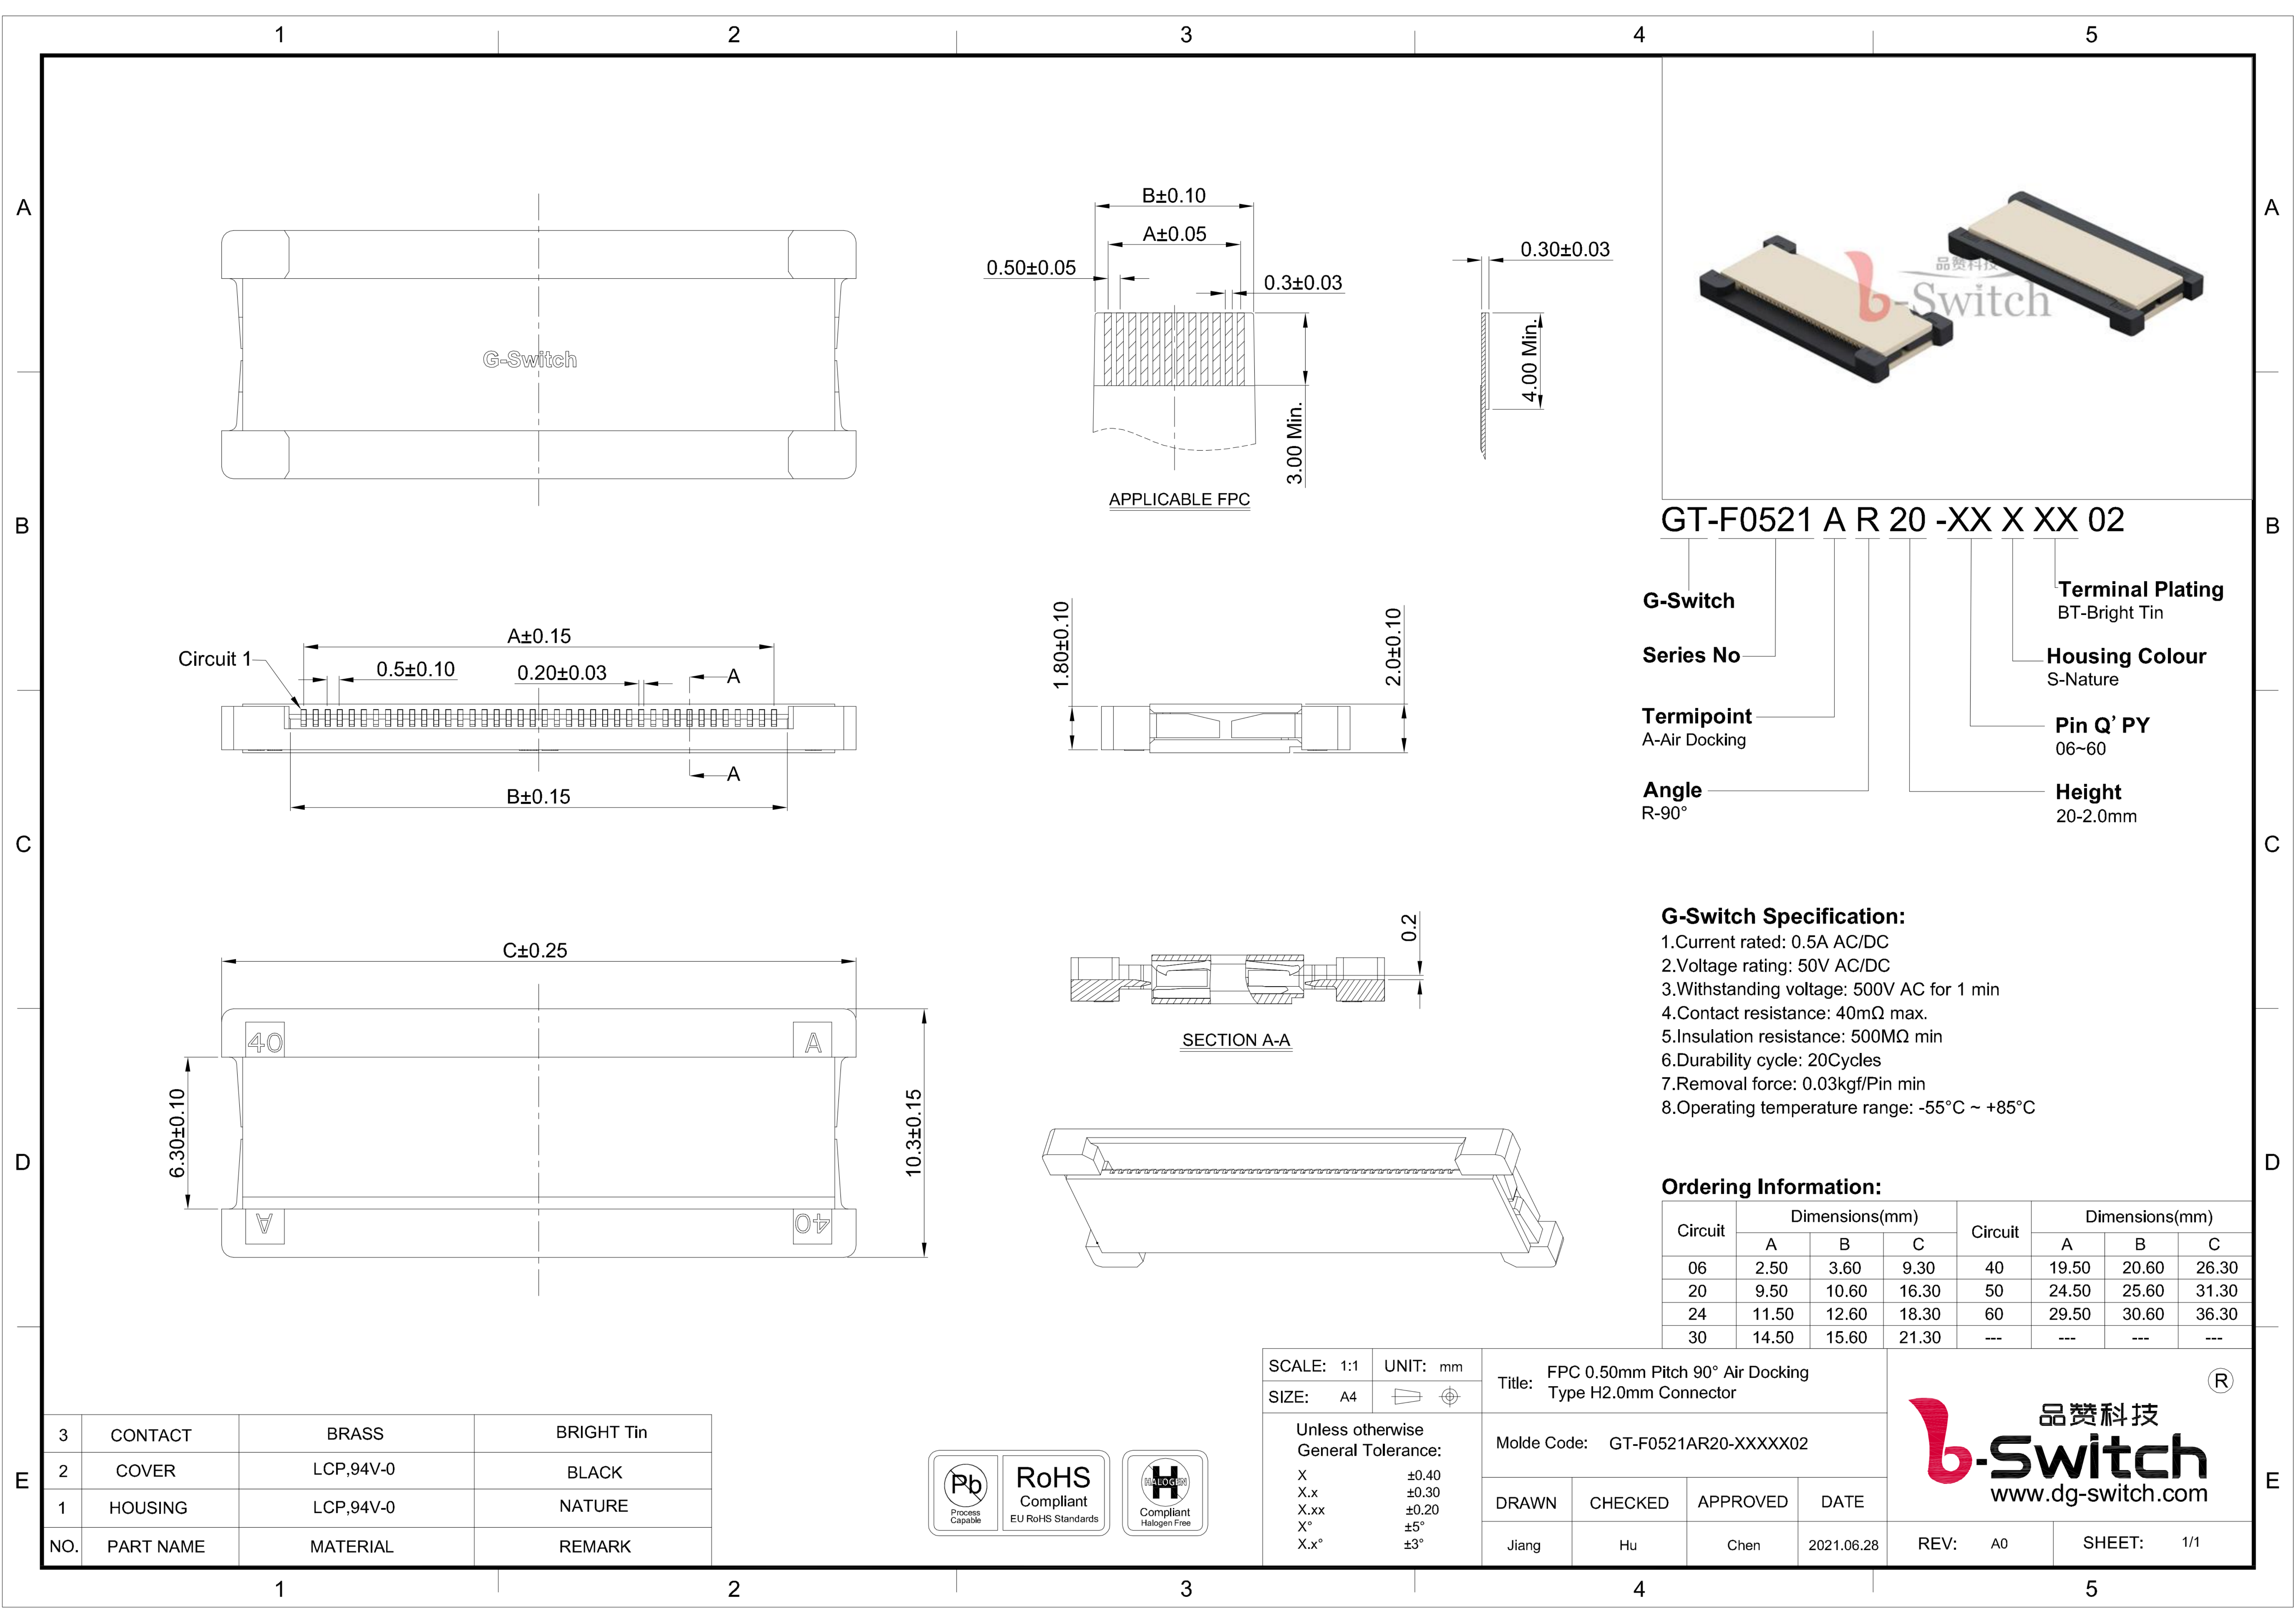

GT-F0521 A R 20 -XX X XX 02

- G-Switch
- Series No
- Termipoint
A-Air Docking
- Angle
R-90°
- Terminal Plating
BT-Bright Tin
- Housing Colour
S-Nature
- Pin Q' PY
06~60
- Height
20-2.0mm

G-Switch Specification:

- 1.Current rated: 0.5A AC/DC
- 2.Voltage rating: 50V AC/DC
- 3.Withstanding voltage: 500V AC for 1 min
- 4.Contact resistance: 40mΩ max.
- 5.Insulation resistance: 500MΩ min
- 6.Durability cycle: 20Cycles
- 7.Removal force: 0.03kgf/Pin min
- 8.Operating temperature range: -55°C ~ +85°C

Ordering Information:

Circuit	Dimensions(mm)			Circuit	Dimensions(mm)		
	A	B	C		A	B	C
06	2.50	3.60	9.30	40	19.50	20.60	26.30
20	9.50	10.60	16.30	50	24.50	25.60	31.30
24	11.50	12.60	18.30	60	29.50	30.60	36.30
30	14.50	15.60	21.30	---	---	---	---

3	CONTACT	BRASS	BRIGHT Tin
2	COVER	LCP,94V-0	BLACK
1	HOUSING	LCP,94V-0	NATURE
NO.	PART NAME	MATERIAL	REMARK



SCALE: 1:1	UNIT: mm	Title: FPC 0.50mm Pitch 90° Air Docking Type H2.0mm Connector			
SIZE: A4		Title: FPC 0.50mm Pitch 90° Air Docking Type H2.0mm Connector			
Unless otherwise General Tolerance: X ±0.40 X.x ±0.30 X.xx ±0.20 X° ±5° X.x° ±3°		Molde Code: GT-F0521AR20-XXXXX02			
		DRAWN	CHECKED	APPROVED	DATE
		Jiang	Hu	Chen	2021.06.28



REV: A0 SHEET: 1/1