



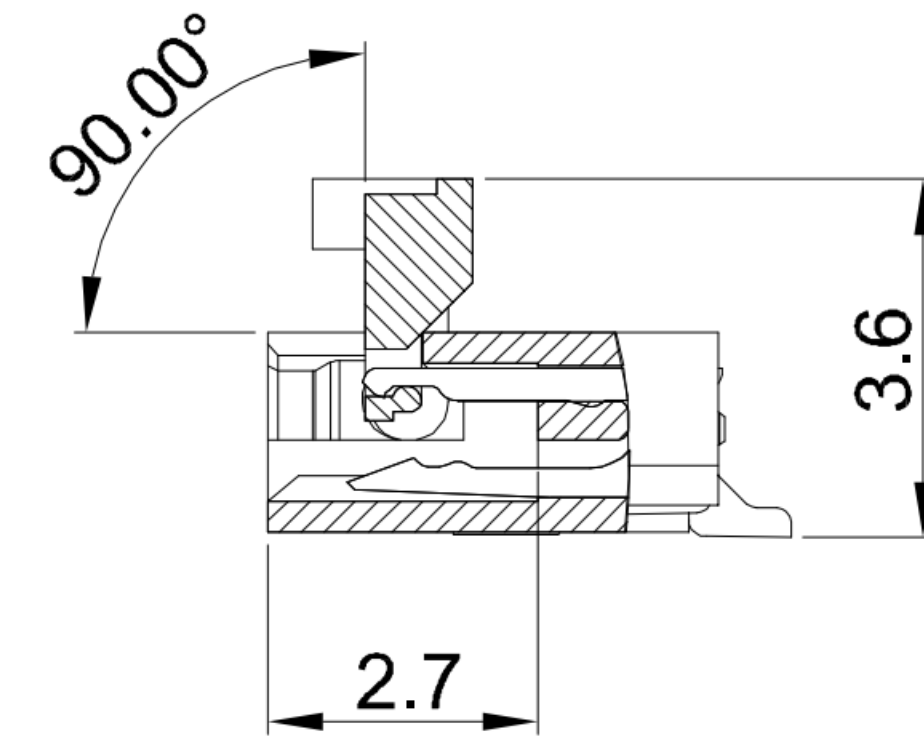

SECTION:A-A

G-Switch Specification:

- 1.Current rated: 0.5A AC/DC
- 2.Voltage rating: 50V AC/DC
- 3.Withstanding voltage: 500V AC
- 4.Contact resistance: 30mΩ max.
- 5.Insulation resistance: 500MΩ min
- 6.Durability cycle: 30Cycles
- 7.Removal force: 0.04kgf/Pin min
- 8.Operating temperature range: -25°C ~ +85°C

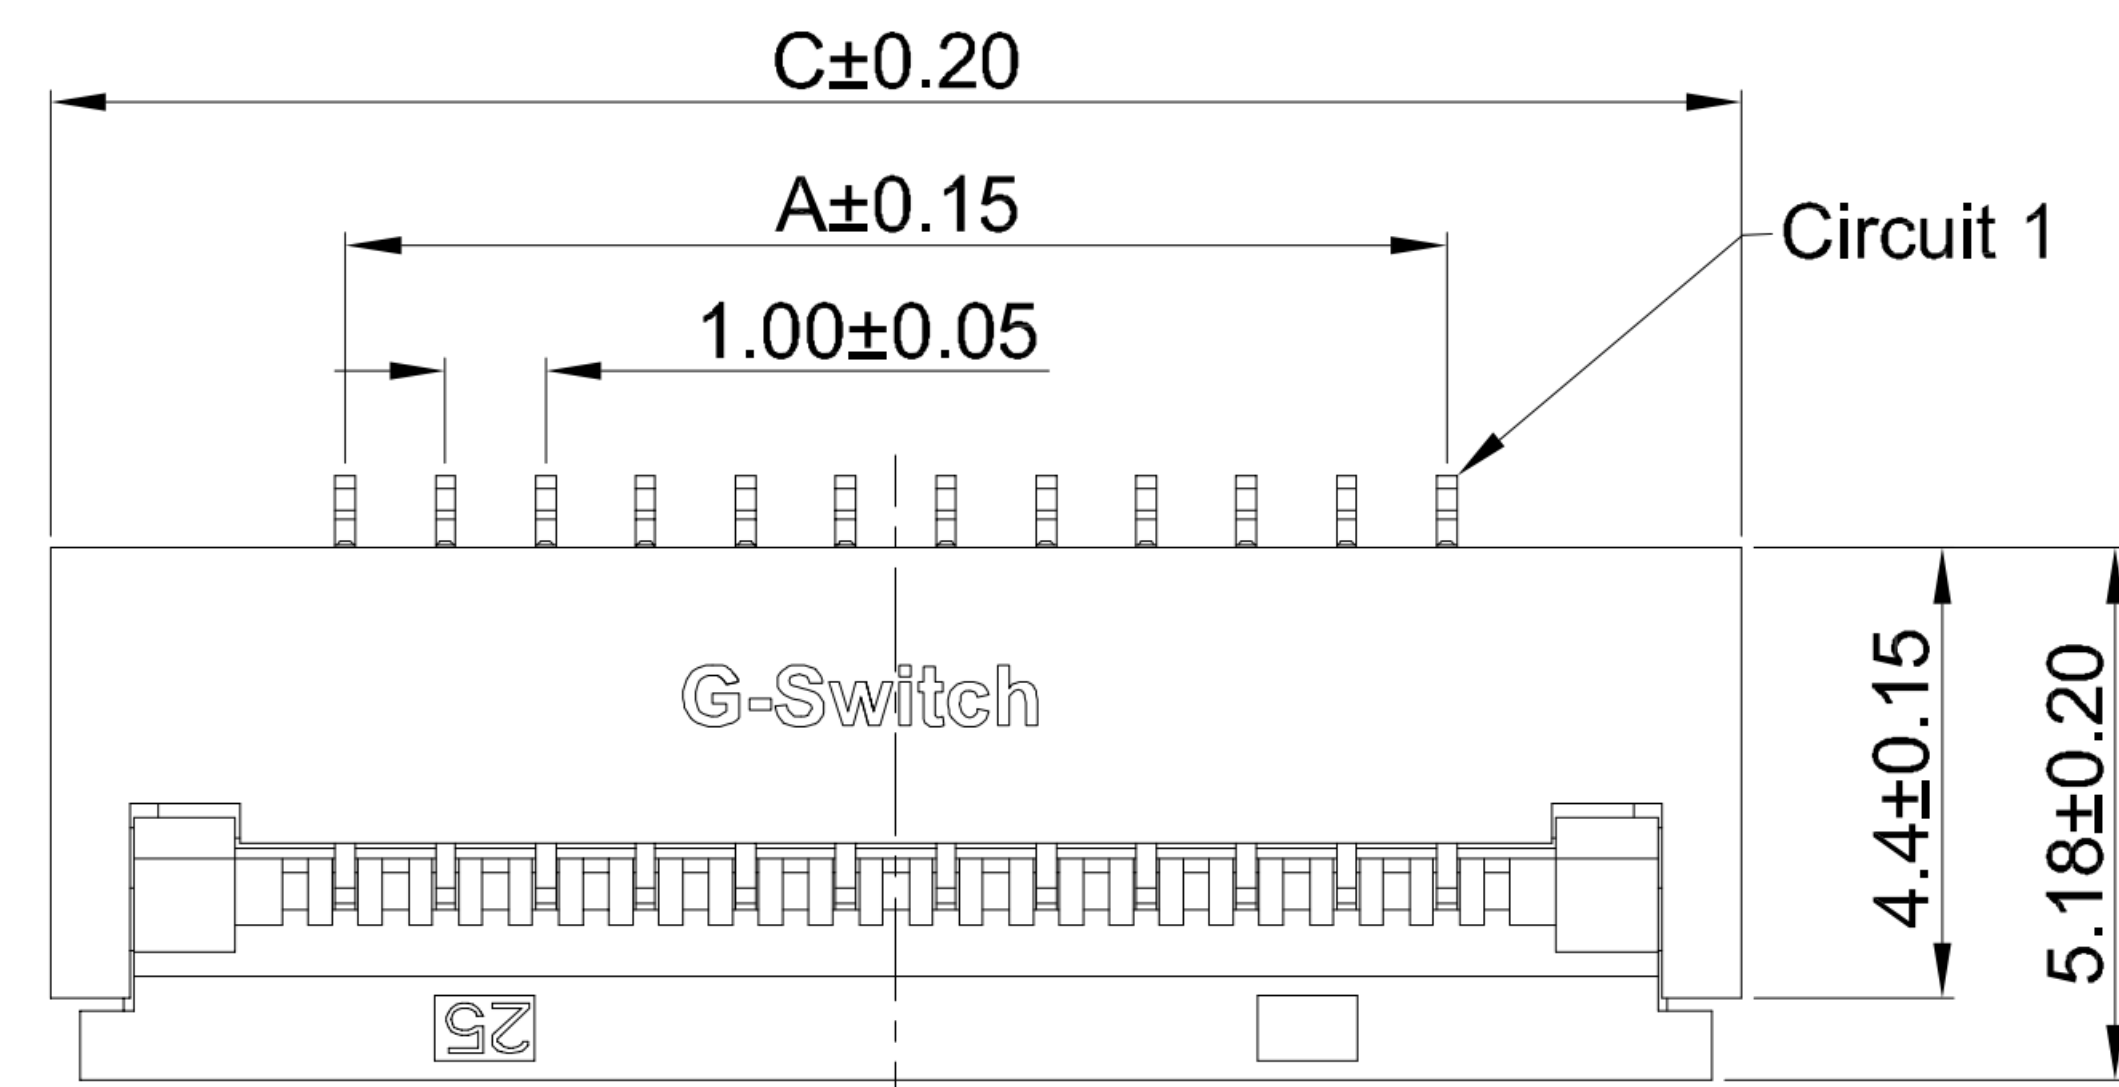

GT-F1008 S R 20 -XX X XX 01

G-Switch

Series No

Termipoint
S-SMT

Angle
R-90°







Terminal Plating

MT-Matte tin
01-G/F



Housing Colour
S-Nature

Pin Q' PY
04~32

Height
20-2.0mm

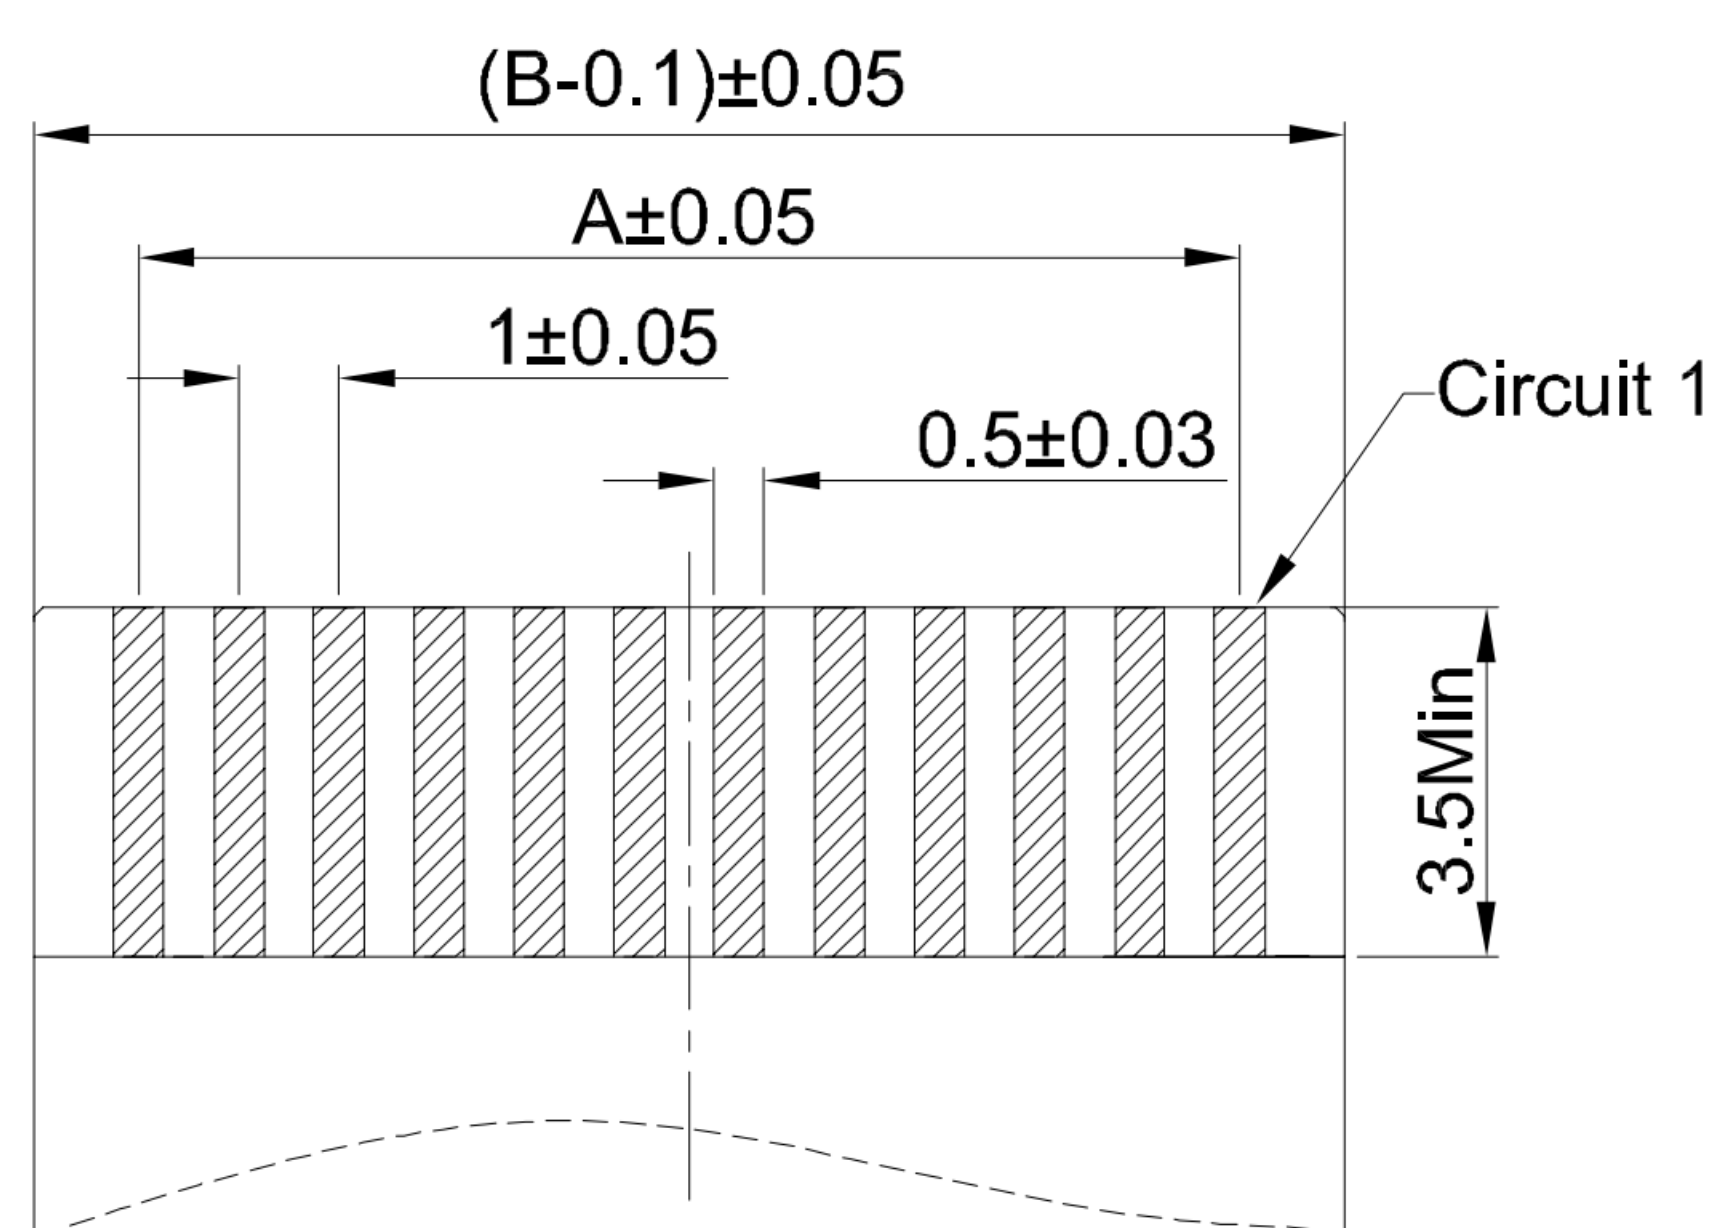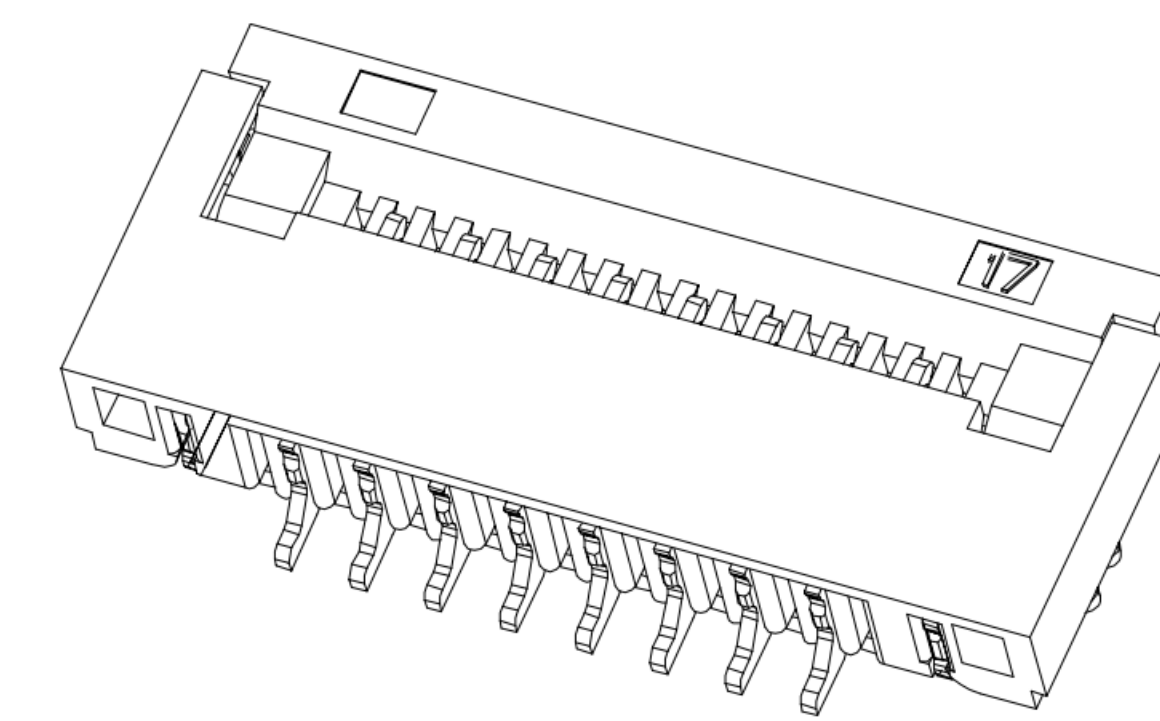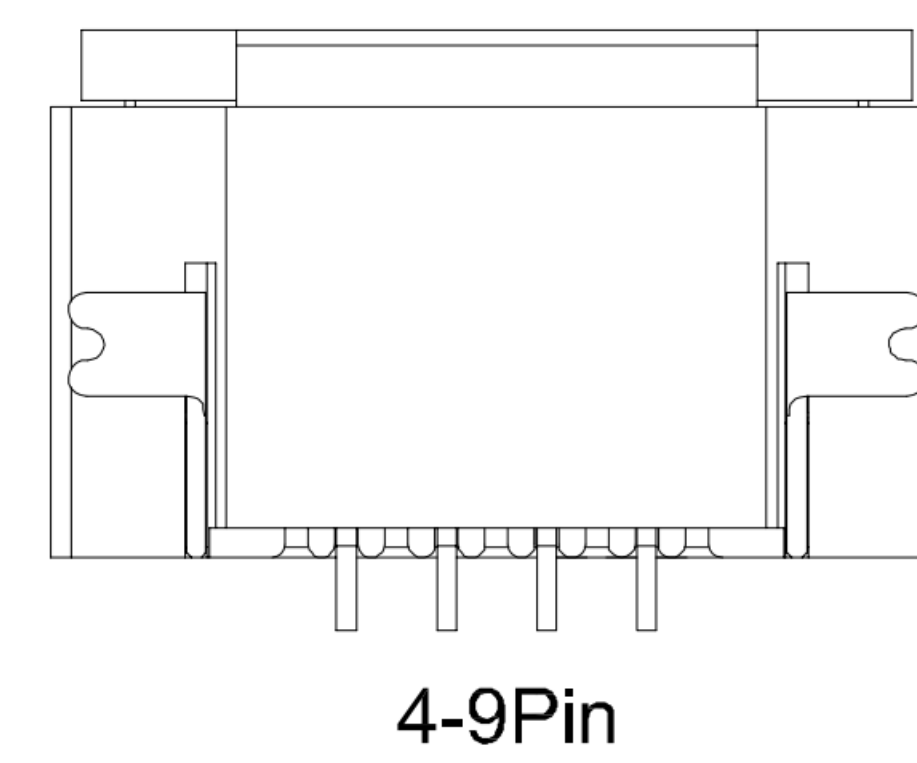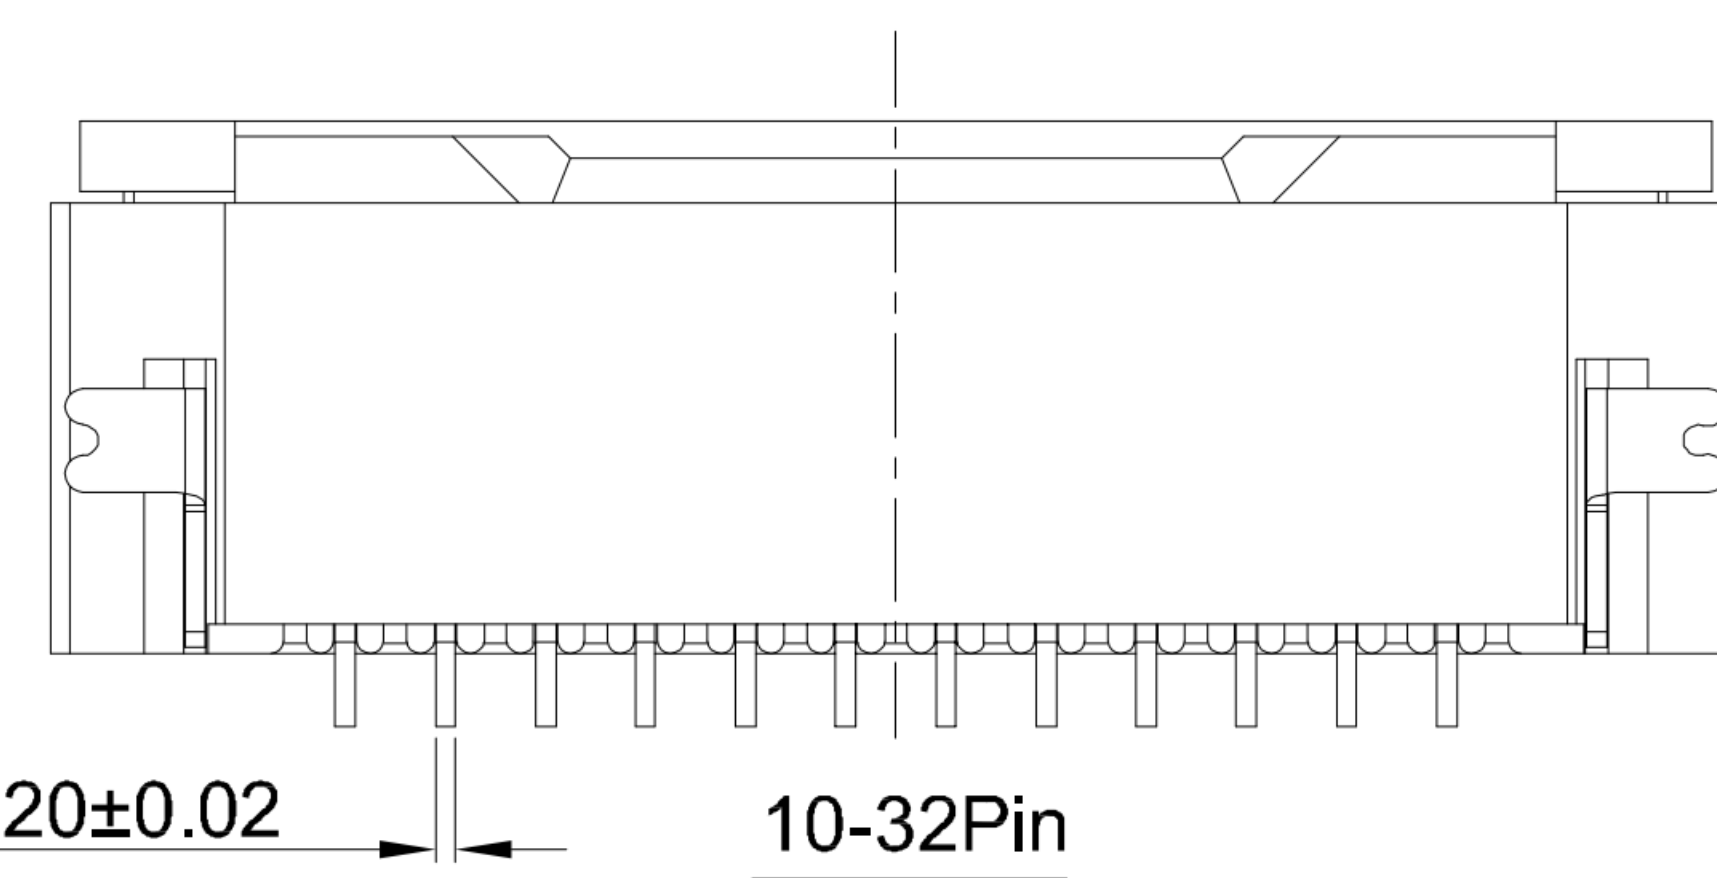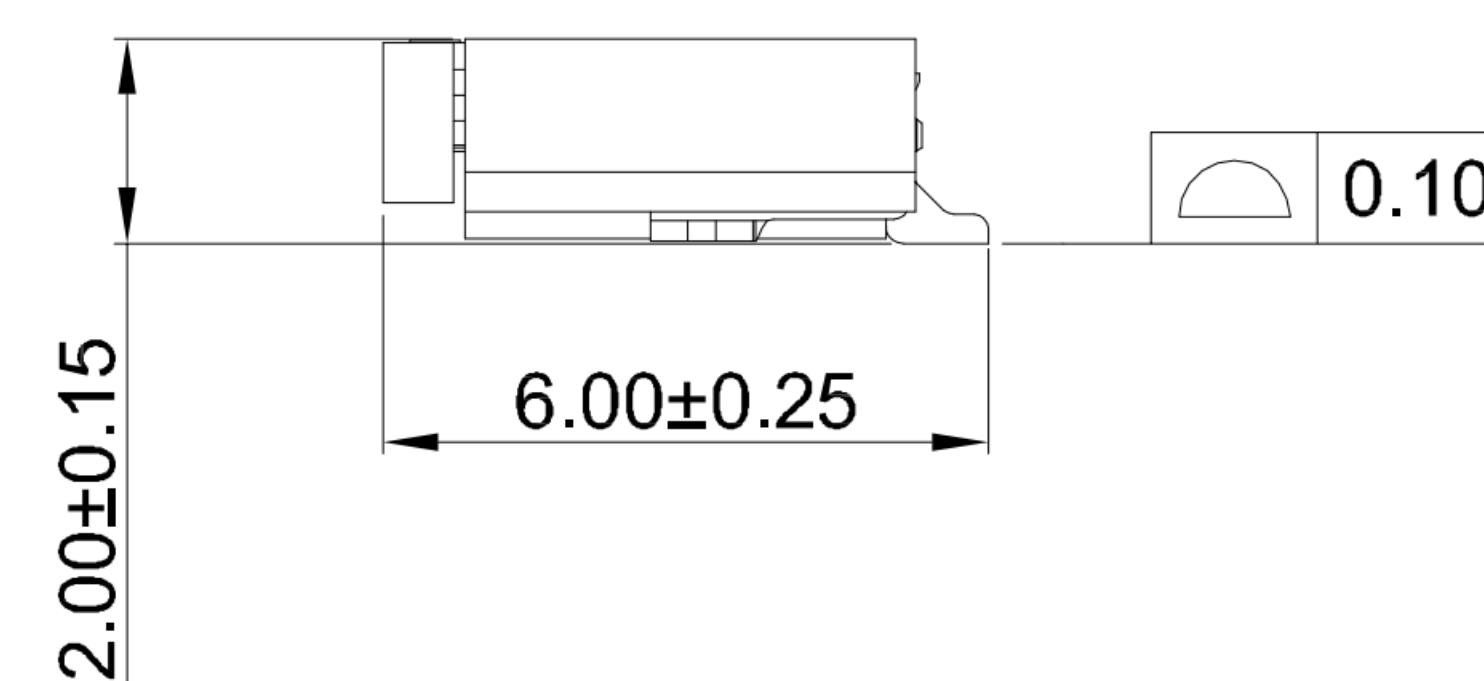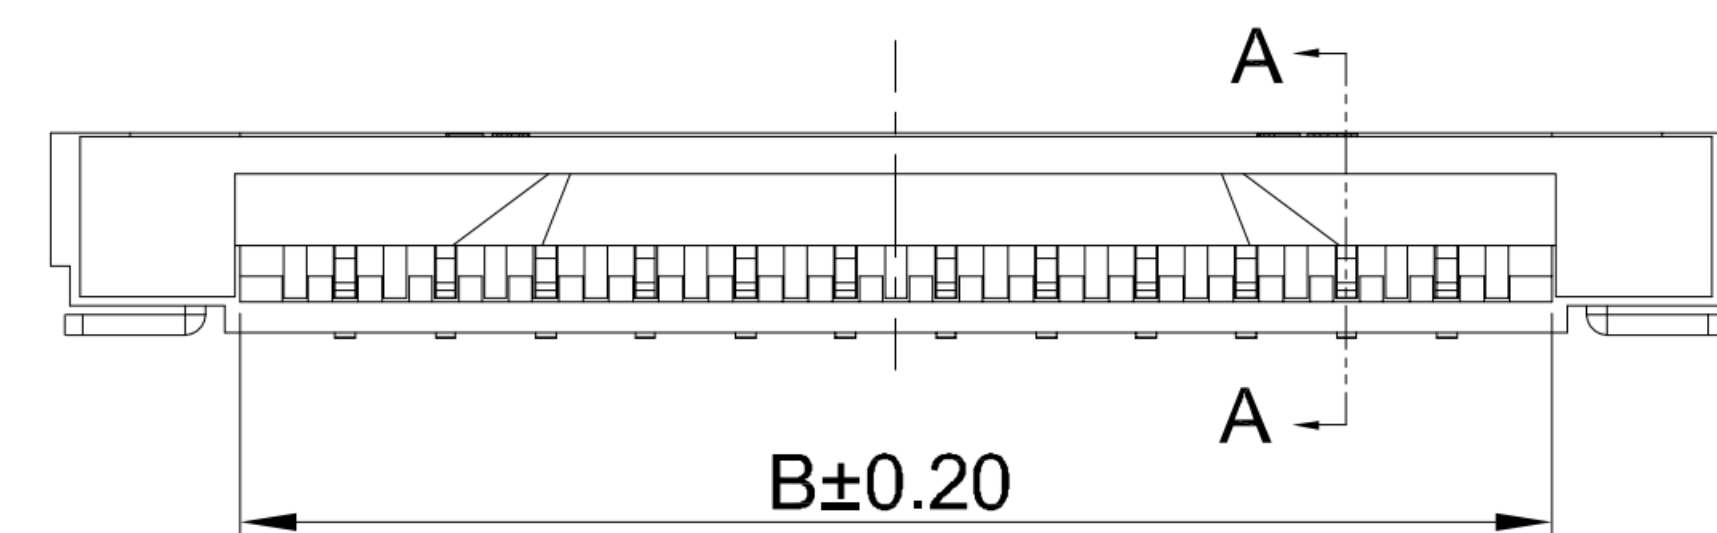


APPLICABLE FPC

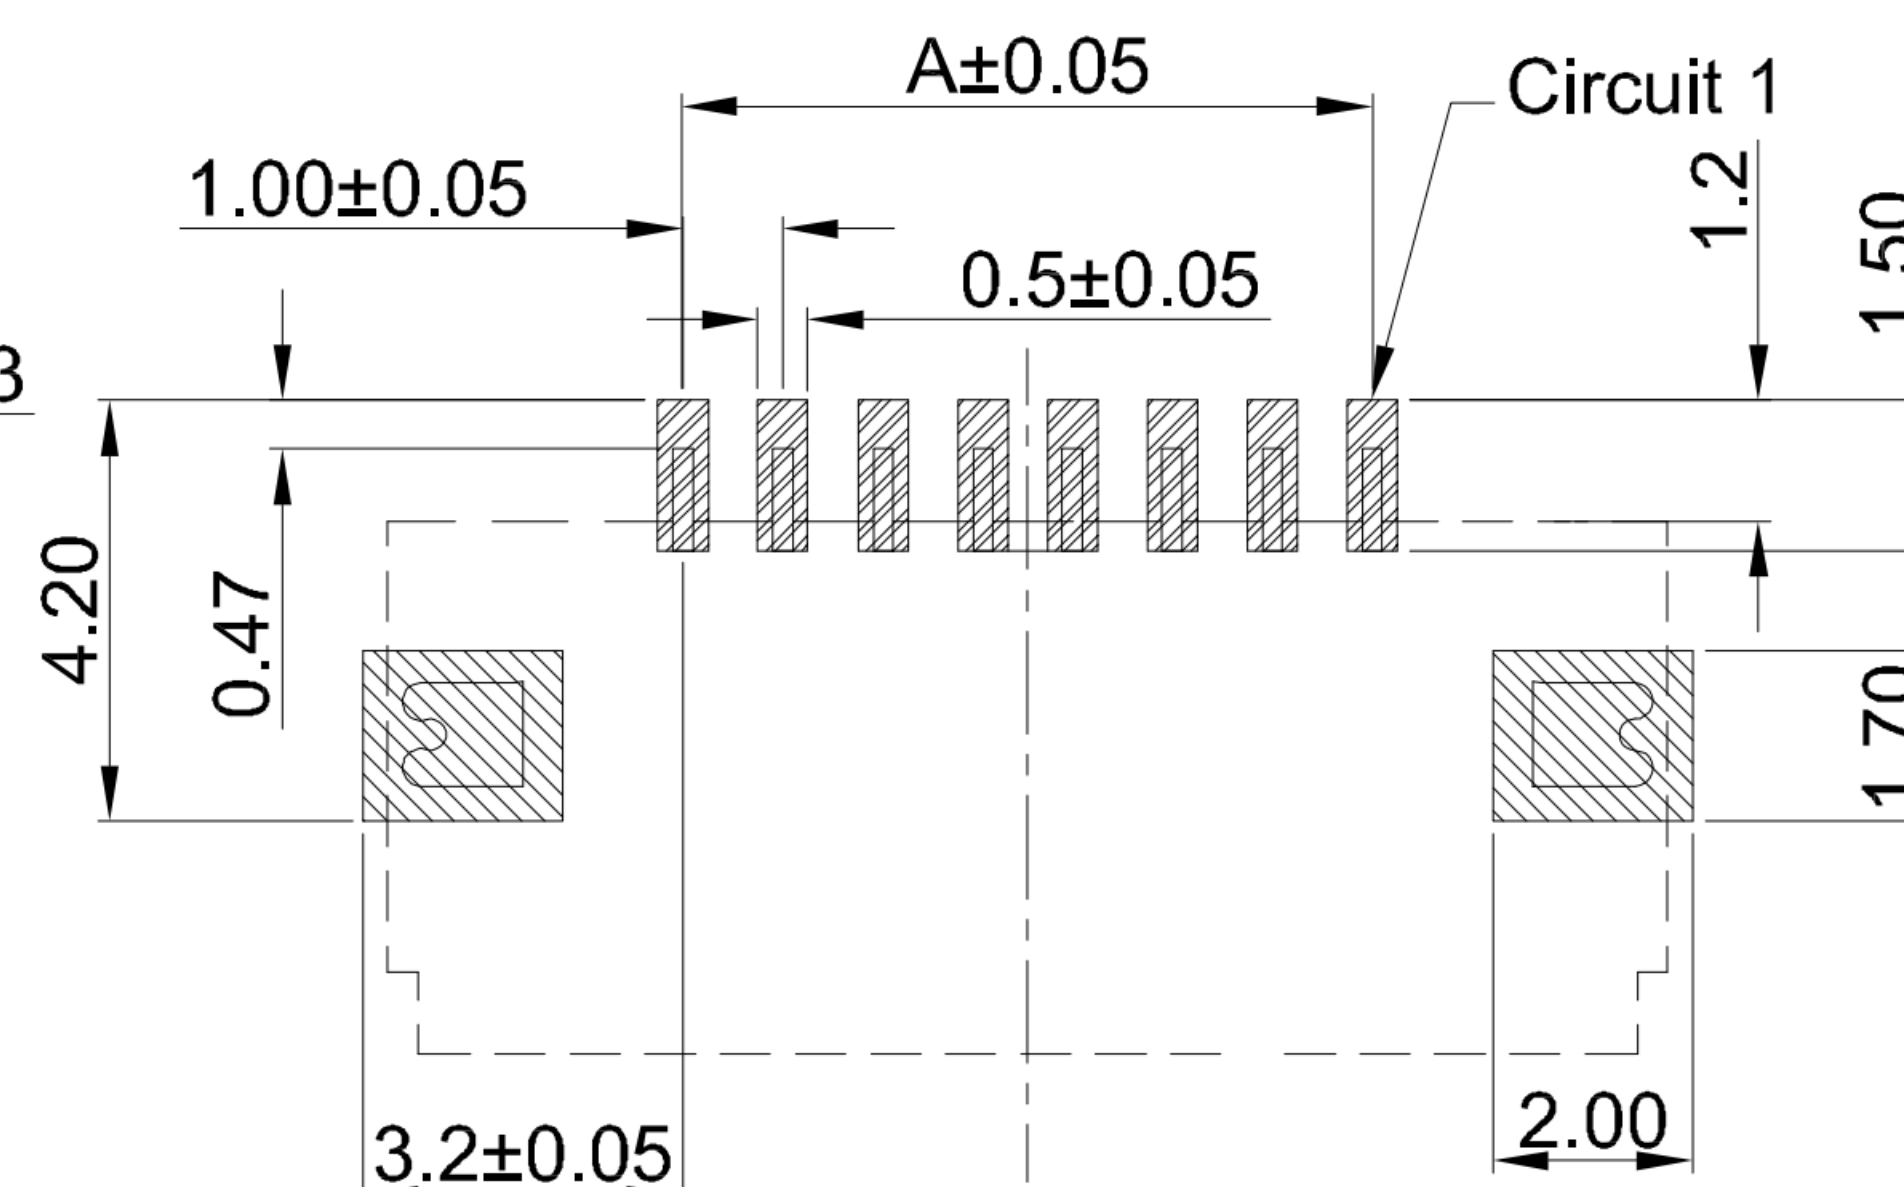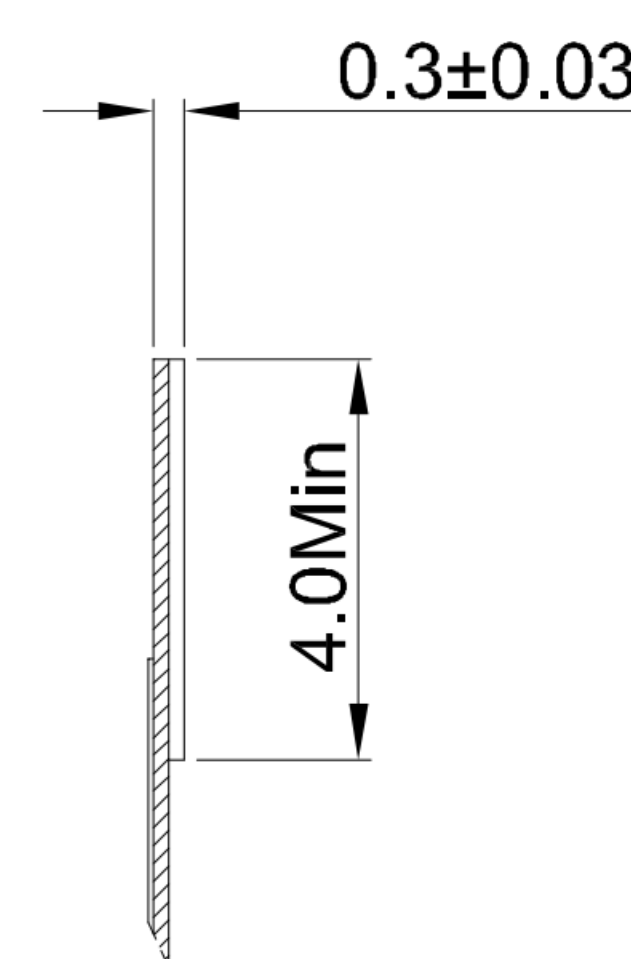

RECOMMENDED PCB LAYOUT
TOLERANCE:±0.05

4	SOLDER TABS	PHOSPHOR BRONZE	MATTE Tin
3	CONTACT	PHOSPHOR BRONZE	MATTE Tin Or Gold-Flash On Contact Area
2	COVER	LCP,94V-0	BLACK
1	HOUSING	LCP,94V-0	NATURE
NO.	PART NAME	MATERIAL	REMARK



SCALE: 1:1

UNIT: mm

SIZE:

Unless otherwise
General Tolerance:

X	±0.40
X.x	±0.30
X.xx	±0.20
X°	±5°
X.x°	±3°

Title: FPC 1.00mm Pitch 90° H2.0mm
SMT Type Connector

Molde Code: GT-F1008SR20-XXXXX01

DRAWN

CHECKE

APPROVED

DATE _____

品赞科技
b-Switch
www.dg-switch.com

REV: A0

SHEET: 1/1