


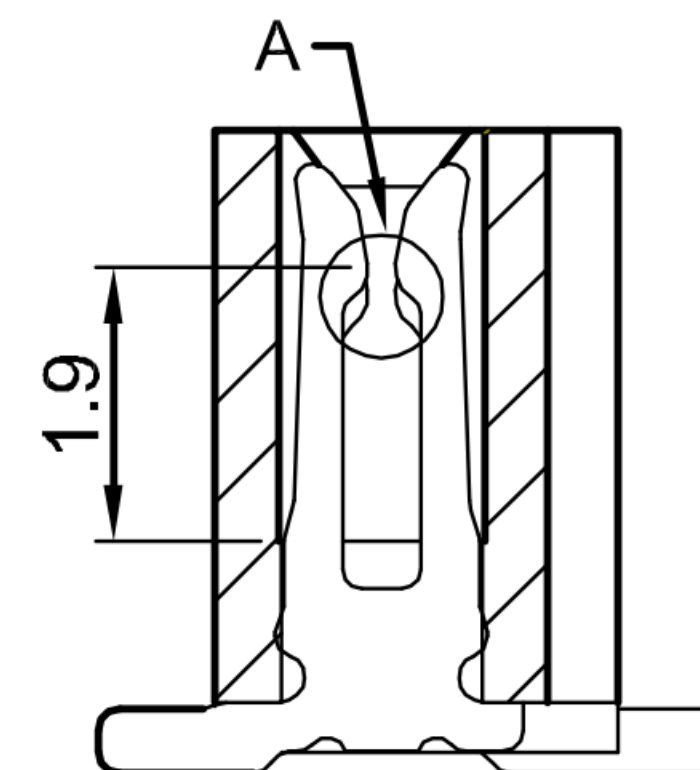


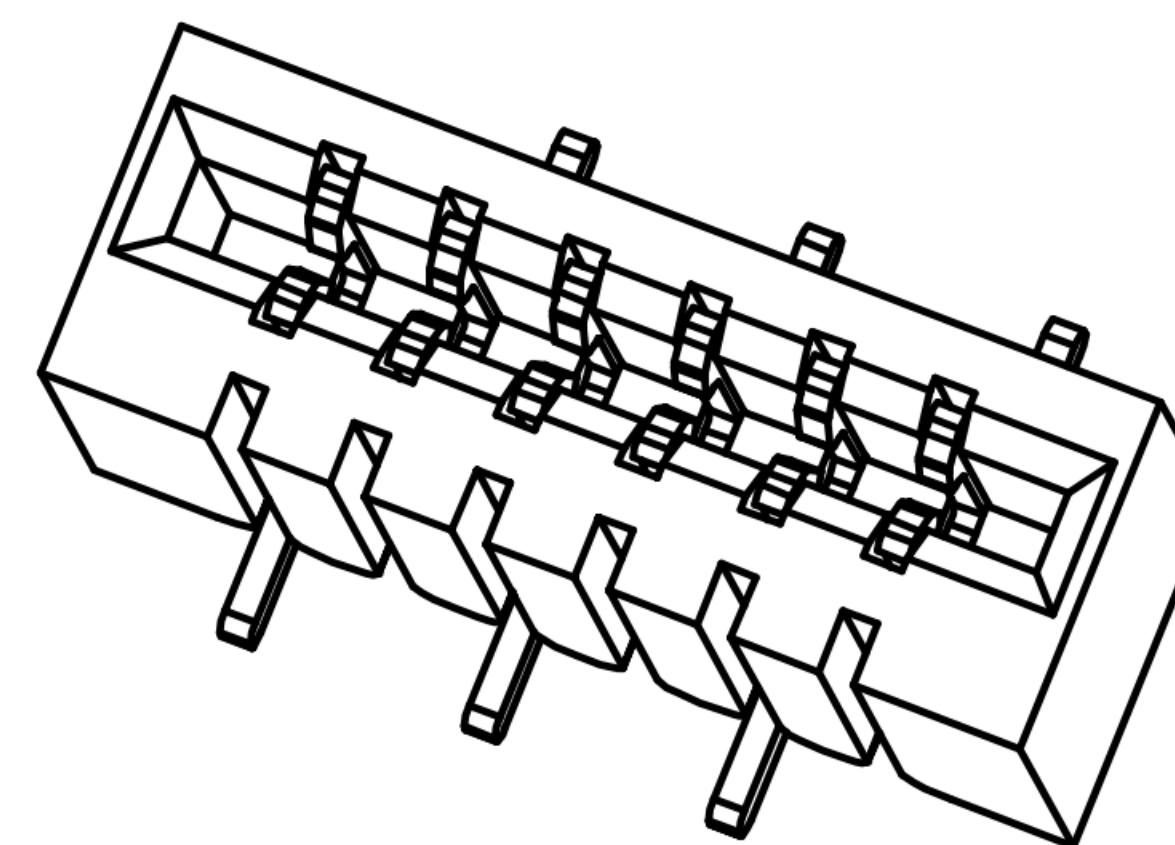

SECTION A-A

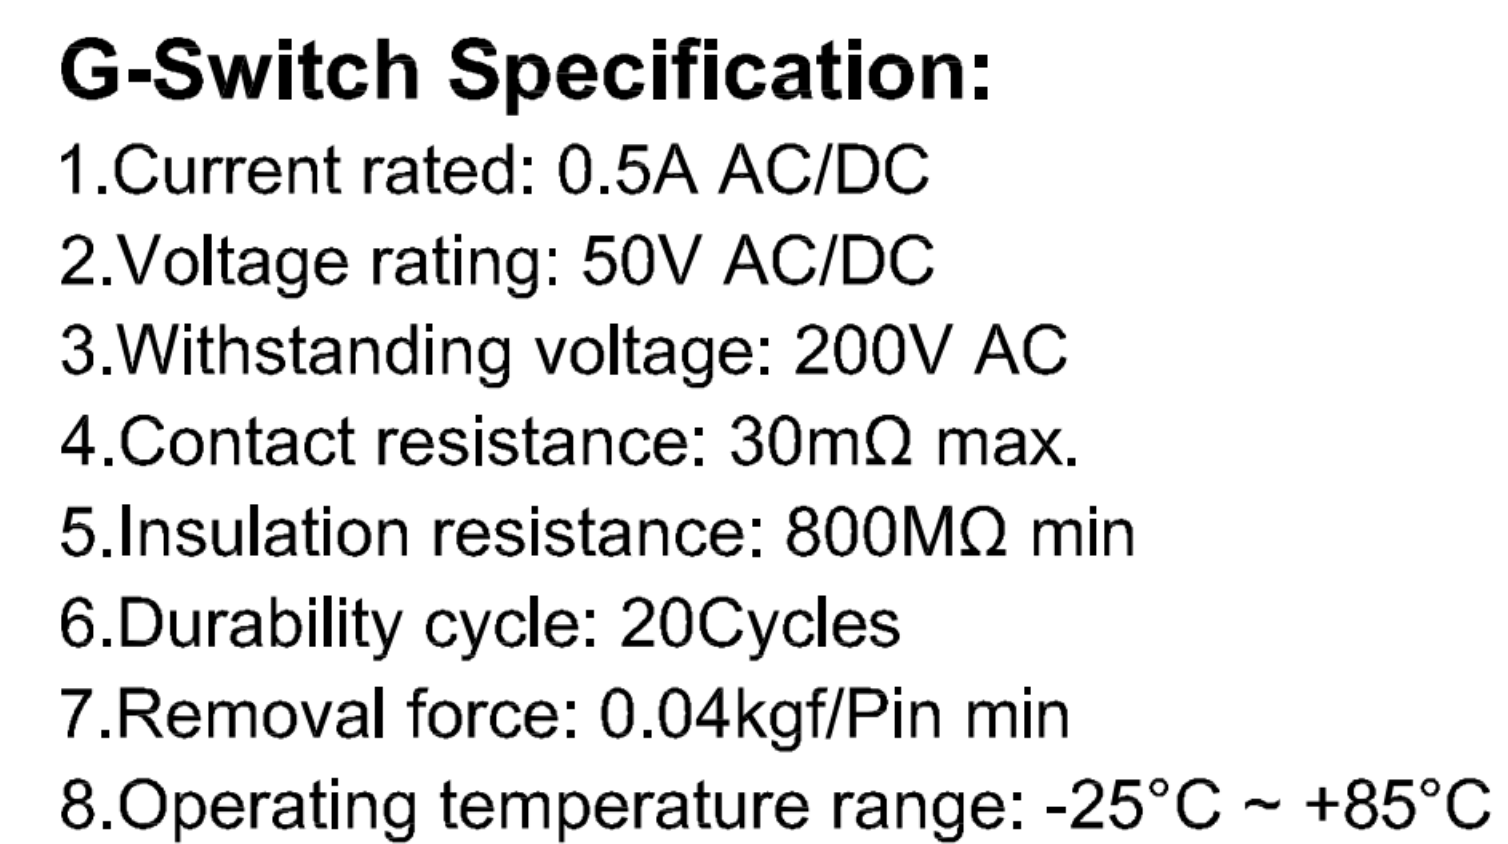

SECTION B-B

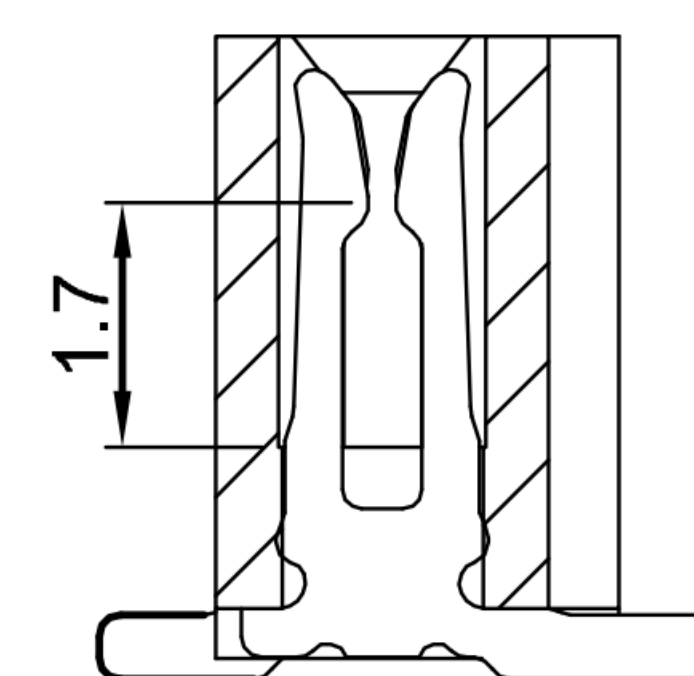

GT-F1009 S V 44 -XX X XX 01

G-Switch

Series No-

Termipoint:
S-SMT

Angle
V-180°




Terminal Plating

BT-Bright Tin


— **Housing Colour**
S-Nature
B-Black

— Pin Q' PY
04~34

— **Height**
44-4.40mm

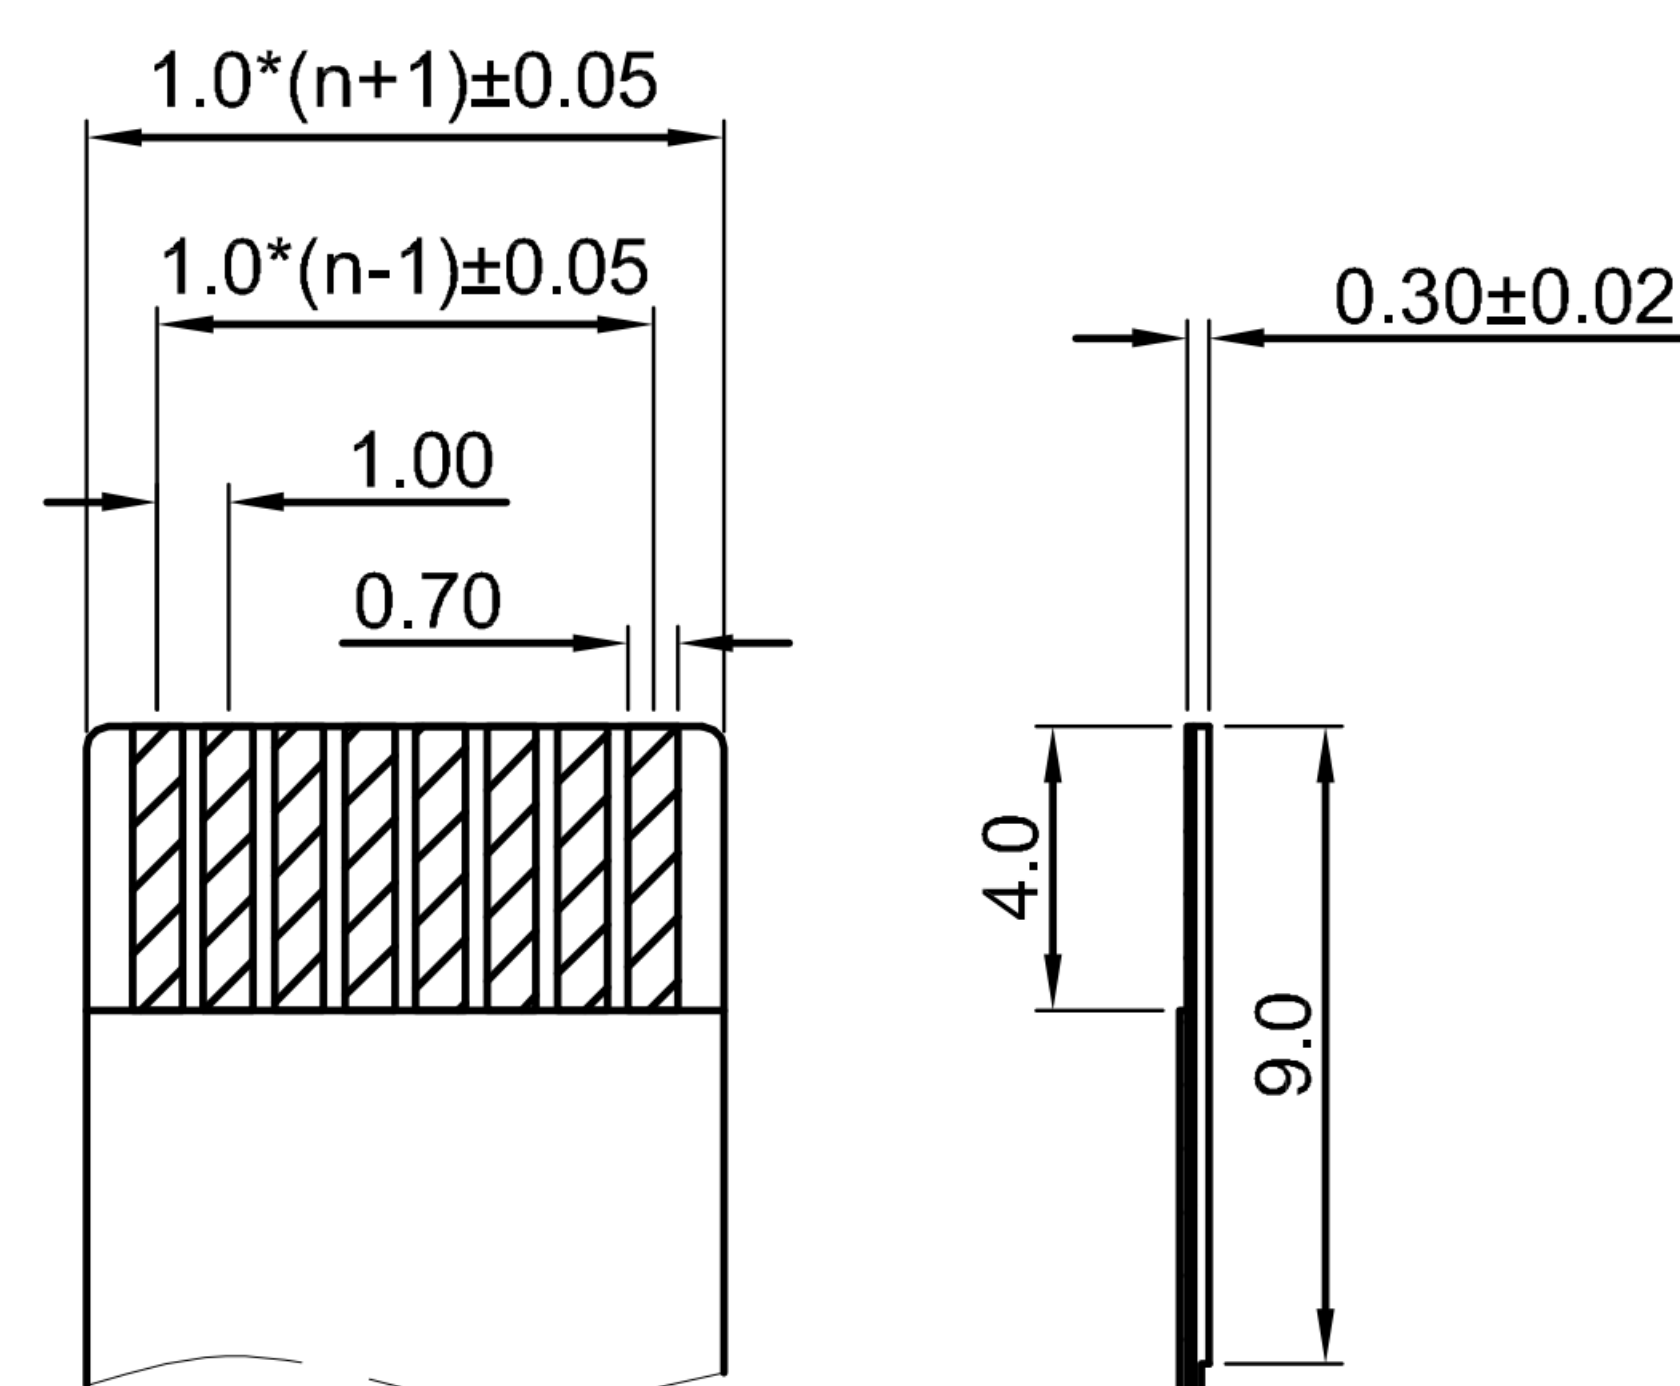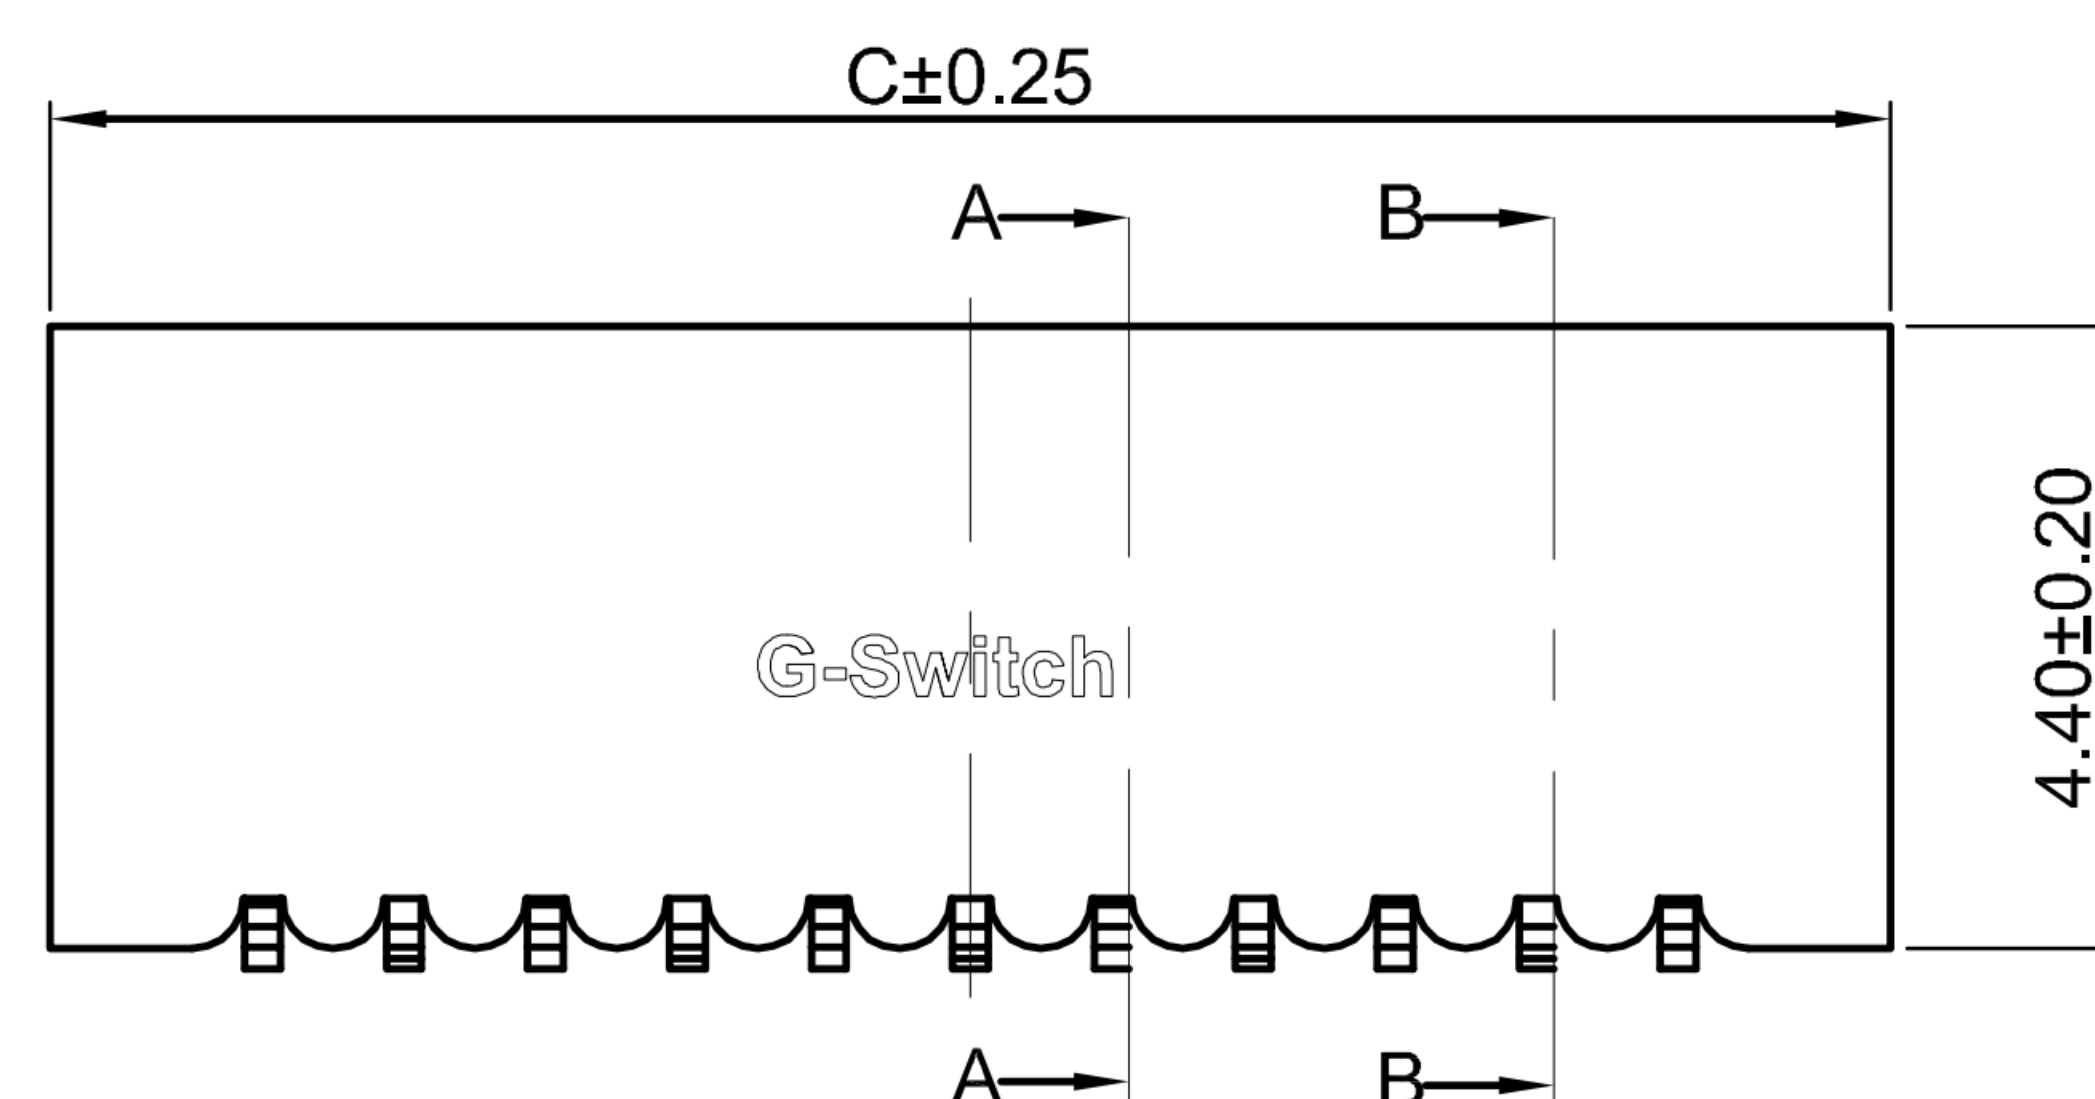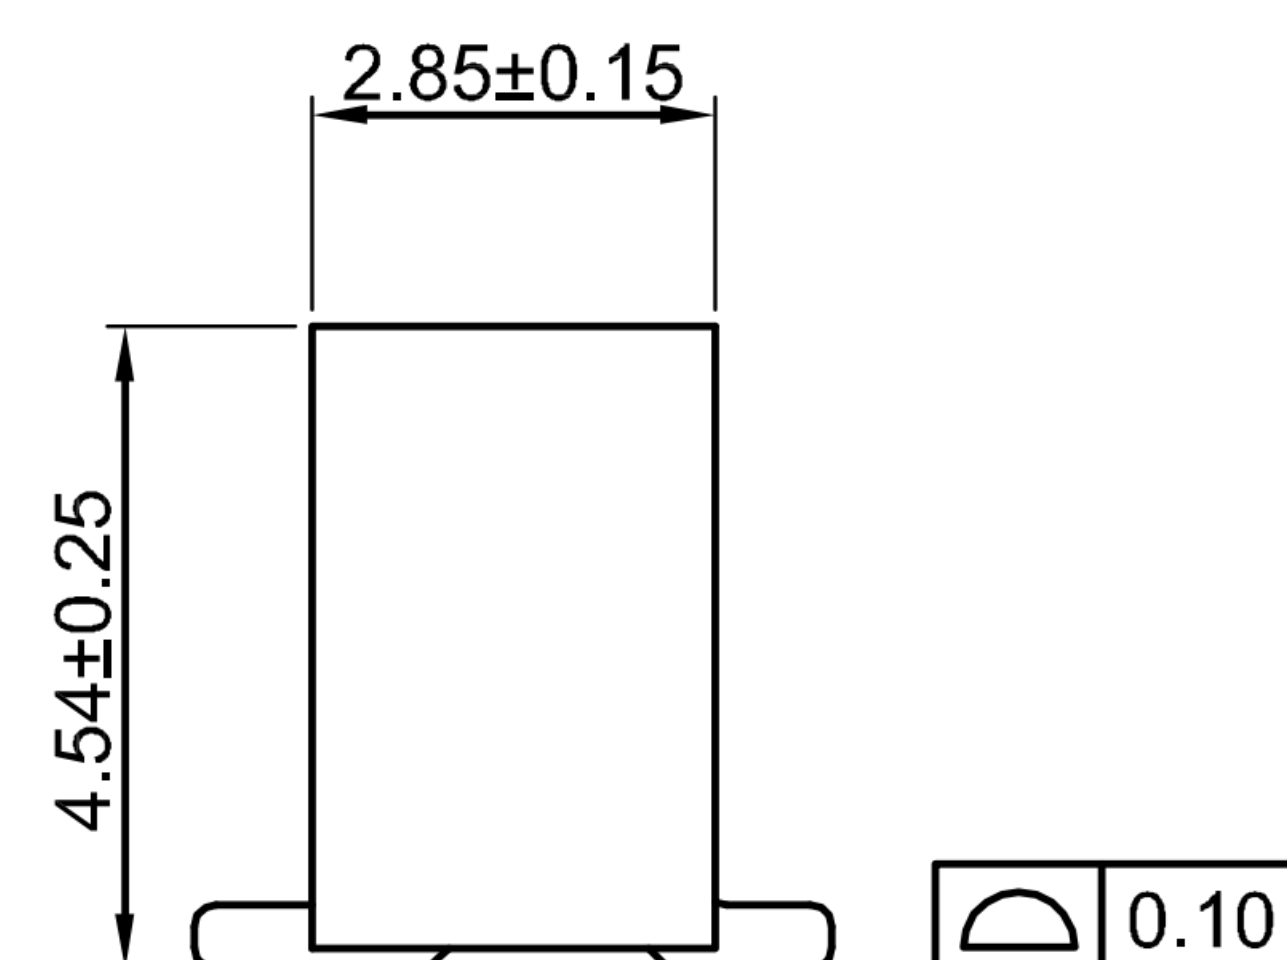

PROPER CABLE (SCALE 2:1)

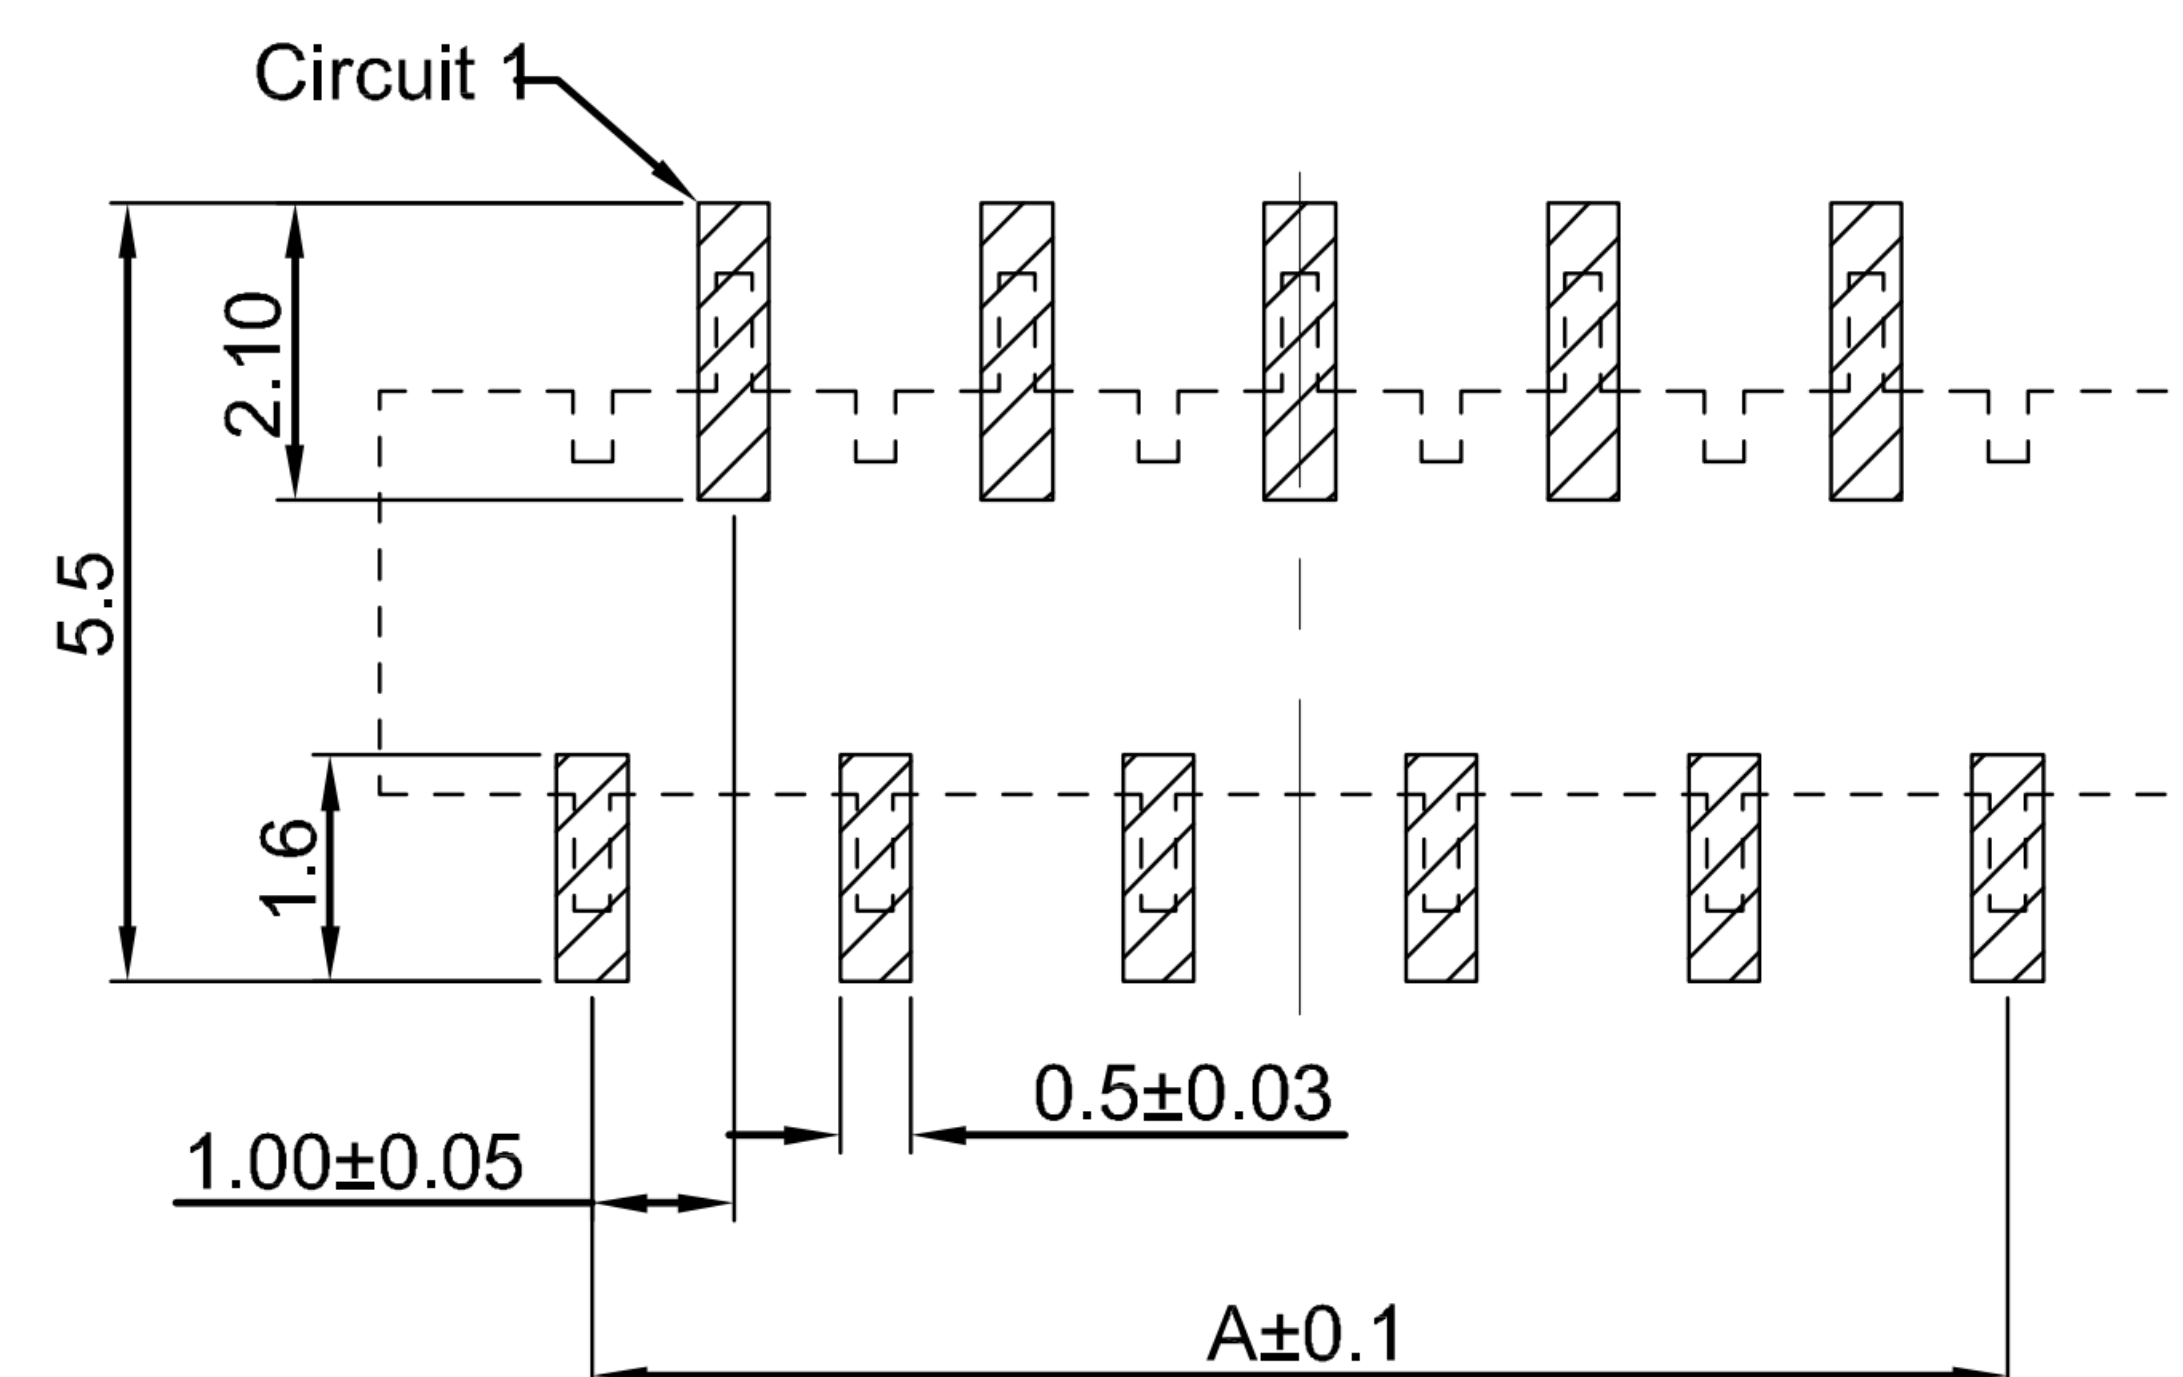

RECOMMENDED PCB LAYOUT
TOLERANCE:±0.05

Ordering Information:

Circuit	Dimensions(mm)		
	A	B	C
04	3.00	5.10	6.00
05	4.00	6.10	7.00
06	5.00	7.10	8.00
07	6.00	8.10	9.00
08	7.00	9.10	10.00
09	8.00	10.10	11.00
10	9.00	11.10	12.00
11	10.00	12.10	13.00
12	11.00	13.10	14.00
13	12.00	14.10	15.00
14	13.00	15.10	16.00
15	14.00	16.10	17.00
16	15.00	17.10	18.00
17	16.00	18.10	19.00
18	17.00	19.10	20.00
19	18.00	20.10	21.00
20	19.00	21.10	22.00
21	20.00	22.10	23.00
22	21.00	23.10	24.00
23	22.00	24.10	25.00
24	23.00	25.10	26.00
25	24.00	26.10	27.00
26	25.00	27.10	28.00
27	26.00	28.10	29.00
28	27.00	29.10	30.00
29	28.00	30.10	31.00
30	29.00	31.10	32.00
31	30.00	32.10	33.00
32	31.00	33.10	34.00
33	32.00	34.10	35.00
34	33.00	35.10	36.00
---	---	---	---

2	CONTACT	PHOSPHOR BRONZE	BRIGHT Tin
1	HOUSING	LCP,94V-0	NATURE OR BLACK
NO.	PART NAME	MATERIAL	REMARK



SCALE: 1:1

UNIT: mm

SIZE:



Title:	FPC 1.00mm Pitch 180° SMT Double Row Double Double Sided Welding
--------	---

Unless otherwise
General Tolerance:

X	±0.40
X.x	±0.30
X.xx	±0.20
X°	±5°
X.x°	±3°

Molde Code: GT-F1009SV44-XXXXX01

DRAWN

CHECKF

APPROVED

DATE _____



REV: A0

A0 SHEET: 1/1