


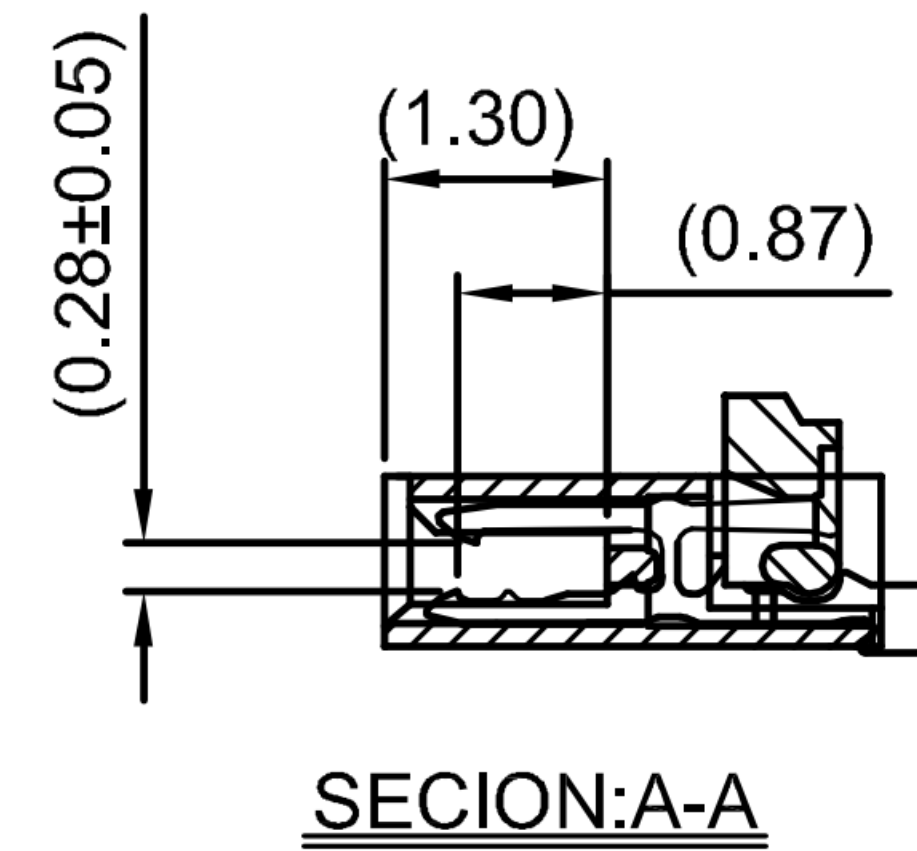


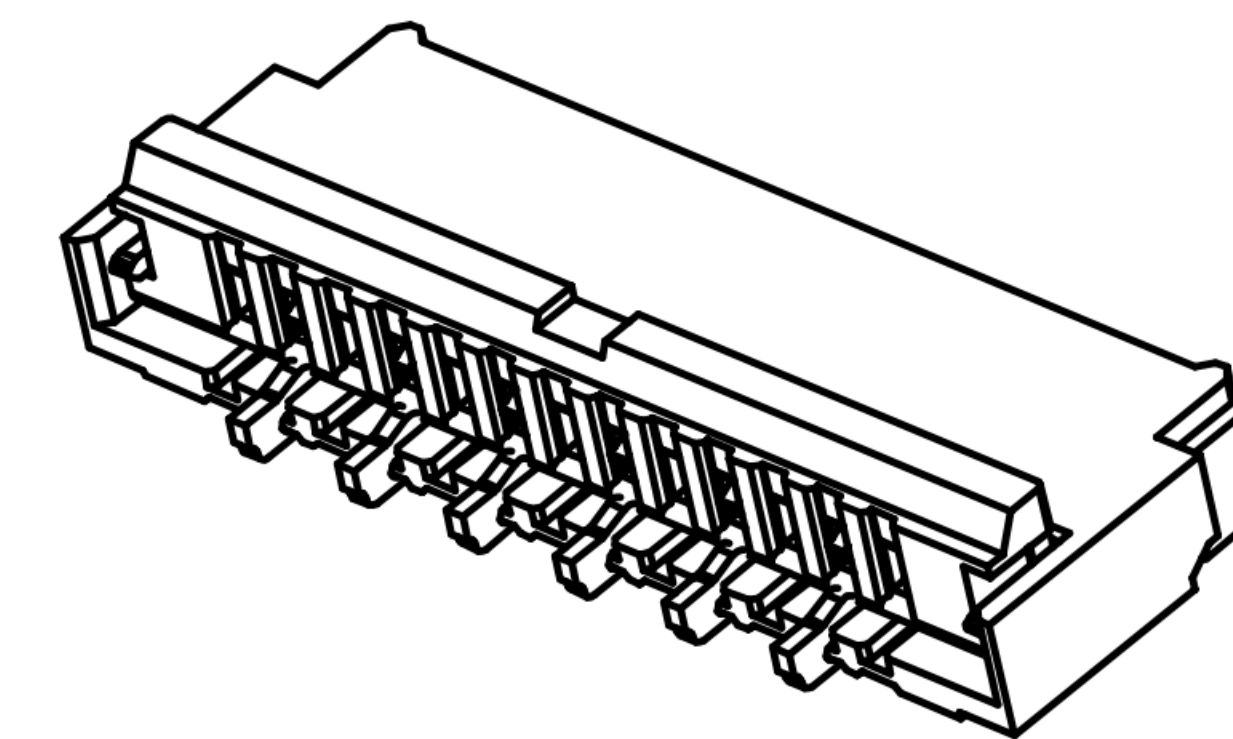

- 1.Current rated: 0.5A AC/DC
2. Voltage rating: 50V AC/DC
- 3.Withstanding voltage: 500V AC
- 4.Contact resistance: 20mΩ max.
- 5.Insulation resistance: 500MΩ min
- 6.Durability cycle: 20Cycles
- 7.Removal force:0.03kgf/Pin min
- 8.Operating temperature range: -25°C ~ +85°C

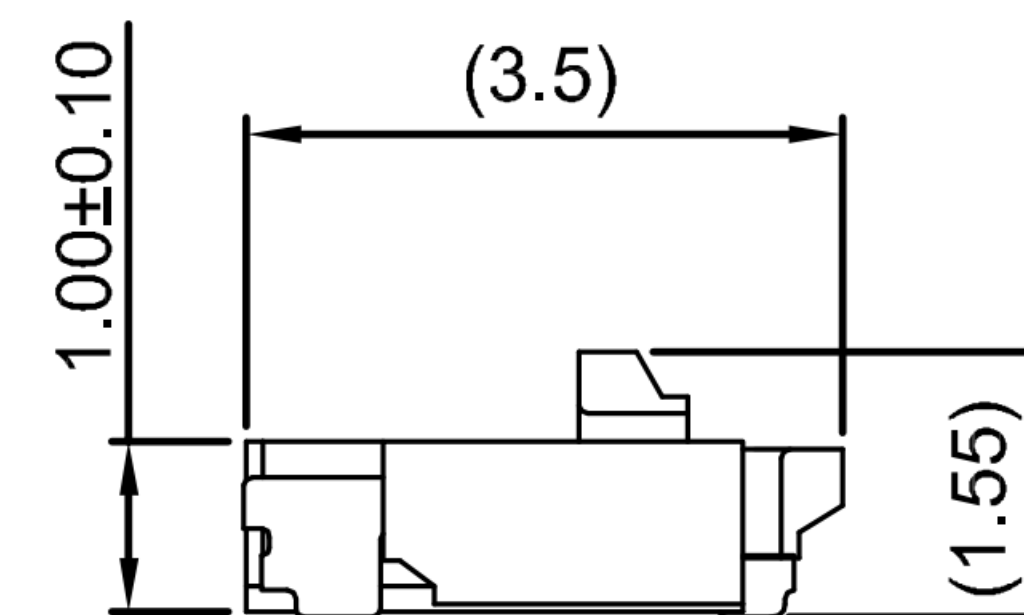

Height
10-1.0mm

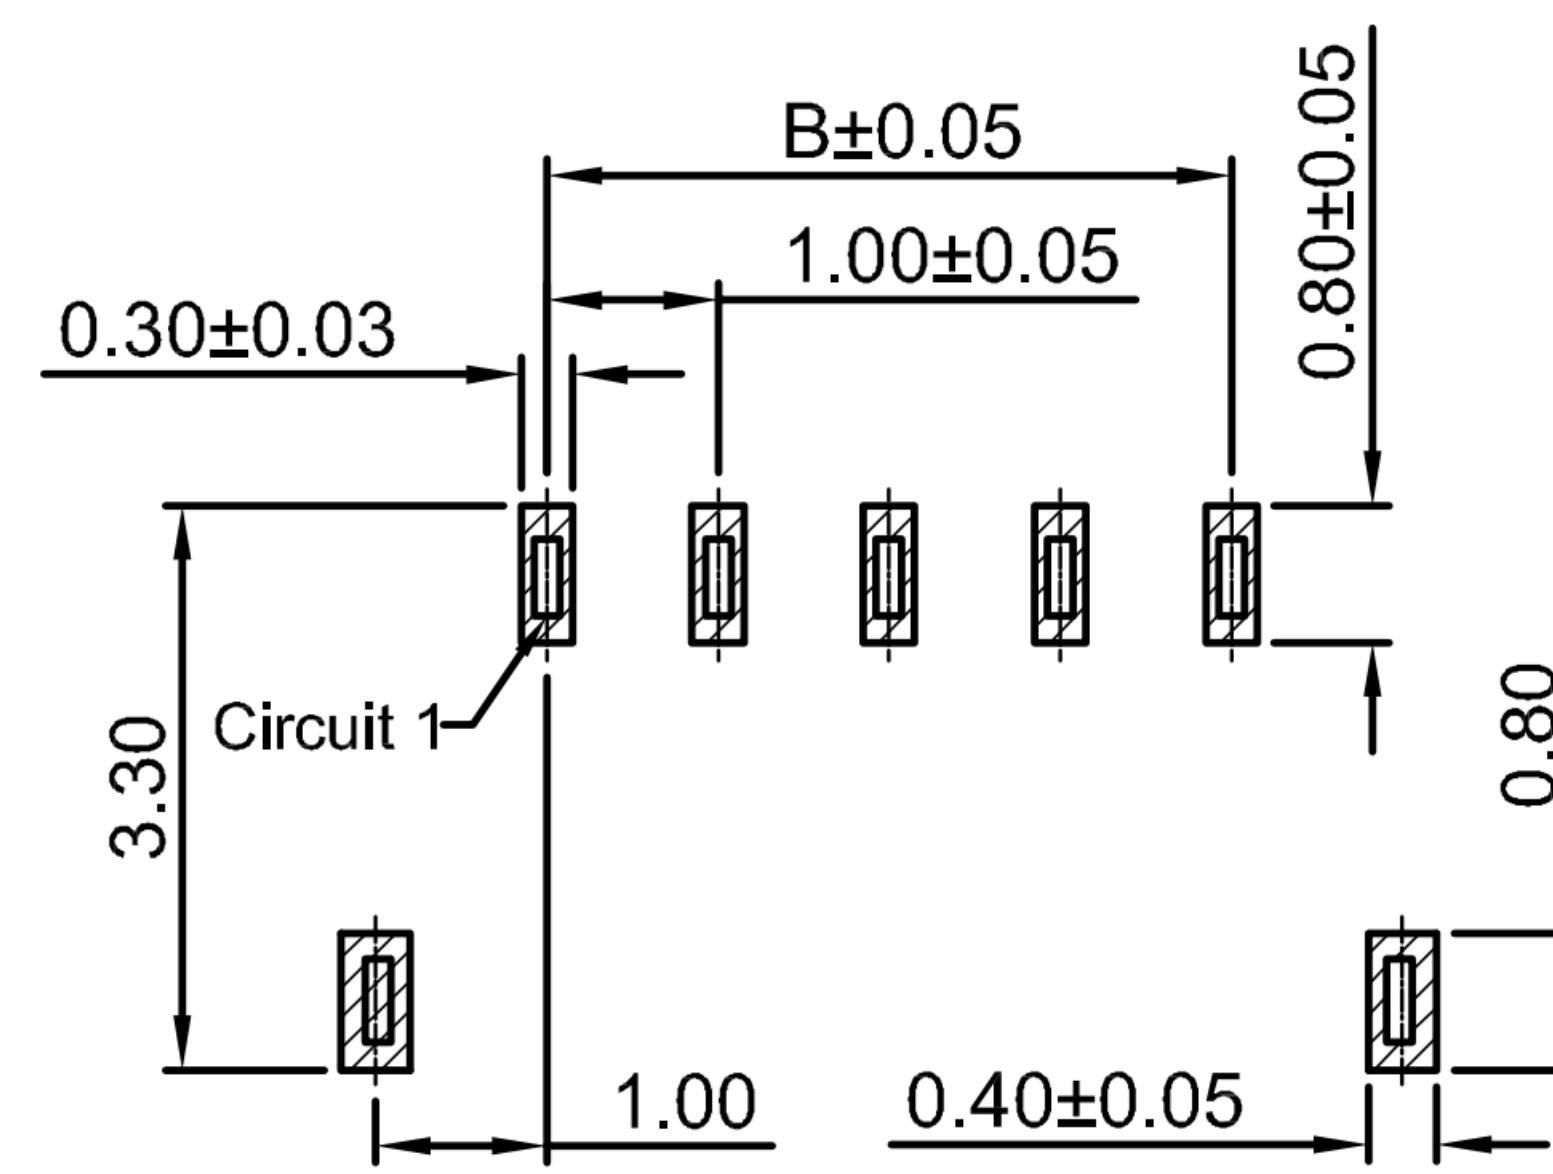

4	SOLDER TABS	BRASS	MATTE Tin
3	CONTACT	PHOSPHOR BRONZE	Gold-Flash On Contact Area
2	COVER	LCP,94V-0	BLACK
1	HOUSING	LCP,94V-0	NATURE
NO.	PART NAME	MATERIAL	REMARK



RoHS
Compliant
EU RoHS Standards



品赞科技
b-Switch®
www.dg-switch.com

SHEET: 1/1