
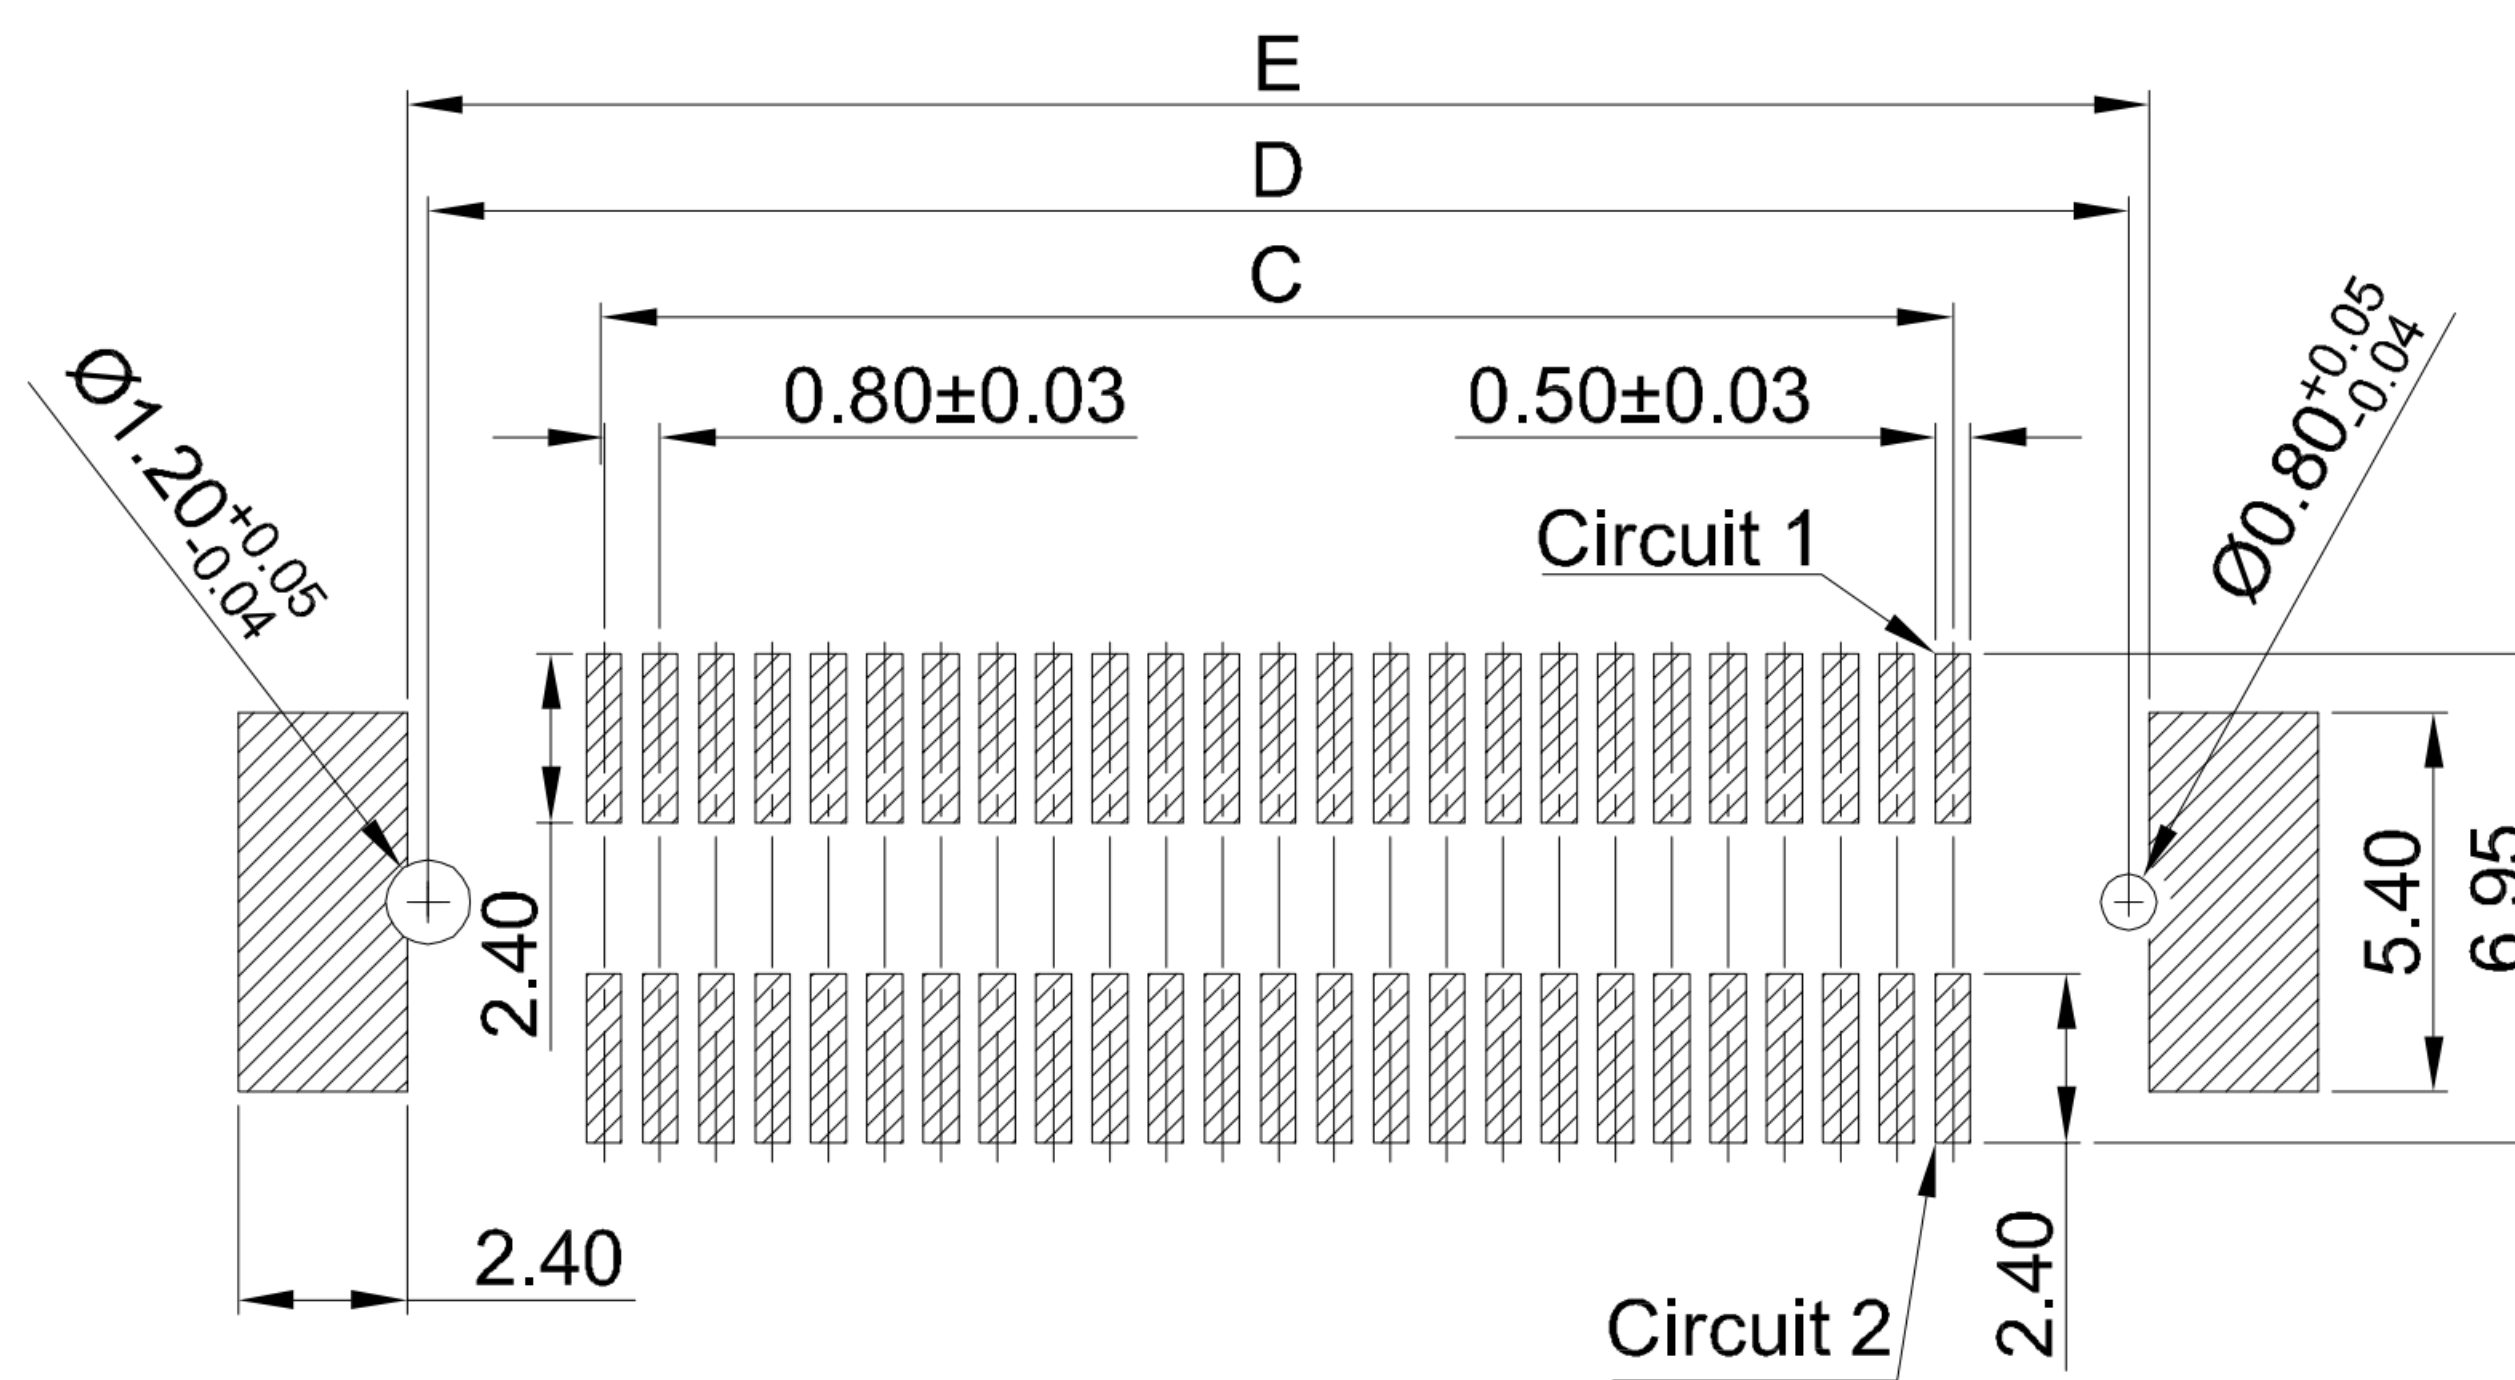


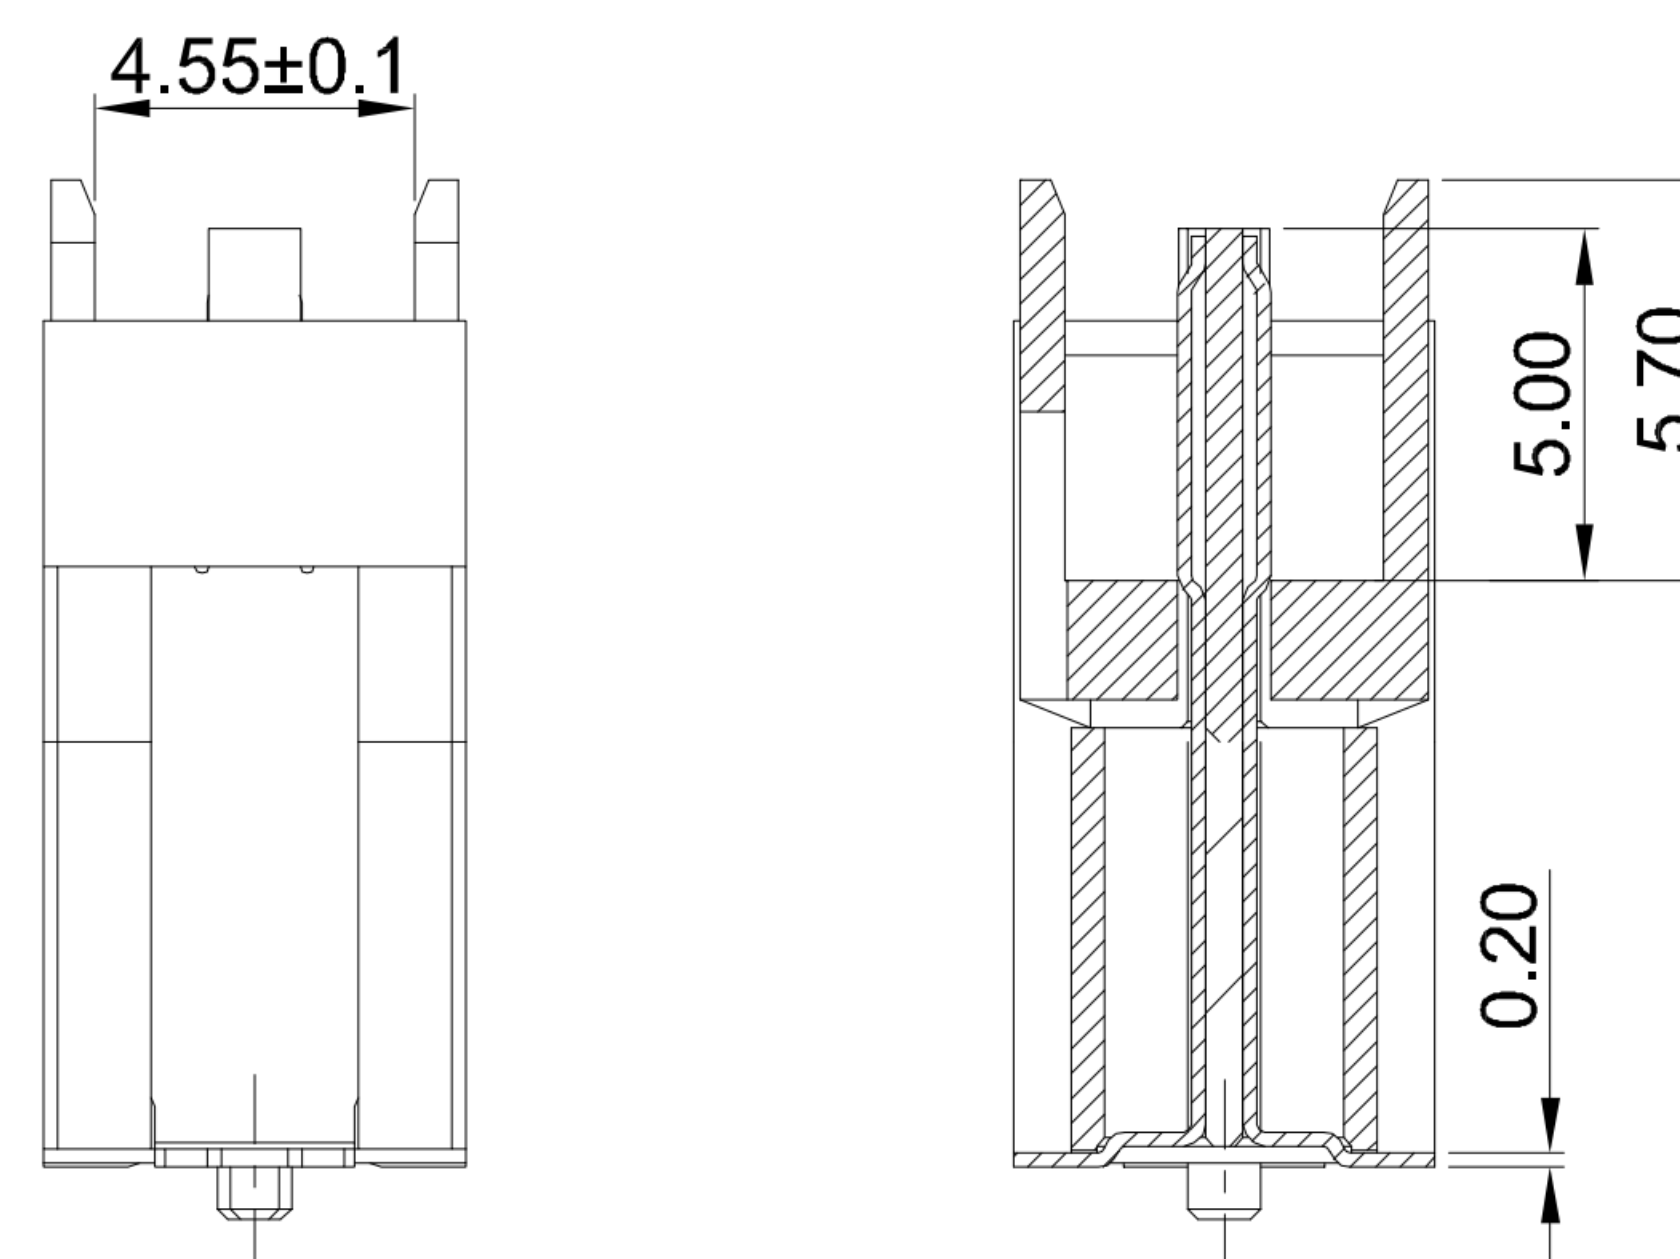

- 1.Current rated: 0.5A AC/DC
- 2.Voltage rating: 100V AC/DC
- 3.Withstanding voltage: 200V AC for 1 min
- 4.Contact resistance: 30mΩ max.
- 5.Insulation resistance: 500MΩ min
- 6.Durability cycle: 50 Cycles
- 7.Removal force: 0.015kgf/Pin min
- 8.Operating temperature range: -40°C ~ +85°C

[illegible]

3	SOLDER TABS	BRASS	MATTE TIN
2	CONTACT	PHOSPHOR BRONZE	Gold Flash on Contact Area
1	HOUSING	LCP,94V-0	BLACK
NO.	PART NAME	MATERIAL	REMARK

 品赞科技
www.dg-switch.com

REV: A0 | SHEET: 1/1