


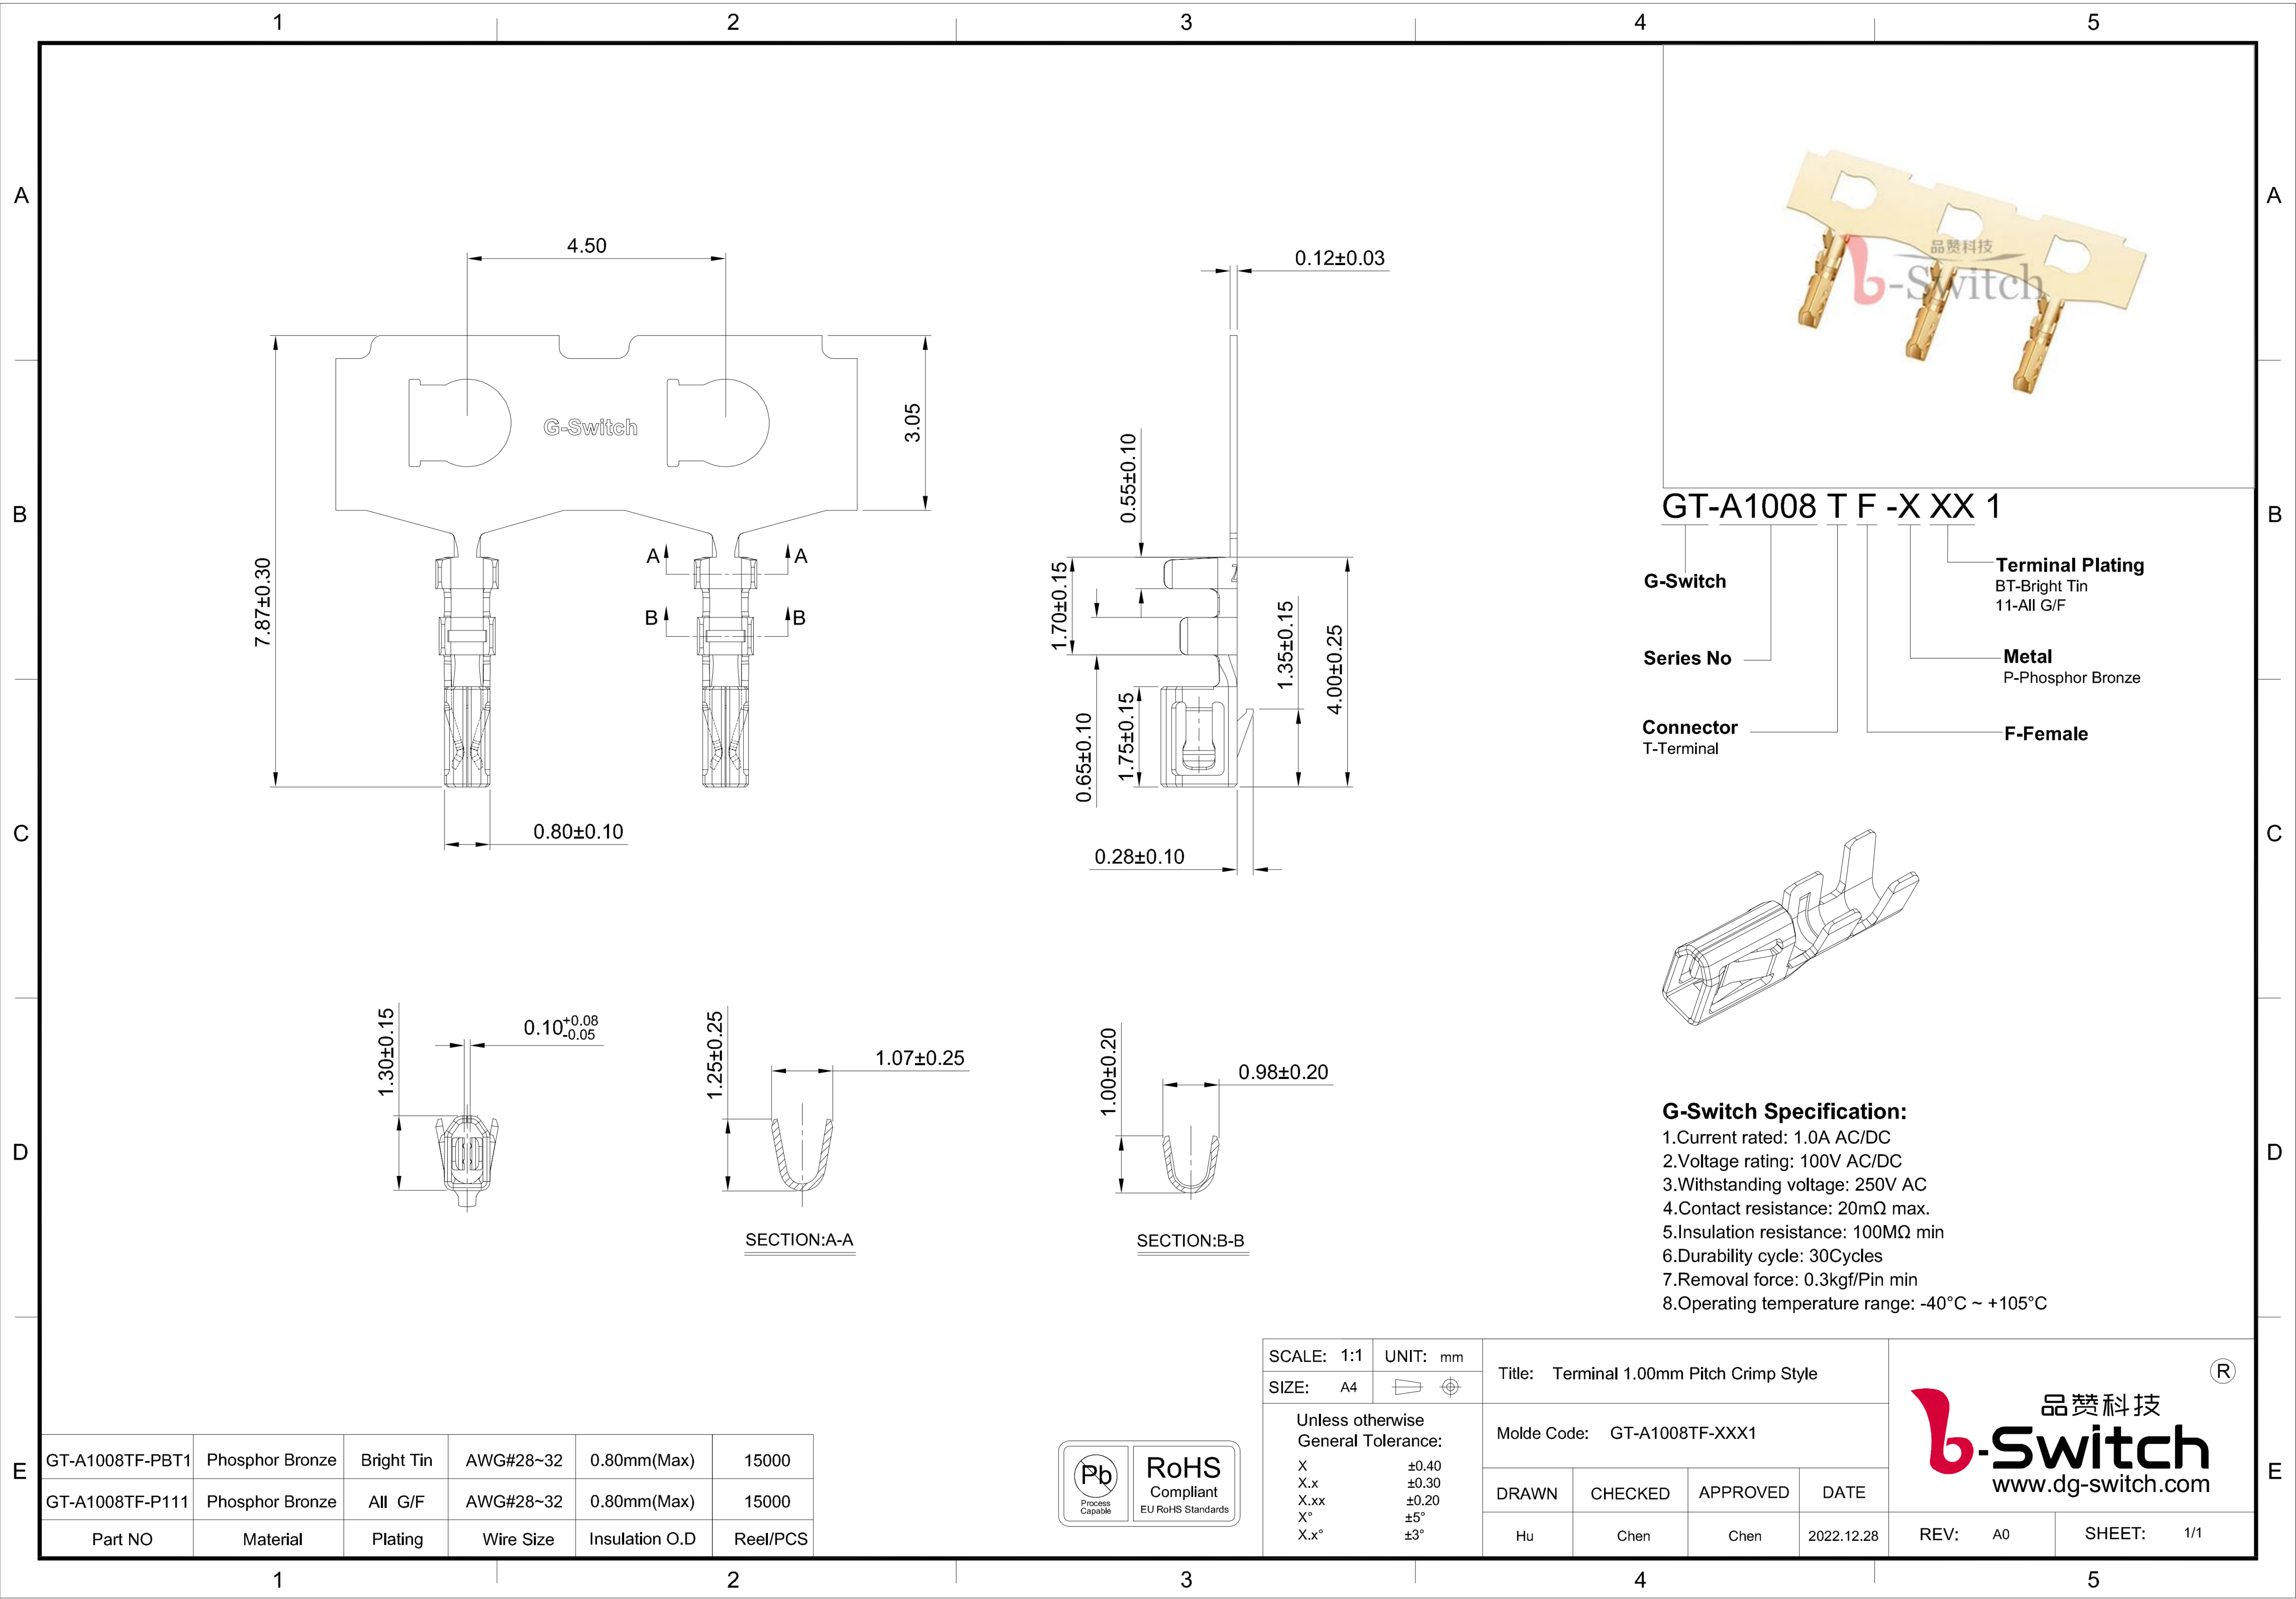

GT-A1008 T F -X XX 1

G-Switch
Series No
Connector
T-Terminal

Terminal Plating
BT-Bright Tin
11-All G/F

Metal
P-Phosphor Bronze

F-Female

G-Switch Specification:
1.Current rated: 1.0A AC/DC
2.Voltage rating: 100V AC/DC
3.Withstanding voltage: 250V AC
4.Contact resistance: 20mΩ max.
5.Insulation resistance: 100MΩ min
6.Durability cycle: 30Cycles
7.Removal force: 0.3kgf/Pin min
8.Operating temperature range: -40°C ~ +105°C

GT-A1008TF-PBT1	Phosphor Bronze	Bright Tin	AWG#28~32	0.80mm(Max)	15000
GT-A1008TF-P111	Phosphor Bronze	All G/F	AWG#28~32	0.80mm(Max)	15000
Part NO	Material	Plating	Wire Size	Insulation O.D	Reel/PCS



SCALE: 1:1	UNIT: mm	Title: Terminal 1.00mm Pitch Crimp Style			
SIZE: A4		Molde Code: GT-A1008TF-XXX1			
Unless otherwise General Tolerance:		DRAWN	CHECKED	APPROVED	DATE
X ±0.40		Hu	Chen	Chen	2022.12.28
X.x ±0.30		REV: A0			
X.xx ±0.20		SHEET: 1/1			
X° ±5°					
X.x° ±3°					

