

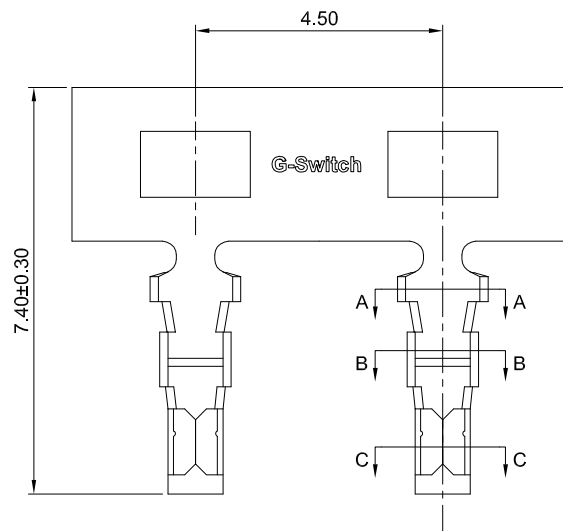




SECTION:A-A



SECTION:B-B



SECTION:C-C

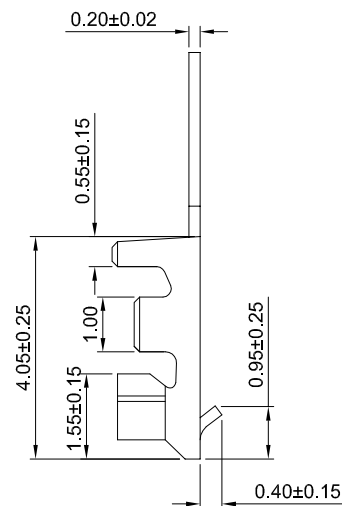

GT-A1501 T F -X XX 1

G-Switch

Series No

Connector
T-Terminal

Terminal Plating
BT-Bright Tin

Metal
P-Phosphor bronze

F-Female

G-Switch Specification:

- 1.Current rated: 1.0A AC/DC
- 2.Voltage rating: 50V AC/DC
- 3.Withstanding voltage: 500V AC
- 4.Contact resistance: 20mΩ max.
- 5.Insulation resistance: 500MΩ min
- 6.Durability cycle: 50Cycles
- 7.Removal force: 0.6kgf/Pin min
- 8.Operating temperature range: -25°C ~ +85°C

GT-A1501TF-PBT1	Phosphor bronze	Bright Tin	AWG#26~30	1.60mm(max)	20000
Part NO	Material	Plating	Wire Size	Insulation O.D	Reel/PCS

SCALE: 1:1 UNIT: mm
SIZE: A4

Unless otherwise
General Tolerance:
X ±0.40
X.x ±0.30
X.xx ±0.20
X* ±5°
X.x° ±3°

Title: Terminal 1.50mm Pitch ZH Crimp Style

Molde Code: GT-A1501TF-XXX1

DRAWN	CHECKED	APPROVED	DATE
Hu	Hu	Chen	2022.12.28

品赞科技
b-Switch
www.dg-switch.com

REV: A0 SHEET: 1/1