

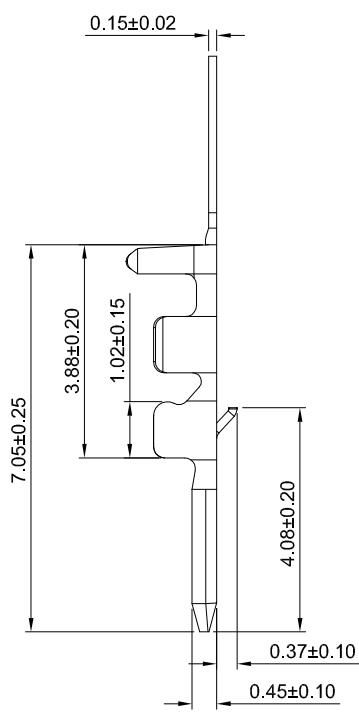
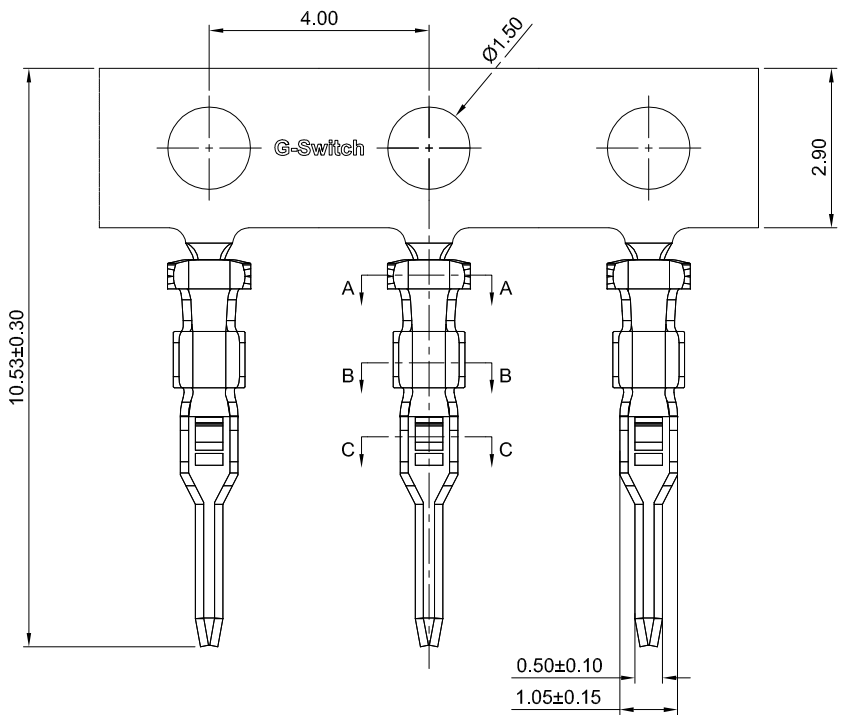


GT-A1501 T M -X XX 1


G-Switch
Series No
Connector
Terminal Plating
BT-Bright Tin
Metal
P-Phosphor bronze
M-Male
T-Terminal



SECTION:A-A



SECTION:B-B



SECTION:C-C

- G-Switch Specification:**
- 1.Current rated: 1.0A AC/DC
 - 2.Voltage rating: 50V AC/DC
 - 3.Withstanding voltage: 500V AC
 - 4.Contact resistance: 20mΩ max.
 - 5.Insulation resistance: 500MΩ min
 - 6.Durability cycle: 50Cycles
 - 7.Removal force: 0.6kgf/Pin min
 - 8.Operating temperature range: -25°C ~ +85°C

GT-A1501TM-PBT1	Phosphor bronze	Bright Tin	AWG#26~30	1.60mm(max)	20000
Part NO	Material	Plating	Wire Size	Insulation O.D	Reel/PCS



SCALE: 1:1	UNIT: mm	Title: Terminal 1.50mm Pitch ZH Crimp Style			
SIZE: A4		Molde Code: GT-A1501TM-XXX1			
Unless otherwise General Tolerance: X ±0.40 X.x ±0.30 X.xx ±0.20 X° ±5° X.x° ±3°		DRAWN	CHECKED	APPROVED	DATE
		Hu	Hu	Chen	2022.12.28



REV: A0	SHEET: 1/1
---------	------------