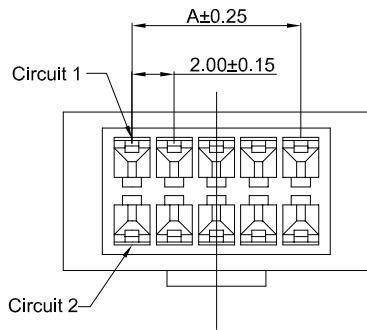


GT-A2006 H F -2 XX X 01

G-Switch

Series No

Connector
H-Housing

F-Female

Housing Colour
W-White

Pin Q' PY
04~36



Row NO
2-Dual Rows

G-Switch Specification:

- 1.Current rated: 3.0A AC/DC
- 2.Voltage rating: 250V AC/DC
- 3.Withstanding voltage: 1000V AC
- 4.Contact resistance: 30mΩ max.
- 5.Insulation resistance: 1000MΩ min
- 6.Durability cycle: 50Cycles
- 7.Removal force: 1.50kgf/Pin min
- 8.Operating temperature range: -25°C ~ +85°C

Ordering Information:

Circuit	Dimensions(mm)			Circuit	Dimensions(mm)		
	A	B	C		A	B	C
04	---	8.60	4.85	22	20.00	26.60	22.85
06	4.00	10.60	6.85	24	22.00	28.60	24.85
08	6.00	12.60	8.85	26	24.00	30.60	26.85
10	8.00	14.60	10.85	28	26.00	32.60	28.85
12	10.00	16.60	12.85	30	28.00	34.60	30.85
14	12.00	18.60	14.85	32	30.00	36.60	32.85
16	14.00	20.60	16.85	34	32.00	38.60	34.85
18	16.00	22.60	18.85	36	34.00	40.60	36.85
20	18.00	24.60	20.85	---	---	---	---

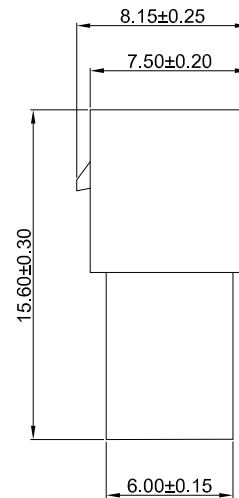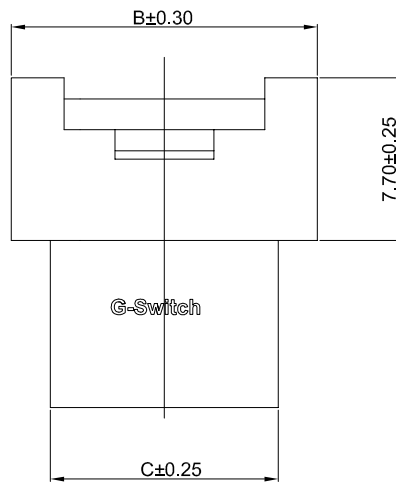

1	HOUSING	PA66,94V-0	WHITE
NO.	PART NAME	MATERIAL	REMARK



SCALE: 1:1 UNIT: mm
SIZE: A4

Unless otherwise
General Tolerance:
X ±0.40
X.x ±0.30
X.xx ±0.20
X* ±5°
X.x° ±3°

Title: Housing 2.00mm Pitch PHB
Dual Rows Female

Molde Code: GT-A2006HF-2XXX01

DRAWN	CHECKED	APPROVED	DATE
Hu	Chen	Chen	2021.10.20



REV: A0 SHEET: 1/1