
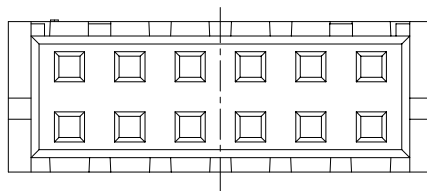
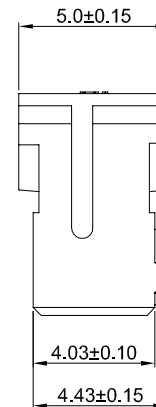


– **Row NO**
2-Dual Rows

- 1.Current rated: 3.0A AC/DC
- 2.Voltage rating: 250V AC/DC
- 3.Withstanding voltage: 800V AC
- 4.Contact resistance: 10mΩ max.
- 5.Insulation resistance: 1000MΩ min
- 6.Durability cycle: 50Cycles
- 7.Removal force: 1.50kgf/Pin min
- 8.Operating temperature range: -25°C ~ +85°C

Circuit	Dimensions(mm)		Circuit	Dimensions(mm)	
	A	B		A	B
04	--	6.00	24	22.00	26.00
06	4.00	8.00	26	24.00	28.00
08	6.00	10.00	28	26.00	30.00
10	8.00	12.00	30	28.00	32.00
12	10.00	14.00	32	30.00	34.00
14	12.00	16.00	34	32.00	36.00
16	14.00	18.00	36	34.00	38.00
18	16.00	20.00	38	36.00	40.00
20	18.00	22.00	40	38.00	42.00
22	20.00	24.00	--	--	--

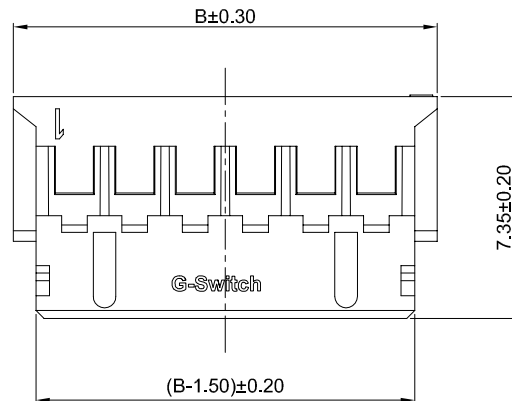

1	HOUSING	PA66,94V-0	WHITE
NO.	PART NAME	MATERIAL	REMARK



RoHS
Compliant
EU RoHS Standards



SCALE: 1:1	UNIT: mm
SIZE: A4	

Unless otherwise	
General Tolerance:	
X	±0.40
X.x	±0.30
X.xx	±0.20
X°	±5°
X.x°	±3°

Title: Housing 2.00mm Pitch PHD Dual Rows Male

Molde Code: GT-A2009HM-2XXX01

DRAWN	CHECKED	APPROVED	DATE
Hu	Chen	Chen	2021.10.20



REV: A0	SHEET: 1/1
---------	------------