
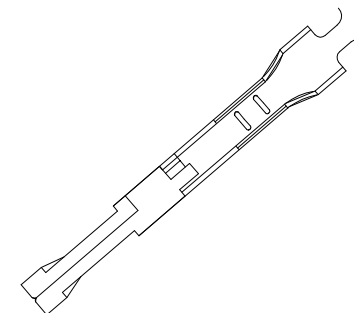
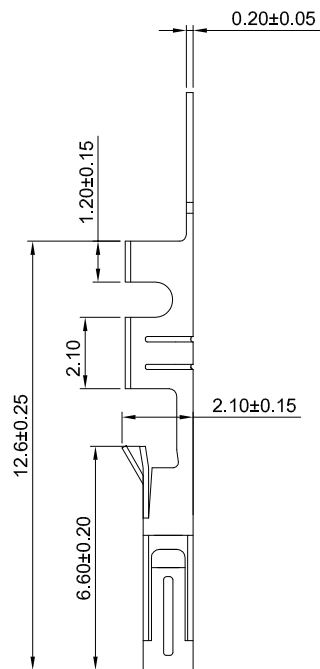


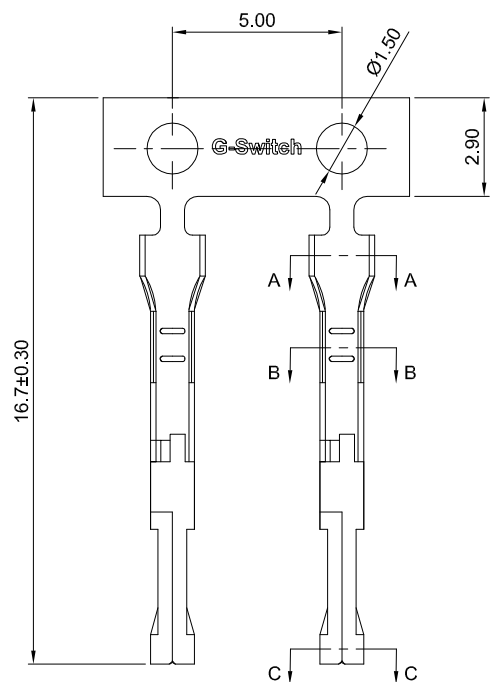

GT-A2547 T F -X XX 1

G-Switch


Series No

Connector
T-Terminal


Terminal Plating
BT-Bright Tin
01-G/F

Metal
P-Phosphor Bronze


F-Female



SECTION:A-A



SECTION:B-B



SECTION:C-C

G-Switch Specification:

- 1.Current rated: 3.0A AC/DC
- 2.Voltage rating: 250V AC/DC
- 3.Withstanding voltage: 1500V AC
- 4.Contact resistance: 20mΩ max.
- 5.Insulation resistance: 1000MΩ min
- 6.Durability cycle: 50Cycles
- 7.Removal force: 1.5kgf/Pin min
- 8.Operating temperature range: -25°C ~ +85°C

GT-A2547TF-P011	Phosphor bronze	Gold-Flash On Contact Area	AWG#22~#26	1.90mm(max)	15000
GT-A2547TF-PBT1	Phosphor bronze	Bright Tin	AWG#22~#26	1.90mm(max)	15000
Part NO	Material	Plating	Wire Size	Insulation O.D	Reel/PCS



SCALE: 1:1	UNIT: mm	Title: Terminal 2.54mm Pitch Crimp Style			
SIZE: A4					
Unless otherwise General Tolerance: X ±0.40 X.x ±0.30 X.x.x ±0.20 X° ±5° X.x° ±3°		Molde Code: GT-A2547TF-XXX1			
		DRAWN	CHECKED	APPROVED	DATE
		Hu	Chen	Chen	2022.12.28



REV: A0 SHEET: 1/1