

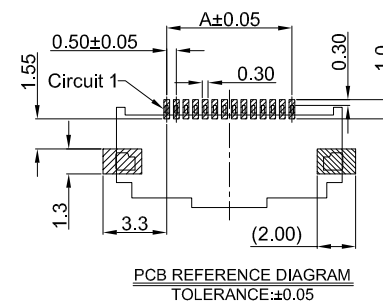




— **Height**
25-2.50mm

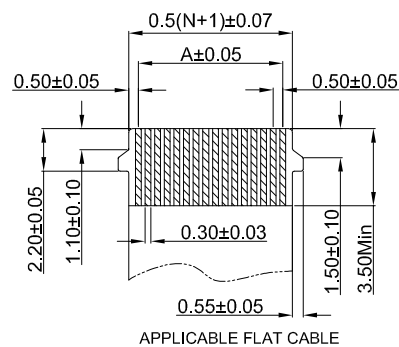

PCB REFERENCE DIAGRAM
TOLERANCE:±0.05



- 1.Current rated: 0.5A AC/DC
2. Voltage rating: 50V AC/DC
- 3.Withstanding voltage: 125V AC
- 4.Contact resistance: 35mΩ max.
- 5.Insulation resistance: 500MΩ min
- 6.Durability cycle: 20Cycles
- 7.Removal force: 0.03kgf/Pin min
- 8.Operating temperature range: -40°C ~ +85°C

Circuit	Dimensions(mm)			Circuit	Dimensions(mm)		
	A	B	C		A	B	C
10	4.50	8.10	9.70	60	29.50	33.10	34.70
11	5.00	8.60	10.20	64	31.50	35.10	36.70
24	11.50	15.10	16.70	68	33.50	37.10	38.70
40	19.50	23.10	24.70	80	39.50	43.10	44.70

SCALE: 1:1	UNIT: mm	Title: FPC 0.50mm Pitch 90° SMT With Lock H2.50mm Connector			
SIZE: A4		Molde Code: GT-F0523SR25-XXXXXX01			
Unless otherwise General Tolerance: X ±0.40 X.x ±0.30 X.xx ±0.20 X* ±5° X.x° ±3°					
		DRAWN	CHECKED	APPROVED	DATE
		Hu	Chen	Chen	2022.12.20



 品赞科技
b-Switch
www.dg-switch.com

REV: A0	SHEET: 1/1
---------	------------