




- 1.Current rated: 1.0A AC/DC
- 2.Voltage rating: 125V AC/DC
- 3.Withstanding voltage: 250V AC
- 4.Contact resistance: 20mΩ max.
- 5.Insulation resistance: 100MΩ min
- 6.Durability cycle: 50Cycles
- 7.Removal force: 0.50kgf/Pin min
- 8.Operating temperature range: -25°C ~ +85°C

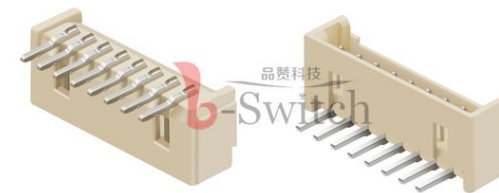



—Row NO
1-Single Row



TYPE 1



TYPE 2

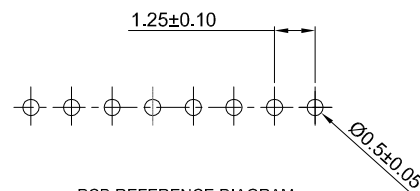

PCB REFERENCE DIAGRAM
TOLERANCE:±0.05

2	CONTACT	BRASS	BRIGHT Tin
1	HOUSING	PA10T,94V-0	NATURE
NO.	PART NAME	MATERIAL	REMARK



SCALE: 1:1	UNIT: mm
SIZE: A4	

Title:	Wafer 1.25mm Pitch 90° DIP Type Single Row Connector
--------	---

General Tolerance:

X	±0.40
X.x	±0.30
X.xx	±0.20
X°	±5°
X.X°	±3°

Molde Code: GT-A1251WRD-1XXXXX01

DRAWN	CHECKED	APPROVED	DATE
Hu	Hu	Chen	2021.10.20

 品贊科技
b-Switch
www.dg-switch.com

REV: A0

SHEET: 1/1