
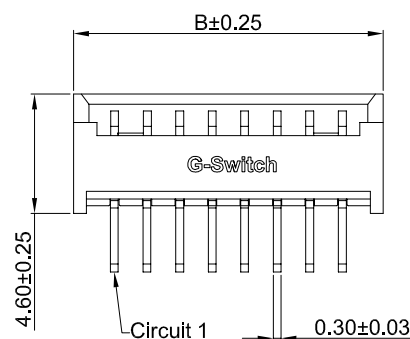

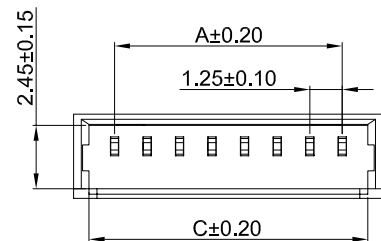

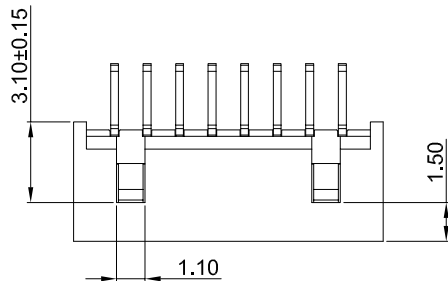


- G-Switch Specification:**
- 1.Current rated: 1.0A AC/DC
 - 2.Voltage rating: 125V AC/DC
 - 3.Withstanding voltage: 250V AC
 - 4.Contact resistance: 20mΩ max.
 - 5.Insulation resistance: 100MΩ min
 - 6.Durability cycle: 50Cycles
 - 7.Removal force: 0.50kgf/Pin min
 - 8.Operating temperature range: -25°C ~ +85°C

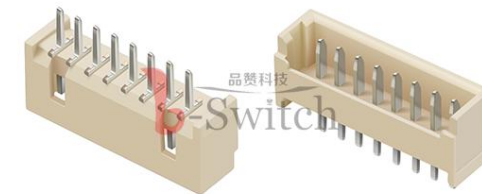

GT-A1251 W V D-1 XX X XX 0X

G-Switch

Series No

Connector
W-Wafer

Angle
V-180°

TermIpnt
D-DIP

Type
01-Type 1
02-Type 2

Terminal Plating
BT-Bright Tin

Housing Colour
S-Nature

Pin Q' PY
02~16

Row NO
1-Single Row

Ordering Information:

Circuit	Dimensions(mm)			Circuit	Dimensions(mm)		
	A	B	C		A	B	C
02	—	4.30	3.25	12	13.75	16.80	15.75
03	2.50	5.55	4.50	13	15.00	18.05	17.00
04	3.75	6.80	5.75	14	16.25	19.30	18.25
05	5.00	8.05	7.00	15	17.50	20.55	19.50
06	6.25	9.30	8.25	16	18.75	21.80	20.75
07	7.50	10.55	9.50	17	20.00	23.05	22.00
08	8.75	11.80	10.70	18	21.25	24.30	23.25
09	10.00	13.05	12.00	19	22.50	25.55	24.50
10	11.25	14.30	13.25	20	23.75	26.80	25.75
11	12.50	15.55	14.50	—	—	—	—

SCALE: 1:1 UNIT: mm
SIZE: A4

Title: Wafer 1.25mm Pitch 180° DIP Type
Single Row Connector

Molde Code: GT-A1251WVD-1XXXXX01

DRAWN	CHECKED	APPROVED	DATE
Hu	Hu	Chen	2021.10.20

Unless otherwise
General Tolerance:
X ±0.40
X.x ±0.30
X.xx ±0.20
X° ±5°
X.x° ±3°



2	CONTACT	BRASS	BRIGHT Tin
1	HOUSING	PA10T,94V-0	NATURE
NO.	PART NAME	MATERIAL	REMARK

品赞科技
b-Switch
www.dg-switch.com

REV: A0 SHEET: 1/1