









A

B


C

D

E

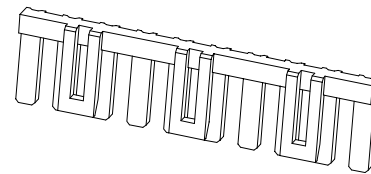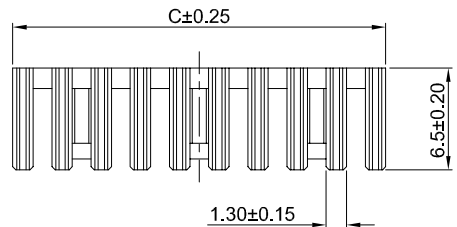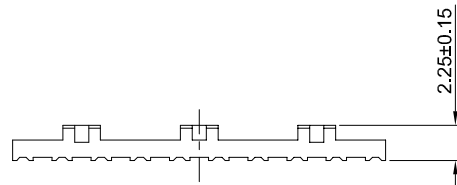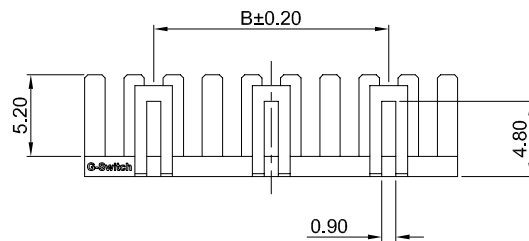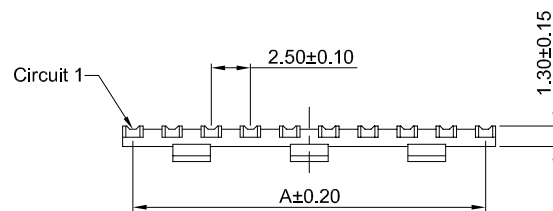

2-5Pin



6-15Pin



GT-A2508 C 1 -1 XX X 01

G-Switch

Series No

Connector
C-Cover

1-Type 1

Housing Colour
B-BlackPin Q' PY
02~15Row NO
1-Single Row**G-Switch Specification:**

- 1.Current rated: 3.0A AC/DC
- 2.Voltage rating: 250V AC/DC
- 3.Withstanding voltage: 1000V AC
- 4.Contact resistance: 10mΩ max.
- 5.Insulation resistance: 1000MΩ min
- 6.Durability cycle: 50Cycles
- 7.Removal force: 2.0kgf/Pin min
- 8.Operating temperature range: -25°C ~ +85°C

Ordering Information:

Circuit	Dimensions(mm)			Circuit	Dimensions(mm)		
	A	B	C		A	B	C
02	—	—	3.80	09	20.00	15.00	21.30
03	5.00	—	6.30	10	22.50	17.50	23.80
04	7.50	—	8.80	11	25.00	20.00	26.30
05	10.00	—	11.30	12	27.50	22.50	28.80
06	12.50	7.50	13.80	13	30.00	25.00	31.30
07	15.00	10.00	16.30	14	32.50	27.50	33.80
08	17.50	12.50	18.80	15	35.00	30.00	36.30

SCALE: 1:1
UNIT: mm

SIZE: A4

Unless otherwise
General Tolerance:
X ±0.40
X.x ±0.30
X.xx ±0.20
X° ±5°
X.x° ±3°

Title: Cover 2.50mm Pitch XA Single Row

Molde Code: GT-A2508C1-1XXX01

DRAWN	CHECKED	APPROVED	DATE
Hu	Chen	Chen	2022.12.28

品赞科技
b-Switch
www.dg-switch.com

REV: A0 SHEET: 1/1

1	COVER	PA66,94V-0	BLACK
NO.	PART NAME	MATERIAL	REMARK

