
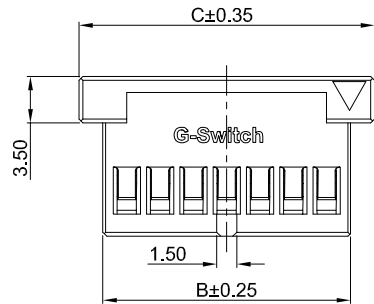
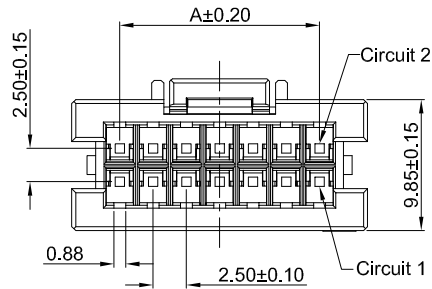



8Pin

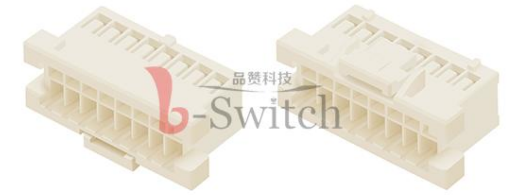

GT-A2508 H M -2 XX X 01

G-Switch

Series No

Connector
H-Housing

M-Male

Housing Colour
W-White

Pin Q' PY
08~40

Row NO
2-Dual Rows

G-Switch Specification:

- 1.Current rated: 3.0A AC/DC
- 2.Voltage rating: 250V AC/DC
- 3.Withstanding voltage: 1000V AC
- 4.Contact resistance: 10mΩ max.
- 5.Insulation resistance: 1000MΩ min
- 6.Durability cycle: 50Cycles
- 7.Removal force: 2.0kgf/Pin min
- 8.Operating temperature range: -25°C ~ +85°C

Ordering Information:

Circuit	Dimensions(mm)				Circuit	Dimensions(mm)			
	A	B	C	D		A	B	C	D
08	7.50	11.10	14.70	9.60	24	27.50	31.10	34.70	17.70
10	10.00	13.60	17.20	9.60	26	30.00	33.60	37.20	17.70
12	12.50	16.10	19.70	10.20	28	32.50	36.10	39.70	17.70
14	15.00	18.60	22.20	10.20	30	35.00	38.60	42.20	17.70
16	17.50	21.10	24.70	10.20	32	37.50	41.10	44.70	17.70
18	20.00	23.60	27.20	17.70	34	40.00	43.60	47.20	17.70
20	22.50	26.10	29.70	17.70	36	42.50	46.10	49.70	17.70
22	25.00	28.60	32.20	17.70	40	47.50	51.10	54.70	17.70

SCALE: 1:1

UNIT: mm

SIZE: A4



Unless otherwise

General Tolerance:

X ±0.40

X.x ±0.30

X.xx ±0.20

X° ±5°

X.x° ±3°

Title: Housing 2.50mm Pitch XAD Dual Rows Male

Molde Code: GT-A2508HM-2XXX01

DRAWN CHECKED APPROVED DATE

Hu Chen Chen 2021.10.20

品質科技
b-Switch
www.dg-switch.com

REV: A0 SHEET: 1/1

1	HOUSING	PA66,94V-0	WHITE
NO.	PART NAME	MATERIAL	REMARK

