

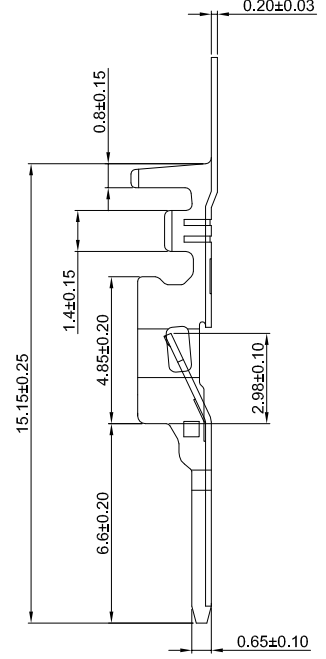
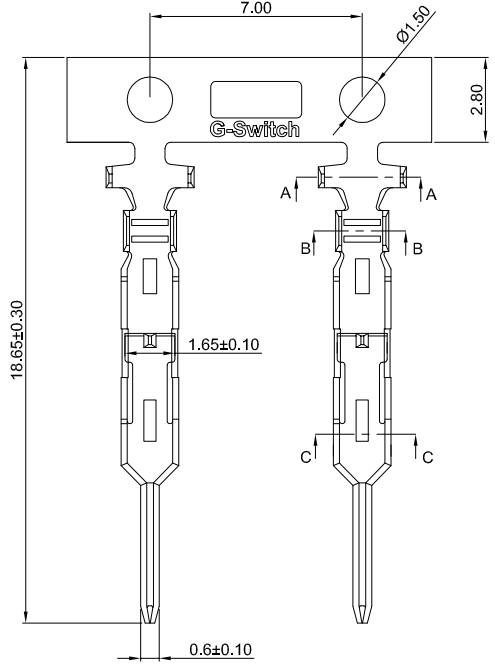


SECTION: A-A



SECTION: B-B



SECTION: C-C



GT-A2508 T M -X XX 1

G-Switch

Series No

Connector
T-Terminal

Terminal Plating
BT-Bright Tin

Metal
P-Phosphor Bronze

M-Male

G-Switch Specification:

- 1.Current rated: 3.0A AC/DC
- 2.Voltage rating: 250V AC/DC
- 3.Withstanding voltage: 1000V AC
- 4.Contact resistance: 10mΩ max.
- 5.Insulation resistance: 1000MΩ min
- 6.Durability cycle: 50Cycles
- 7.Removal force: 2.0kgf/Pin min
- 8.Operating temperature range: -25°C ~ +85°C

GT-A2508TM-PBT1	Phosphor bronze	Bright Tin	AWG#22~#26	1.60mm(Max)	7000
Part NO	Material	Plating	Wire Size	Insulation O.D	Reel/PCS



SCALE: 1:1	UNIT: mm	Title: Terminal 2.50mm Pitch Crimp Style Male			
SIZE: A4		Molde Code: GT-A2508TM-XXX1			
Unless otherwise General Tolerance: X ±0.40 X.x ±0.30 X.xx ±0.20 X* ±5° X.x° ±3°		DRAWN	CHECKED	APPROVED	DATE
		Hu	Hu	Chen	2021.10.20
		REV: A0			
		SHEET: 1/1			

