

1

2




3

4


5

A

A



02Pin



03Pin



B

B

GT-A2513 C M -1 XX X 01

G-Switch

Series No



Connector
C-Cover

M-Male


Housing Colour
S-Nature
B-BlackPin Q' PY
02-08Row NO
1-Single Row

C

C

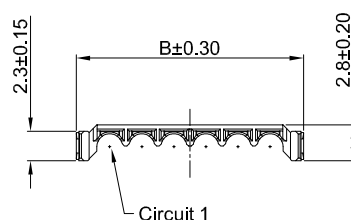

04Pin




05Pin

G-Switch Specification:


- 1.Current rated: 5.0-6.5A AC/DC
- 2.Voltage rating: 250V AC/DC
- 3.Withstanding voltage: 1500V AC
- 4.Contact resistance: 20mΩ max.
- 5.Insulation resistance: 1000MΩ min
- 6.Durability cycle: 25Cycles
- 7.Removal force: 3.5kgf/Pin min
- 8.Operating temperature range: -40°C ~ +105°C

D


D



06Pin

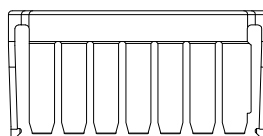

07Pin

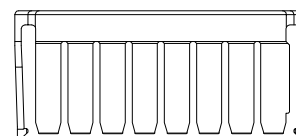

08Pin

Ordering Information:

Circuit	Dimensions(mm)		Circuit	Dimensions(mm)	
	A	B		A	B
02	---	7.70	06	12.50	17.70
03	5.00	10.20	07	15.00	20.20
04	7.50	12.70	08	17.50	22.70
05	10.00	15.20	---	---	---

E

E

1	COVER	PA6T,94V-0	BLACK/NATURE
NO.	PART NAME	MATERIAL	REMARK

1

2

3

4

5

SCALE: 1:1 UNIT: mm
SIZE: A4Unless otherwise
General Tolerance:
X ±0.40
X.x ±0.30
X.xx ±0.20
X° ±5°
X.x° ±3°

Title: Cover 2.50mm Pitch MX Single Row Male

Molde Code: GT-A2513CM-1XXX01

DRAWN	CHECKED	APPROVED	DATE
Hu	Hu	Chen	2021.10.20

品赞科技
b-Switch
www.dg-switch.com

REV: A0 SHEET: 1/1