

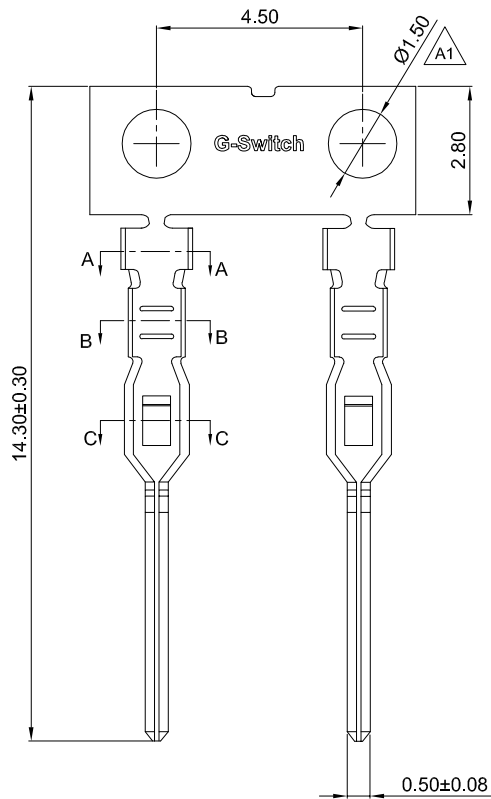


SECTION: A-A



SECTION: B-B



SECTION: C-C



GT-A2001 T M -X XX 1

G-Switch

Series No

Connector
T-Terminal

Terminal Plating
BT-Bright Tin

Metal
P-Phosphor bronze

M-Male

G-Switch Specification:

- 1.Current rated: 2.0A AC/DC
- 2.Voltage rating: 100V AC/DC
- 3.Withstanding voltage: 800V AC
- 4.Contact resistance: 10mΩ max.
- 5.Insulation resistance: 1000MΩ min
- 6.Durability cycle: 30Cycles
- 7.Removal force: 1.20kgf/Pin min
- 8.Operating temperature range: -25°C ~ +85°C

GT-A2001TM-PBT1	Phosphor bronze	Bright Tin	AWG#24~28	1.30mm(Max)	16000
Part NO	Material	Plating	Wire Size	Insulation O.D	Reel/PCS



SCALE: 1:1	UNIT: mm	Title: Terminal 2.00mm Pitch PH Crimp Style			
SIZE: A4		Molde Code: GT-A2001TM-XXX1			
Unless otherwise General Tolerance: X ±0.40 X.x ±0.30 X.xx ±0.20 X° ±5° X.x° ±3°		DRAWN	CHECKED	APPROVED	DATE
		Hu	Chen	Chen	2026.08.08
		REV: A1			
		SHEET: 1/1			

