

A

B

C

D

E








1

2


3

4

5

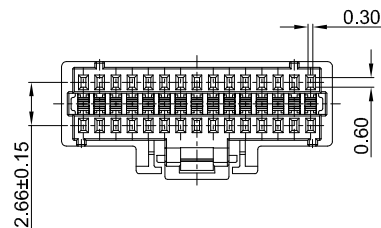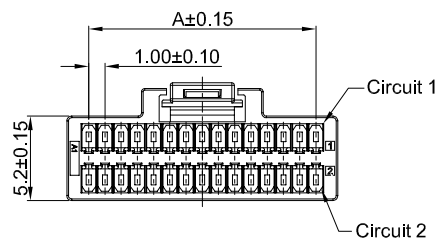

16Pin

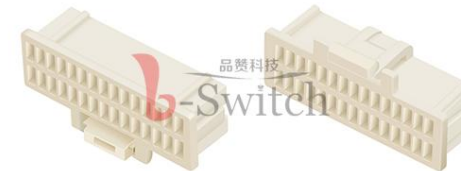

GT-A1008H M -2 XX X 01

G-Switch

Series No

Connector
H-Housing

M-Male

Housing Colour
W-WhitePin Q'PY
16~50Row NO
2-Dual Rows**G-Switch Specification:**

- 1.Current rated: 1.0A AC/DC
- 2.Voltage rating: 100V AC/DC
- 3.Withstanding voltage: 250V AC
- 4.Contact resistance: 20mΩ max.
- 5.Insulation resistance: 100MΩ min
- 6.Durability cycle: 30Cycles
- 7.Removal force: 0.3kgf/Pin min
- 8.Operating temperature range: -40°C ~ +105°C

Ordering Information:

Circuit	Dimensions(mm)			Circuit	Dimensions(mm)		
	A	B	C		A	B	C
16	7.00	9.70	8.30	28	13.00	15.70	14.30
20	9.00	11.70	10.30	30	14.00	16.70	15.30
22	10.00	12.70	11.30	36	17.00	19.70	18.30
24	11.00	13.70	12.30	40	19.00	21.70	20.30
26	12.00	14.70	13.30	50	24.00	26.70	25.30

SCALE: 1:1 UNIT: mm

SIZE: A4

Unless otherwise
General Tolerance:
X ±0.40
X.x ±0.30
X.xx ±0.20
X* ±5°
X.x° ±3°

Title: Housing 1.00mm Pitch Dual Rows Male

Molde Code: GT-A1008HM-2XXX01

DRAWN	CHECKED	APPROVED	DATE
Hu	Hu	Chen	2021.10.20

品赞科技
b-Switch
www.dg-switch.com

REV: A0 SHEET: 1/1

1	HOUSING	PA66,94V-0	WHITE
NO.	PART NAME	MATERIAL	REMARK

1

2

3

4

5

