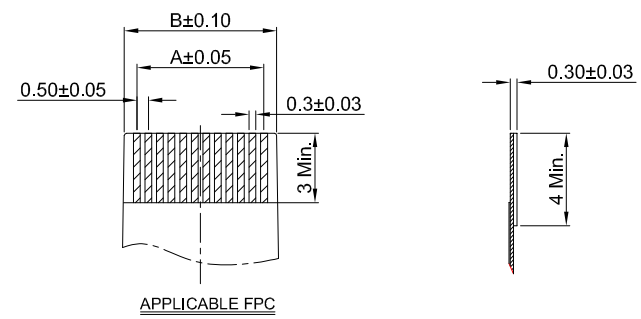
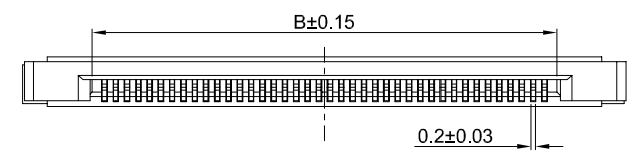
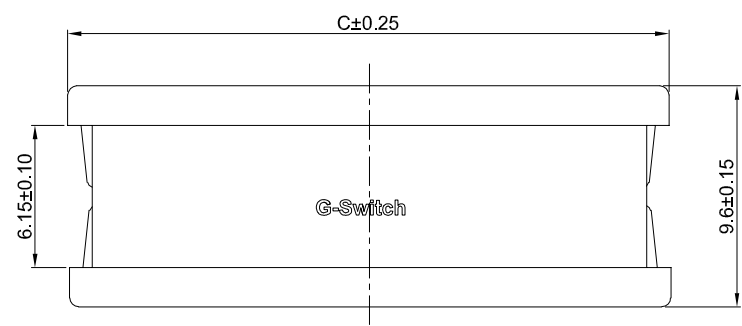
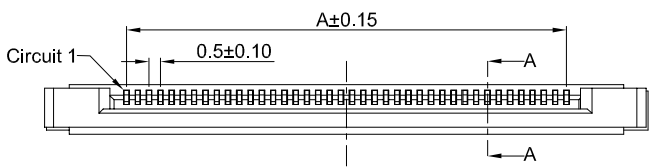


GT-F0521 A R 22 -XX X XX 01

G-Switch
Series No
Termipoint
A-Air Docking
Angle
R-90°
Terminal Plating
BT-Bright Tin
Housing Colour
S-Nature
Pin Q' PY
06~60
Height
22-2.2mm

- G-Switch Specification:**
- 1.Current rated: 0.5A AC/DC
 - 2.Voltage rating: 50V AC/DC
 - 3.Withstanding voltage: 500V AC for 1 min
 - 4.Contact resistance: 40mΩ max.
 - 5.Insulation resistance: 500MQ min
 - 6.Durability cycle: 20Cycles
 - 7.Removal force: 0.03kgf/Pin min
 - 8.Operating temperature range: -55°C ~ +85°C

Ordering Information:

Circuit	Dimensions(mm)			Circuit	Dimensions(mm)		
	A	B	C		A	B	C
06	2.50	3.60	9.66	40	19.50	20.60	26.66
20	9.50	10.60	16.66	50	24.50	25.60	31.66
24	11.50	12.60	18.66	60	29.50	30.60	36.66
30	14.50	15.60	21.66	--	--	--	--

3	CONTACT	PHOSPHOR BRONZE	BRIGHT Tin
2	COVER	LCP,94V-0	BLACK
1	HOUSING	LCP,94V-0	NATURE
NO.	PART NAME	MATERIAL	REMARK



SCALE: 1:1	UNIT: mm	Title: FPC 0.50mm Pitch 90° Air Docking Type H2.0mm Connector	
SIZE: A4		Molde Code: GT-F0521AR22-XXXXX01	
Unless otherwise General Tolerance: X ±0.40 X.x ±0.30 X.xx ±0.20 X° ±5° X.x° ±3°		DRAWN	CHECKED
		APPROVED	DATE
		Jlang	Hu
		Chen	2021.06.28

品赞科技
b-Switch
www.dg-switch.com

REV: A0 SHEET: 1/1