


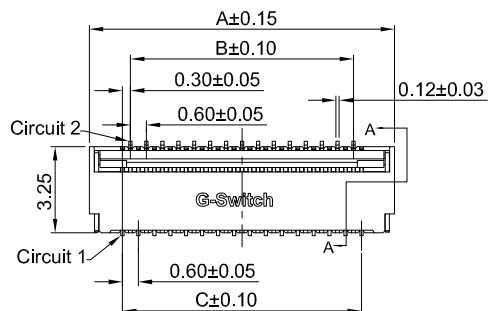




A





B



C

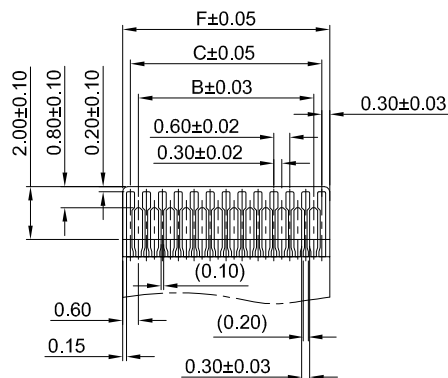

APPLICABLE FPC

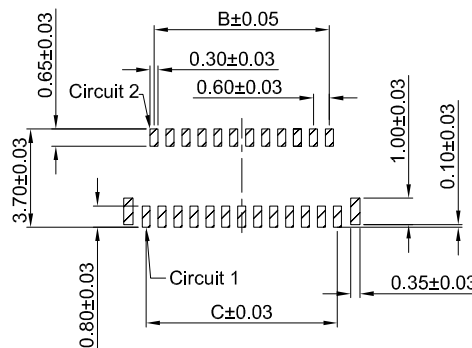PCB REFERENCE DIAGRAM
TOLERANCE:±0.05

D

E

4	SOLDER TABS	PHOSPHOR BRONZE C5210	MATTE Tin
3	CONTACT	PHOSPHOR BRONZE C5210	Gold-Flash On Contact Area
2	COVER	LCP,94V-0	BLACK
1	HOUSING	LCP,94V-0	NATURE
NO.	PART NAME	MATERIAL	REMARK

SCALE: 1:1 UNIT: mm
SIZE: A4Unless otherwise
General Tolerance:
X ±0.40
X.x ±0.30
X.xx ±0.20
X* ±5°
X.x° ±3°Title: FPC 0.30mm Pitch 90° SMT Type
H1.00mm Back Flip Connector

Molde Code: GT-F0301SR10-XXXXX01

DRAWN	CHECKED	APPROVED	DATE
Hu	Hu	Chen	2022.12.28

品赞科技
b-Switch
www.dg-switch.com

REV: A0 SHEET: 1/2

GT-F0301 S R 10 -XX X XX 01

G-Switch




Series No

Termipoint
S-SMTAngle
R-90°Terminal Plating
01-G/FHousing Colour
S-NaturePin Q' PY
09Height
10-1.05mm**G-Switch Specification:**

- 1.Current rated: 0.3A AC/DC
2. Voltage rating: 30V AC/DC
- 3.Withstanding voltage: 500V AC for 1 min
- 4.Contact resistance: 100mΩ max.
- 5.Insulation resistance: 50MΩ min
- 6.Durability cycle: 10Cycles
- 7.Removal force: 0.015kgf/Pin min
- 8.Operating temperature range: -45°C ~ +85°C

Ordering Information:

Circuit	Dimensions(mm)					
	A	B	C	D	E	F
09	4.30	1.80	2.40	3.03	3.75	3.00

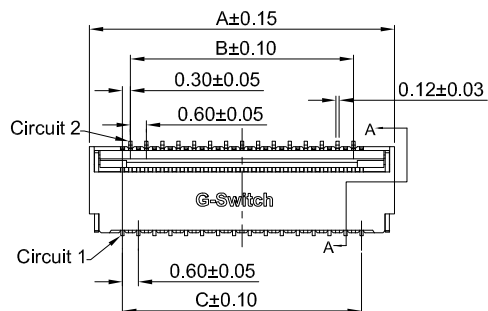

G-Switch Specification:

- 1.Current rated: 0.3A AC/DC
2. Voltage rating: 30V AC/DC
- 3.Withstanding voltage: 500V AC for 1 min
- 4.Contact resistance: 100mΩ max.
- 5.Insulation resistance: 50MΩ min
- 6.Durability cycle: 10Cycles
- 7.Removal force: 0.015kgf/Pin min
- 8.Operating temperature range: -45°C ~ +85°C



GT-F0301 S R 10 -XX X XX 01

G-Switch

Series No

Termipoint
S-SMT






Angle
R-90°

Terminal Plating
01-G/F



Housing Colour
S-Nature

— Pin Q' PY
11~51

— **Height**
10-1.05mm

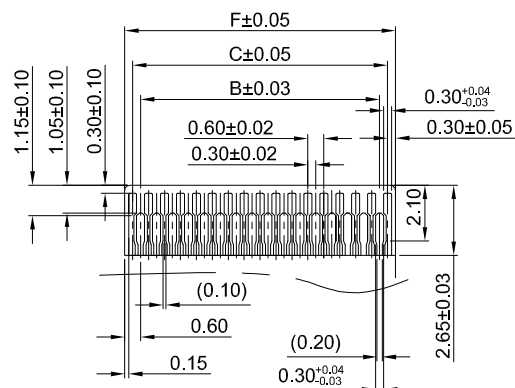

APPLICABLE FPC

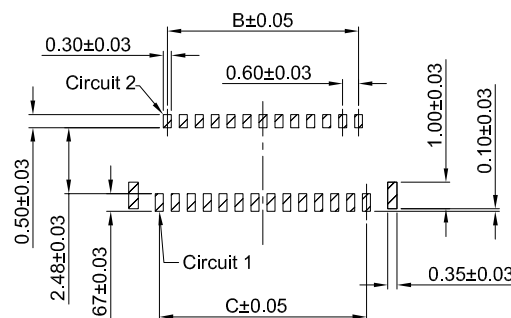

PCB REFERENCE DIAGRAM
TOLERANCE:±0.05

Ordering Information:

Circuit	Dimensions(mm)					
	A	B	C	D	E	F
11	5.50	2.40	3.00	3.63	4.95	3.60
13	6.10	3.00	3.60	4.23	5.55	4.20
15	6.70	3.60	4.20	4.83	6.15	4.80
17	7.30	4.20	4.80	5.43	6.75	5.40
19	7.90	4.80	5.40	6.03	7.35	6.00
21	8.50	5.40	6.00	6.63	7.95	6.60
23	9.10	6.00	6.60	7.23	8.55	7.20
25	9.70	6.60	7.20	7.83	9.15	7.80
27	10.30	7.20	7.80	8.43	9.75	8.40
29	10.90	7.80	8.40	9.03	10.35	9.00
31	11.50	8.40	9.00	9.63	10.95	9.60
33	12.10	9.00	9.60	10.23	11.55	10.20
35	12.70	9.60	10.20	10.83	12.15	10.80
37	13.30	10.20	10.80	11.43	12.75	11.40
39	13.90	10.80	11.40	12.03	13.35	12.00
41	14.50	11.40	12.00	12.63	13.95	12.60
43	15.10	12.00	12.60	13.23	14.55	13.20
45	15.70	12.60	13.20	13.83	15.15	13.80
47	16.30	13.20	13.80	14.43	15.75	14.40
49	16.90	13.80	14.40	15.03	16.35	15.20
51	17.50	14.40	15.00	15.63	16.95	15.60

4	SOLDER TABS	PHOSPHOR BRONZE C5210	MATTE Tin
3	CONTACT	PHOSPHOR BRONZE C5210	Gold-Flash On Contact Area
2	COVER	LCP,94V-0	BLACK
1	HOUSING	LCP,94V-0	NATURE
NO.	PART NAME	MATERIAL	REMARK



SCALE: 1:1	UNIT: mm
SIZE: A4	

Unless otherwise

X	±0.40
X.x	±0.30
X.xx	±0.20
X°	±5°
X.X°	±3°

Title: FPC 0.30mm Pitch 90° SMT Type
H1.00mm Back Flip Connector

Molde Code: GT-F0301SR10-XXXXX01

DRAWN	CHECKED	APPROVED	DATE
Hu	Hu	Chen	2022.12.28

 品赞科技
www.dg-switch.com

REV: A0	SHEET: 2/2
---------	------------