

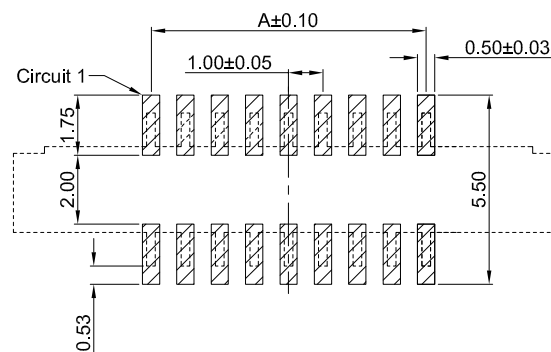


- 1.Current rated: 0.4A AC/DC
- 2.Voltage rating: 50V AC/DC
- 3.Withstanding voltage: 200V AC
- 4.Contact resistance: 20mΩ max.
- 5.Insulation resistance: 500MΩ min
- 6.Durability cycle: 30Cycles
- 7.Remove force: 0.21kgf/Pin min
- 8.Operating temperature range: -25°C ~ +85°C

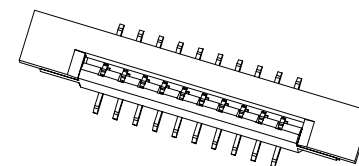

— **Height**
54-5.37mm



PCB REFERENCE DIAGRAM
TOLERANCE:±0.05

SCALE: 1:1	UNIT: mm
SIZE: A4	

Unless otherwise	
General Tolerance:	
X	±0.40
X.x	±0.30
X.xx	±0.20
X°	±5°
X.x°	±3°

Title: FPC 1.00mm Pitch 180° H5.40mm SMT
Type Single Row Connector

Molde Code: GT-F1003SV54-XXXXX01

DRAWN	CHECKED	APPROVED	DATE
Jiang	Hu	Chen	2021.06.28

 品赞科技
b-Switch
www.dg-switch.com

REV: A0	SHEET: 1/1
---------	------------