
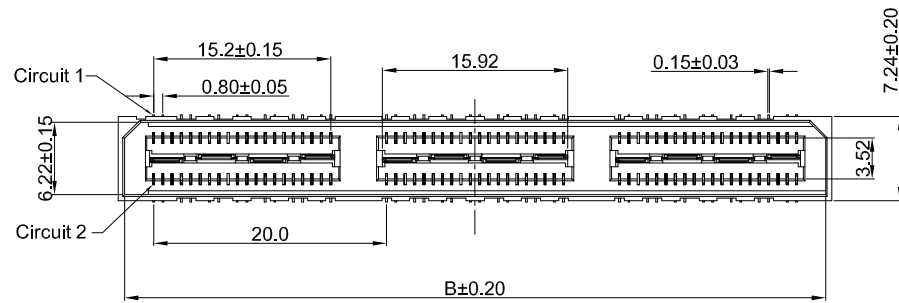

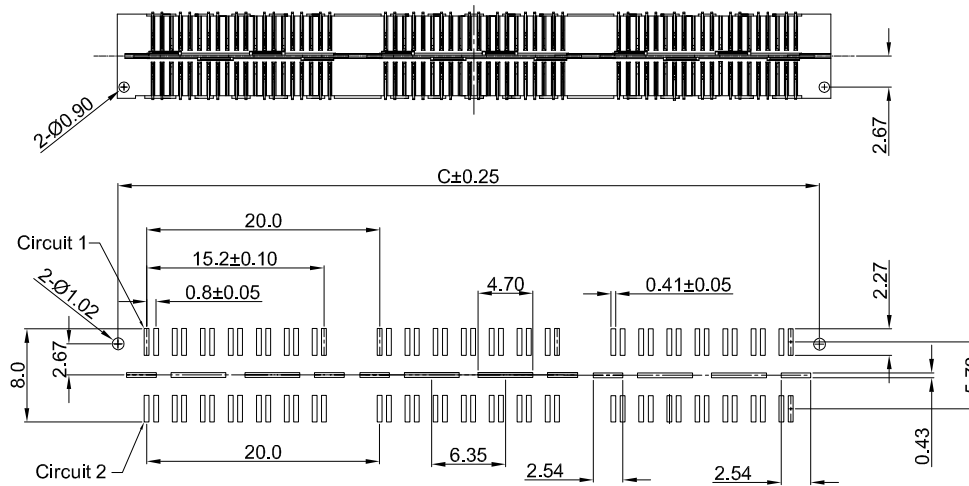



SECTION:A-A

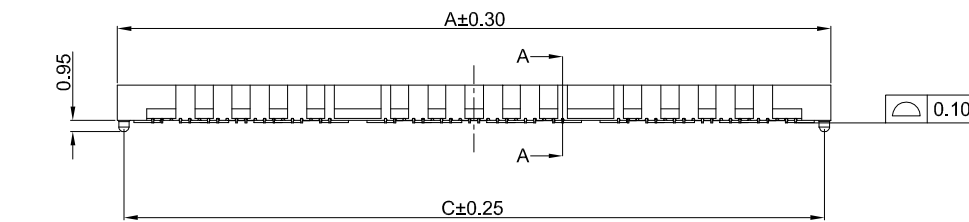

MATING HEIGHT

PCB REFERENCE DIAGRAM
TOLERANCE:±0.05

Ordering Information:

Circuit	Dimensions(mm)			Circuit	Dimensions(mm)		
	A	B	C		A	B	C
28	21.27	20.20	20.13	112	81.28	80.20	80.14
56	41.28	40.20	40.13	140	101.28	100.20	100.14
84	61.28	60.20	60.13	---	---	---	---



SCALE: 1:1 UNIT: mm
SIZE: A4

Unless otherwise
General Tolerance:
X ±0.40
X.x ±0.30
X.xx ±0.20
X° ±5°
X.x° ±3°

Title: BTB 0.80mm Pitch 180° Dual Rows
SMT Type Female Connector

Molde Code: GT-B0806FSV32-XXXXX02

DRAWN	CHECKED	APPROVED	DATE
Hu	Hu	Chen	2022.12.28

品赞科技
b-Switch
www.dg-switch.com

REV: A0 SHEET: 1/1



GT-B0806 F S V 32 -XX X XX 02

G-Switch
Series No
F-Female
Termipoint
S-SMT
Angle
V-180°
Terminal Plating
04-Au10μ"
Housing Colour
B-Black
Pin Q' PY
40~200
Height
32-3.25mm

G-Switch Specification:

- 1.Current rated: 2.0A AC/DC
- 2.Voltage rating: 225V AC/DC
- 3.Withstanding voltage: 675V AC
- 4.Contact resistance: 15mΩ Max.
- 5.Insulation resistance: 5000MΩ min
- 6.Durability cycle: 500 Cycles
- 7.Removal force: 0.01kgf/Pin min
- 8.Operating temperature range: -55°C ~ +125°C

2	CONTACT	PHOSPHOR BRONZE	Au10μ" ON CONTACT AREA
1	HOUSING	LCP,94V-0	BLACK
NO.	PART NAME	MATERIAL	REMARK