
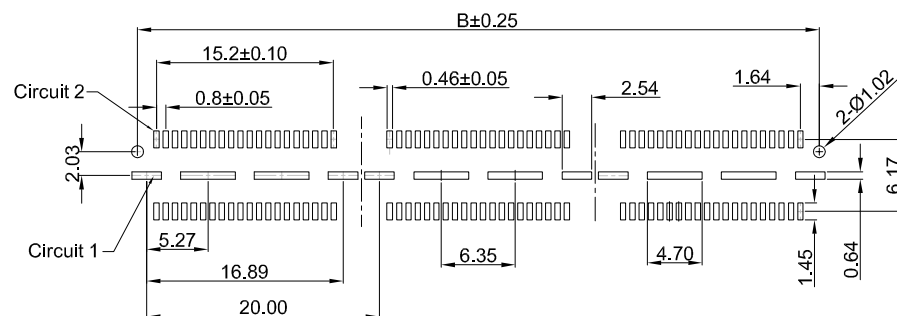



$H1^{+0.08}_{-0.03}$

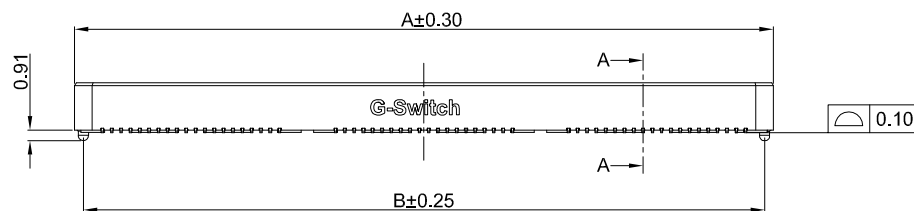

Circuit	Dimensions(mm)		Circuit	Dimensions(mm)	
	A	B		A	B
40	20.00	18.48	160	80.00	78.49
80	40.00	38.48	200	100.00	98.49
120	60.00	58.48	---	---	---

MATING HEIGHT(H3)	PLUG (H1.mm)	SOCKET (H2.mm)
5.00	4.265	3.25
8.00	7.264	3.25
11.00	10.269	3.25
14.00	13.269	3.25
15.00	14.269	3.25
16.00	15.246	3.25
19.00	18.240	3.25
22.00	21.237	3.25
25.00	24.237	3.25
30.00	29.238	3.25

- 1.Current rated: 2.0A AC/DC
- 2.Voltage rating: 225V AC/DC
- 3.Withstanding voltage: 675V AC
- 4.Contact resistance: 15mΩ Max.
- 5.Insulation resistance: 5000MΩ min
- 6.Durability cycle: 500 Cycles
- 7.Remove force: 0.01kgf/Pin min
- 8.Operating temperature range: -55°C ~ +125°C

2	CONTACT	PHOSPHOR BRONZE	Au10μ" ON CONTACT AREA
1	HOUSING	LCP,94V-0	BLACK
NO.	PART NAME	MATERIAL	REMARK

SCALE: 1:1	UNIT: mm
SIZE: A4	

Unless otherwise	
General Tolerance:	
X	±0.40
X.x	±0.30
X.xx	±0.20
X°	±5°
X.x°	±3°

Title:	BTB 0.80mm Pitch 180° Dual Rows SMT Type Mate Connector
--------	--

Molde Code: GT-B0806MSVXX-XXXXX01

DRAWN	CHECKED	APPROVED	DATE
Hu	Hu	Chen	2022.12.28

 品贊科技
www.dg-switch.com

REV: A0	SHEET: 1/1
---------	------------