


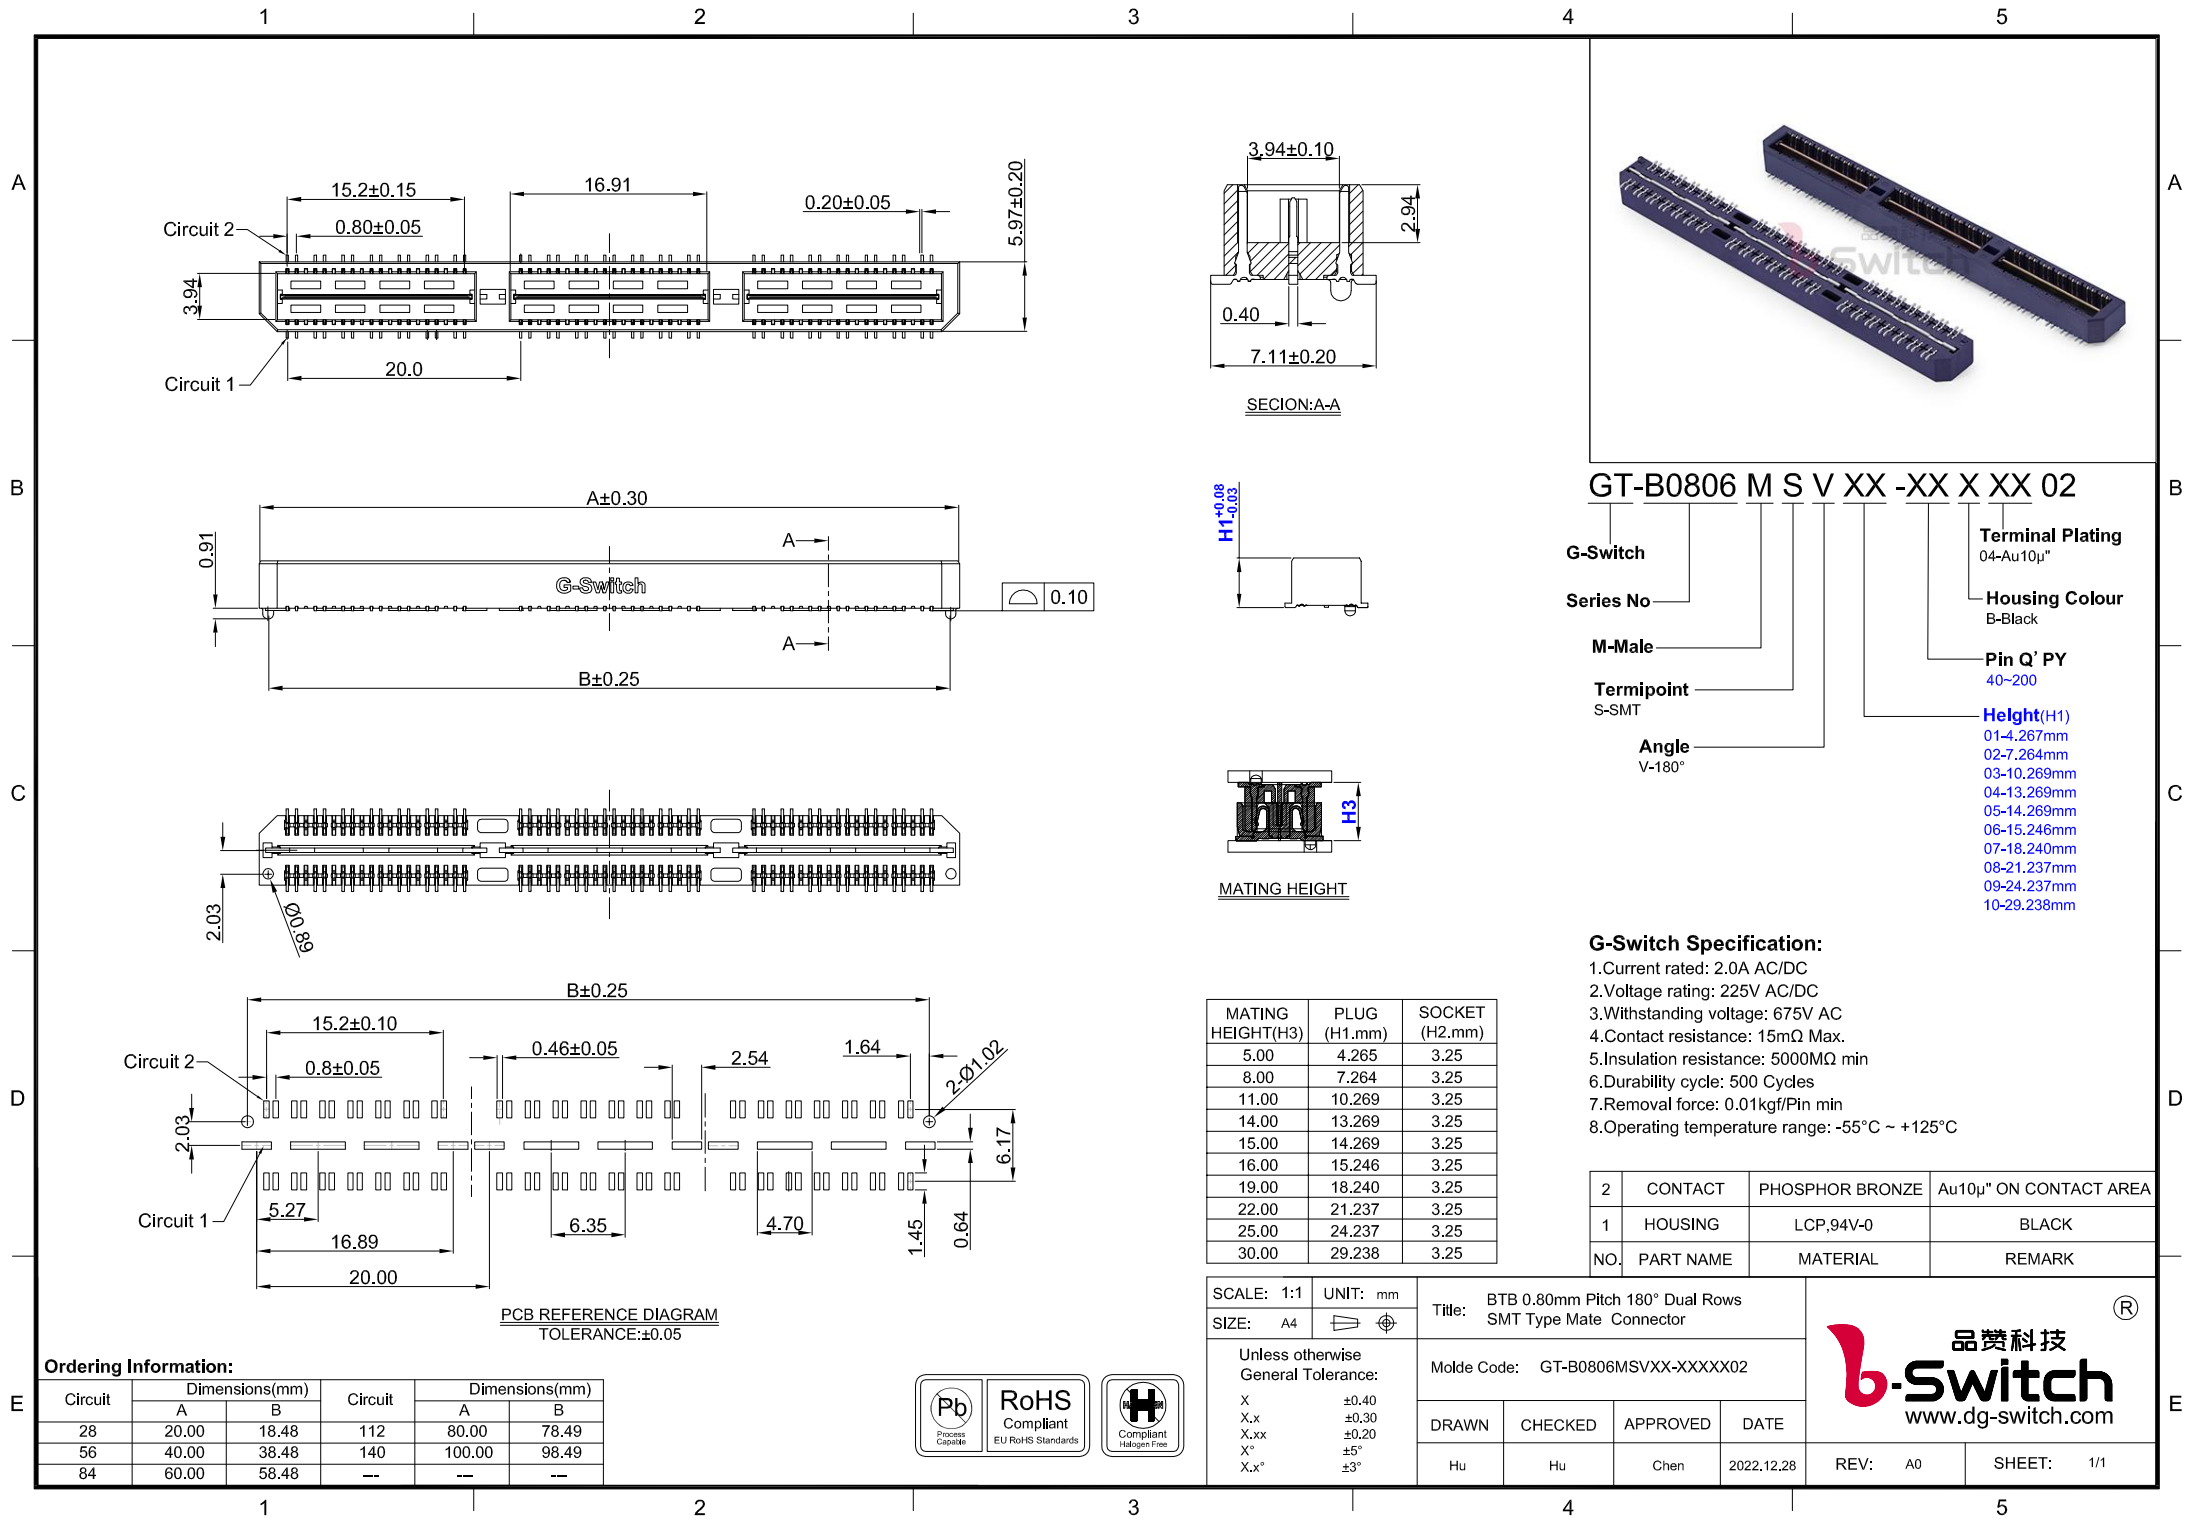

GT-B0806 M S V XX -XX X XX 02

G-Switch

Series No

M-Male

Termipoint
S-SMT

Angle
V-180°

Terminal Plating
04-Au10μ"

Housing Colour
B-Black

Pin Q' PY
40-200

Height(H1)
01-4.267mm
02-7.264mm
03-10.269mm
04-13.269mm
05-14.269mm
06-15.246mm
07-18.240mm
08-21.237mm
09-24.237mm
10-29.238mm

G-Switch Specification:

- 1.Current rated: 2.0A AC/DC
- 2.Voltage rating: 225V AC/DC
- 3.Withstanding voltage: 675V AC
- 4.Contact resistance: 15mΩ Max.
- 5.Insulation resistance: 5000MΩ min
- 6.Durability cycle: 500 Cycles
- 7.Removal force: 0.01kgf/Pin min
- 8.Operating temperature range: -55°C ~ +125°C

2	CONTACT	PHOSPHOR BRONZE	Au10μ" ON CONTACT AREA
1	HOUSING	LCP,94V-0	BLACK
NO.	PART NAME	MATERIAL	REMARK