


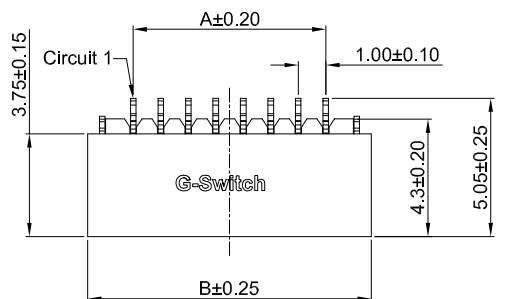
A

B






C

D


E



SECTION A-A

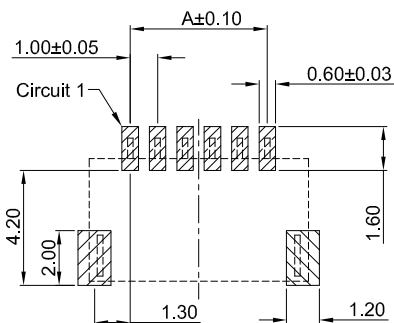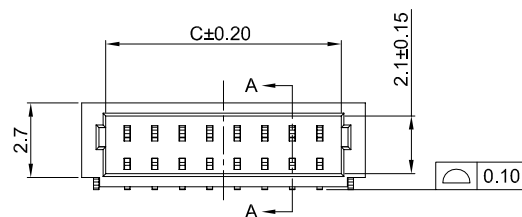PCB REFERENCE DIAGRAM
TOLERANCE:±0.05**G-Switch Specification:**

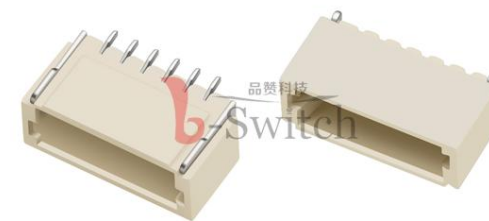- 1.Current rated: 1.0A AC/DC
- 2.Voltage rating: 50V AC/DC
- 3.Withstanding voltage: 500V AC
- 4.Contact resistance: 20mΩ max.
- 5.Insulation resistance: 100MΩ min
- 6.Durability cycle: 50Cycles
- 7.Removal force: 0.50kgf/Pin min
- 8.Operating temperature range: -25°C ~ +85°C



GT-A1002 W R S -1 XX X XX 01

G-Switch

Series No

Connector
W-WaferAngle
R-90°Termipoint
S-SMTTerminal Plating
BT-Bright Tin
11-All G/FHousing Colour
S-NaturePin Q' PY
02~20Row NO
1-Single row**Ordering Information:**

Circuit	Dimensions(mm)			Circuit	Dimensions(mm)		
	A	B	C		A	B	C
02	--	4.20	2.50	12	11.00	14.20	12.50
03	2.00	5.20	3.50	13	12.00	15.20	13.50
04	3.00	6.20	4.50	14	13.00	16.20	14.50
05	4.00	7.20	5.50	15	14.00	17.20	15.50
06	5.00	8.20	6.50	16	15.00	18.20	16.50
07	6.00	9.20	7.50	17	16.00	19.20	17.50
08	7.00	10.20	8.50	18	17.00	20.20	18.50
09	8.00	11.20	9.50	19	18.00	21.20	19.50
10	9.00	12.20	10.50	20	19.00	22.20	20.50
11	10.00	13.20	11.50	--	--	--	--

SCALE: 1:1

UNIT: mm

SIZE: A4

Title: Wafer 1.00mm Pitch 90° SH SMT
Type Connector

Unless otherwise

General Tolerance:

X ±0.40

X.x ±0.30

X.xx ±0.20

X° ±5°

X.x° ±3°

Molde Code: GT-A1002WRS-1XXXXX01

DRAWN

CHECKED

APPROVED

DATE

Hu

Chen

Chen

2021.10.20

品赞科技
www.dg-switch.com

REV: A0

SHEET: 1/1

3	SOLDER TABS	BRASS	BRIGHT Tin
2	CONTACT	BRASS	BRIGHT Tin / All G/F
1	HOUSING	LCP,94V-0	NATURE
NO.	PART NAME	MATERIAL	REMARK

