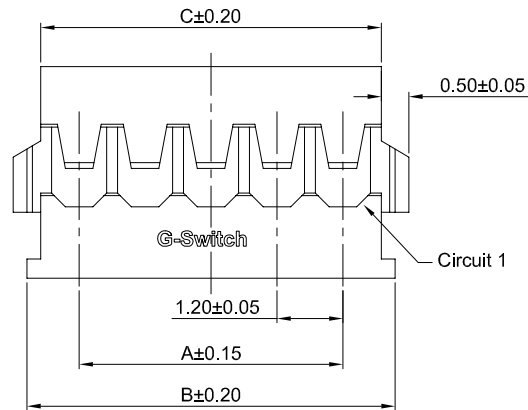


GT-A1201 H M-1 XX X 01

G-Switch

Series No

Connector
H-Housing

M-Male

Housing Colour
B-Black

Pin Q' PY
02~10

Row NO
1-Single Row

G-Switch Specification:

- 1.Current rated: 1.5A AC/DC
- 2.Voltage rating: 50V AC/DC
- 3.Withstanding voltage: 500V AC
- 4.Contact resistance: 20mΩ max.
- 5.Insulation resistance: 100MΩ min
- 6.Durability cycle: 10Cycles
- 7.Removal force: 0.05kgf/Pin min
- 8.Operating temperature range: -25°C ~ +85°C

Ordering Information:

Circuit	Dimensions (mm)			Circuit	Dimensions (mm)		
	A	B	C		A	B	C
02	1.20	3.10	2.60	06	6.00	7.90	7.40
03	2.40	4.30	3.80	07	7.20	9.10	8.60
04	3.60	5.50	5.00	09	9.60	11.50	11.00
05	4.80	6.70	6.20	10	10.80	12.70	12.20

SCALE: 1:1 UNIT: mm
SIZE: A4

Title: Housing 1.20mm Pitch Single Row Male

Unless otherwise
General Tolerance:

X ±0.40
X.x ±0.30
X.xx ±0.20
X° ±5°
X.x° ±3°

Molde Code: GT-A1201HM-1XXX01

DRAWN	CHECKED	APPROVED	DATE
Hu	Chen	Chen	2022.12.28

品赞科技
b-Switch
www.dg-switch.com

REV: A0 SHEET: 1/1

NO.	PART NAME	MATERIAL	REMARK
1	HOUSING	LCP,94V-0	BLACK

