




- 1.Current rated: 1.0A AC/DC
- 2.Voltage rating: 125V AC/DC
- 3.Withstanding voltage: 250V AC
- 4.Contact resistance: 20mΩ max.
- 5.Insulation resistance: 100MΩ min
- 6.Durability cycle: 50Cycles
- 7.Removal force: 0.50kgf/Pin min
- 8.Operating temperature range: -25°C ~ +85°C

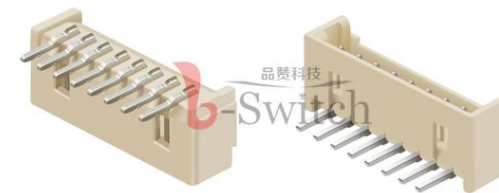

—Row NO
1-Single Row



TYPE 2

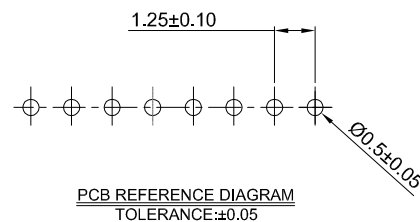

2	CONTACT	BRASS	BRIGHT Tin
1	HOUSING	PA10T,94V-0	NATURE
NO.	PART NAME	MATERIAL	REMARK



DRAWN	CHECKED	APPROVED	DATE
Hu	Hu	Chen	2021.10.20

 品赞科技
b-Switch
www.dg-switch.com

REV: A0	SHEET: 1/1
---------	------------