




- 1.Current rated: 1.0A AC/DC
- 2.Voltage rating: 125V AC/DC
- 3.Withstanding voltage: 500V AC
- 4.Contact resistance: 20mΩ max.
- 5.Insulation resistance: 100MΩ min
- 6.Durability cycle: 25Cycles
- 7.Removal force: 0.80kgf/Pin min
- 8.Operating temperature range: -25°C ~ +85°C

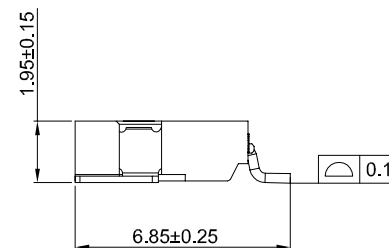

—Row NO
1-Single Row

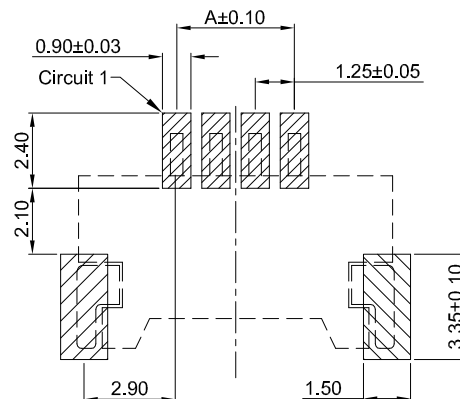

2-3Pin

Circuit	Dimensions(mm)				Circuit	Dimensions(mm)			
	A	B	C	D		A	B	C	D
02	---	7.40	3.87	---	12	13.75	19.90	16.37	12.50
03	2.50	8.65	5.12	---	13	15.00	21.15	17.62	13.75
04	3.75	9.90	6.37	2.50	14	16.25	22.40	18.87	15.00
05	5.00	11.15	7.62	3.75	15	17.50	23.65	20.12	16.25
06	6.25	12.40	8.87	5.00	16	18.75	24.90	21.37	17.50
07	7.50	13.65	10.12	6.25	17	20.00	26.15	22.62	18.75
08	8.75	14.90	11.37	7.50	18	21.25	27.40	23.87	20.00
09	10.00	16.15	12.62	8.75	19	22.50	28.65	25.12	21.25
10	11.25	17.40	13.87	10.00	20	23.75	29.90	26.37	22.50
11	12.50	18.65	15.12	11.25	---	---	---	---	---

SCALE: 1:1	UNIT: mm	Title: Wafer 1.25mm Pitch 90° SMT Type Single Row Connector			
SIZE: A4					
Unless otherwise General Tolerance: X ±0.40 X,x ±0.30 X,xx ±0.20 X* ±5° X,x° ±3°		Molde Code: GT-A1254WRS-1XXXXX01			
		DRAWN	CHECKED	APPROVED	DATE
		Hu	Chen	Chen	2022.12.2



REV: A0	SHEET: 1/1
---------	------------