

1

2



3

4


5

A

A

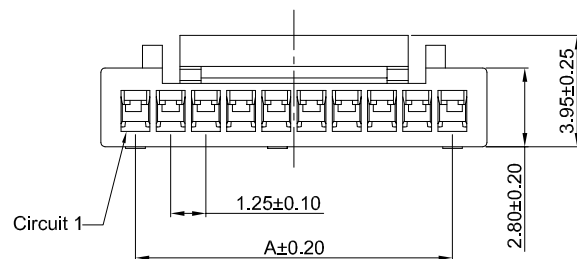

02Pin






3-4Pin



B

B

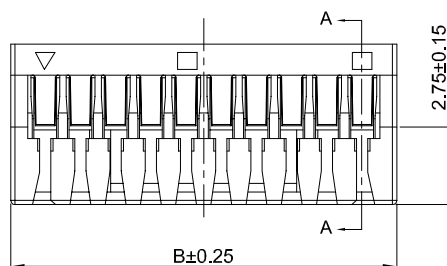

GT-A1257 H M -1 XX X 01

G-Switch

Series No

Connector
H-Housing

M-Male

Housing Colour
W-WhitePin Q' PY
02~16Row NO
1-Single Row**G-Switch Specification:**



- 1.Current rated: 1.0A AC/DC
- 2.Voltage rating: 50V AC/DC
- 3.Withstanding voltage: 500V AC
- 4.Contact resistance: 30mΩ max.
- 5.Insulation resistance: 100MΩ min
- 6.Durability cycle: 30Cycles
- 7.Removal force: 0.50kgf/Pin min
- 8.Operating temperature range: -25°C ~ +85°C

Ordering Information:

Circuit	Dimensions(mm)		Circuit	Dimensions(mm)	
	A	B		A	B
02	---	3.75	10	11.25	13.75
03	2.50	5.00	11	12.50	15.00
04	3.75	6.25	12	13.75	16.25
05	5.00	7.50	13	15.00	17.50
06	6.25	8.75	14	16.25	18.75
07	7.50	10.00	15	17.50	20.00
08	8.75	11.25	16	18.75	21.25
09	10.00	12.50	---	---	---

D

D

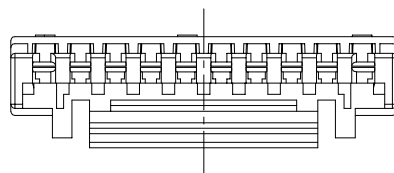

E

E

1	HOUSING	PA66,94V-0	WHITE
NO.	PART NAME	MATERIAL	REMARK

1

2

3

4

5

SCALE: 1:1 UNIT: mm

SIZE: A4

Title: Housing 1.25mm Pitch GH Single Row Male

Molde Code: GT-A1257HM-1XXX01

DRAWN	CHECKED	APPROVED	DATE
Hu	Chen	Chen	2021.10.20

Unless otherwise
General Tolerance:

X	±0.40
X.x	±0.30
X.xx	±0.20
X°	±5°
X.x°	±3°



品赞科技
b-Switch
www.dg-switch.com

REV: A0

SHEET: 1/1