
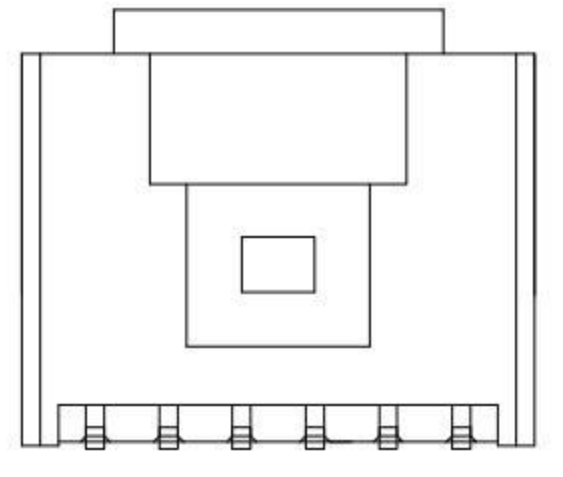
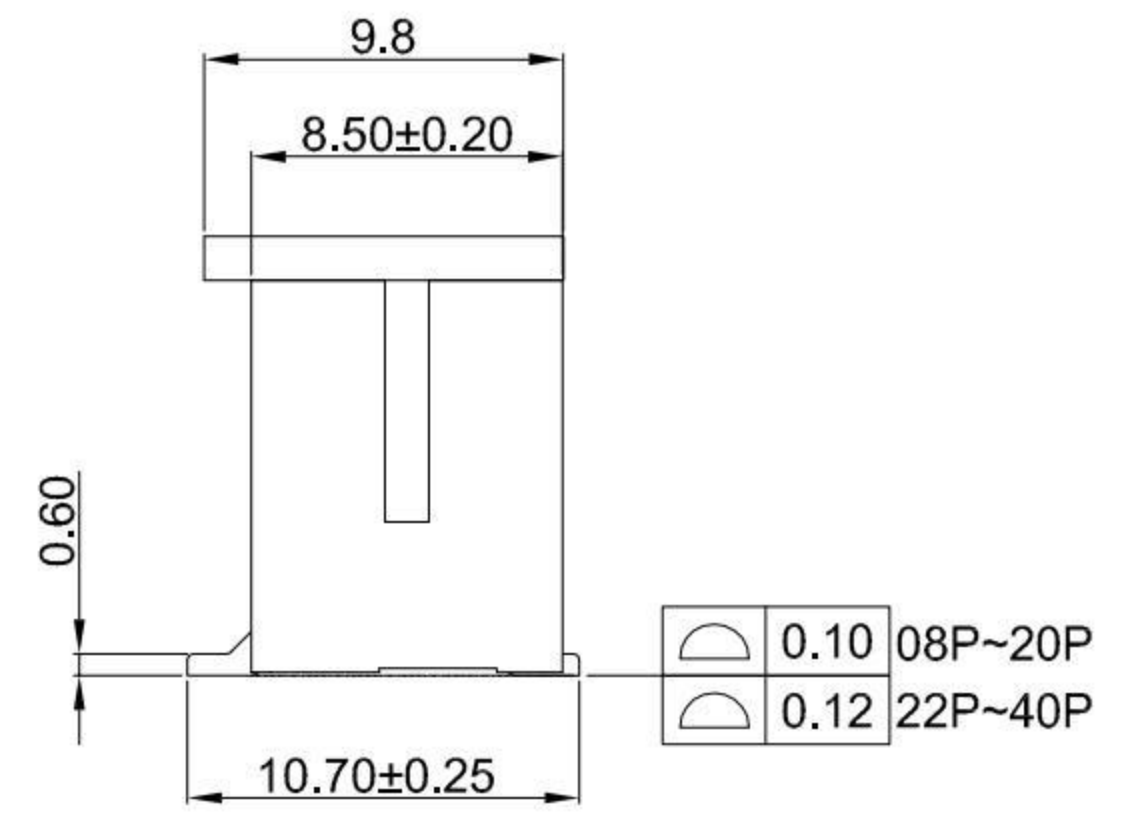
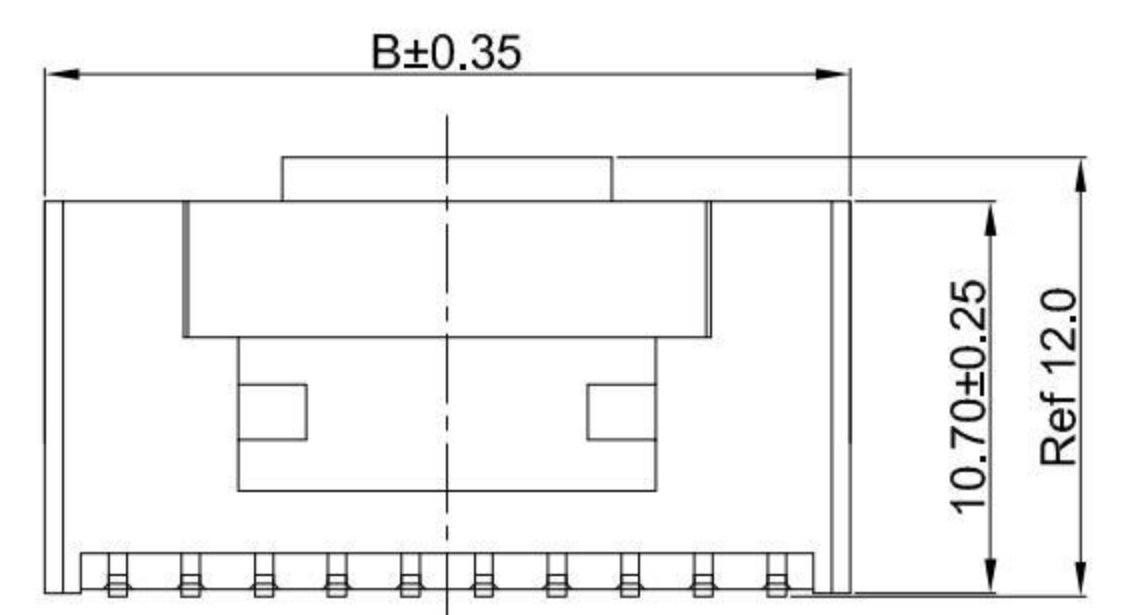





**G-Switch Specification:**

1. Current rated: 3.0A AC/DC
2. Voltage rating: 250V AC/DC
3. Withstanding voltage: 800V AC
4. Contact resistance: 10mΩ max.
5. Insulation resistance: 1000MΩ min
6. Durability cycle: 30Cycles
7. Removal force: 1.00kgf/Pin min
8. Operating temperature range: -25°C ~ +85°C

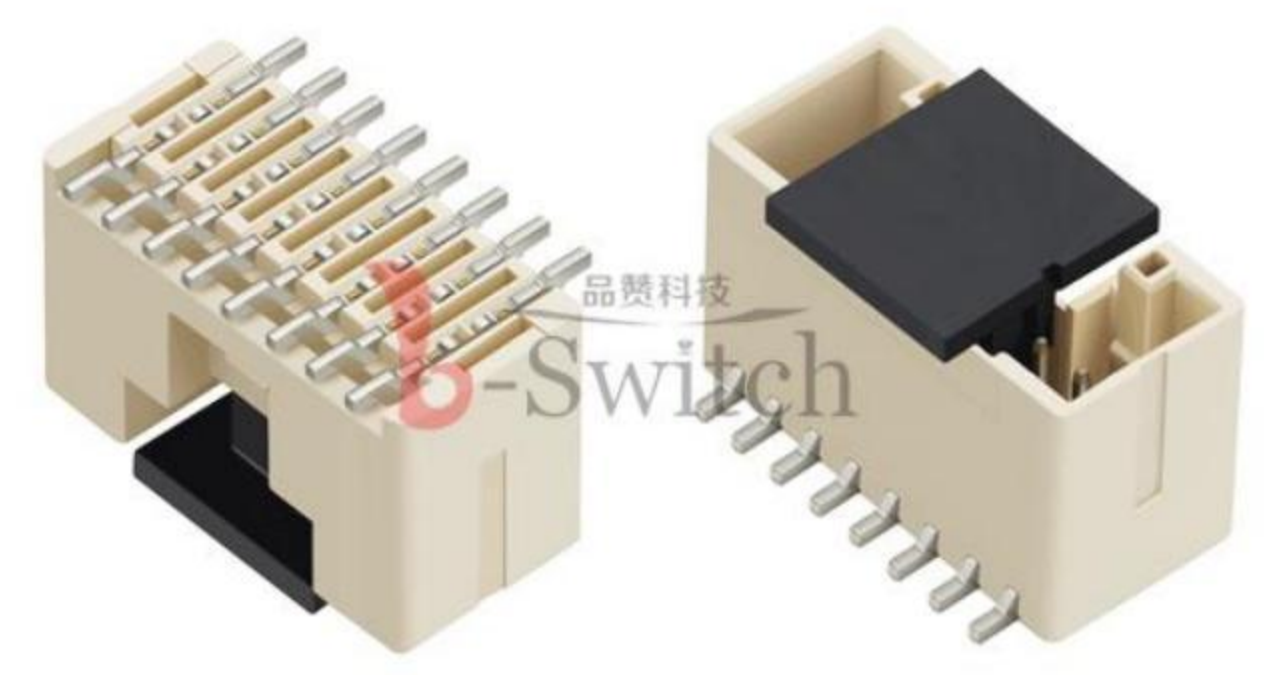

GT-A2012 W V S -2 XX X XX 01

- G-Switch**
- Series No**
- Connector**  
W-Wafer
- Angle**  
V-180°
- Termipoint**  
S-SMT
- Terminal Plating**  
BT-Bright Tin  
11-All G/F
- Housing Colour**  
S-Nature
- Pin Q' PY**  
08~40
- Row NO**  
2-Dual Rows

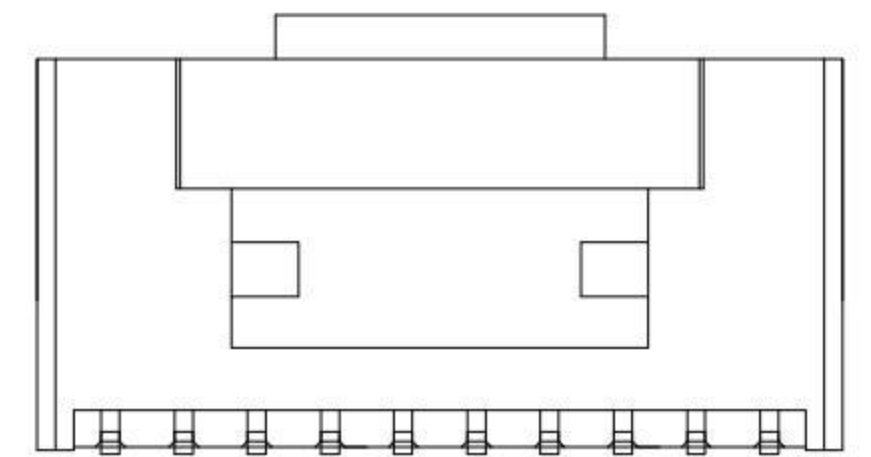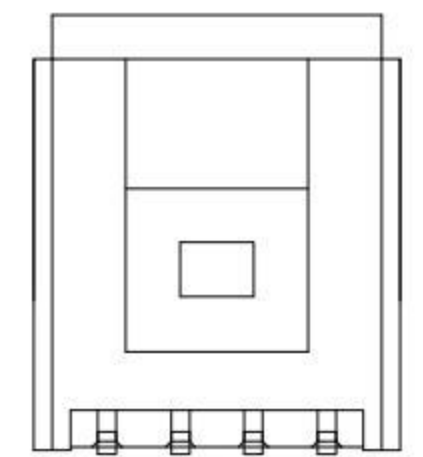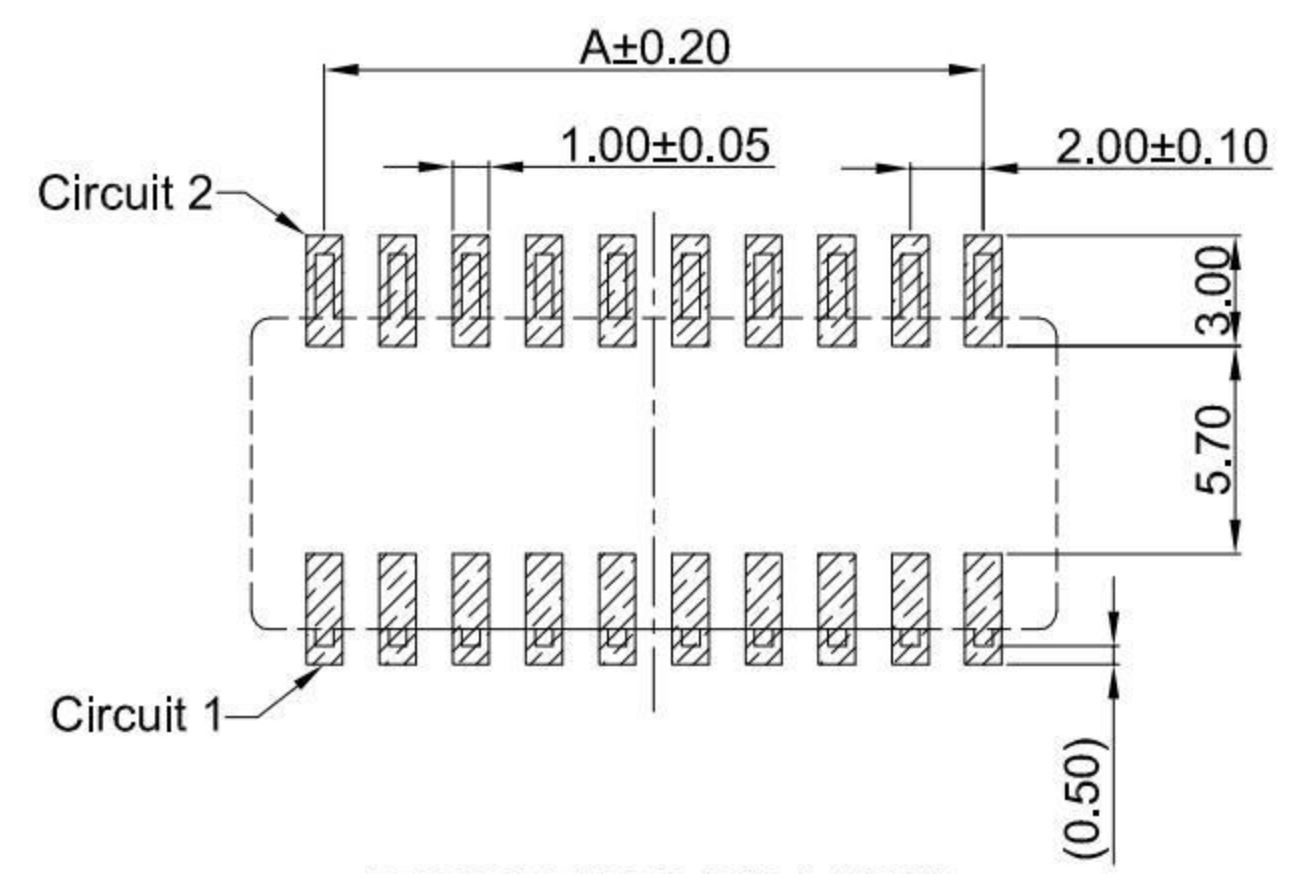

**Ordering Information:**

Circuit	Dimensions(mm)		Circuit	Dimensions(mm)	
	A	B		A	B
08	6.00	10.00	26	24.00	28.00
10	8.00	12.00	28	26.00	30.00
12	10.00	14.00	30	28.00	32.00
14	12.00	16.00	32	30.00	34.00
16	14.00	18.00	34	32.00	36.00
18	16.00	20.00	36	34.00	38.00
20	18.00	22.00	38	36.00	40.00
22	20.00	24.00	40	38.00	42.00
24	22.00	26.00	---	---	---

NO.	PART NAME	MATERIAL	REMARK
3	CONTACT	BRASS	BRIGHT Tin/ALL G/F
2	CAP	LCP,94V-0	BLACK
1	HOUSING	LCP,94V-0	NATURE

SCALE: 1:1 UNIT: mm  
 SIZE: A4

Title: Wafer 2.00mm Pitch 180° PUD SMT  
 Type Dual Rows Connector

Unless otherwise  
 General Tolerance:  
 X ±0.40  
 X.x ±0.30  
 X.xx ±0.20  
 X\* ±5°  
 X.x° ±3°

Molde Code: GT-A2012WVS-2XXXXX01

DRAWN	CHECKED	APPROVED	DATE
Hu	Hu	Chen	2021.10.20



REV: A0 SHEET: 1/2




A

B


C

D


E




8Pin

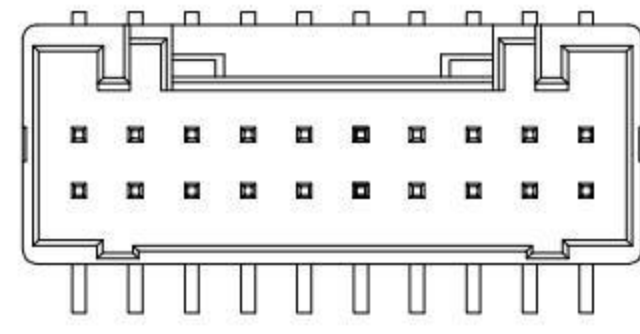


20Pin

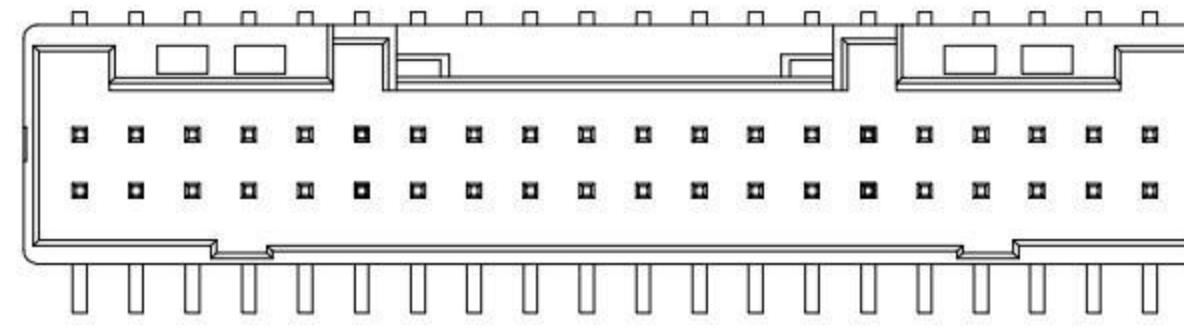


40Pin

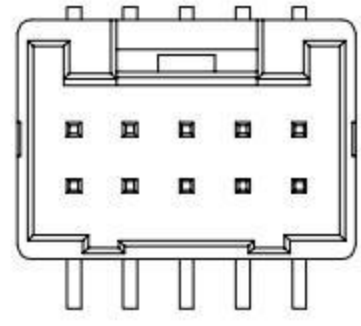


10Pin

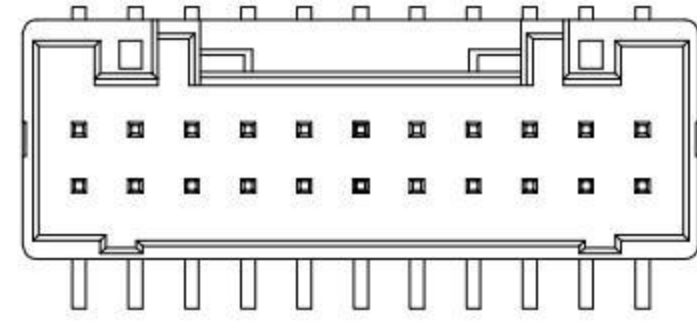


22Pin

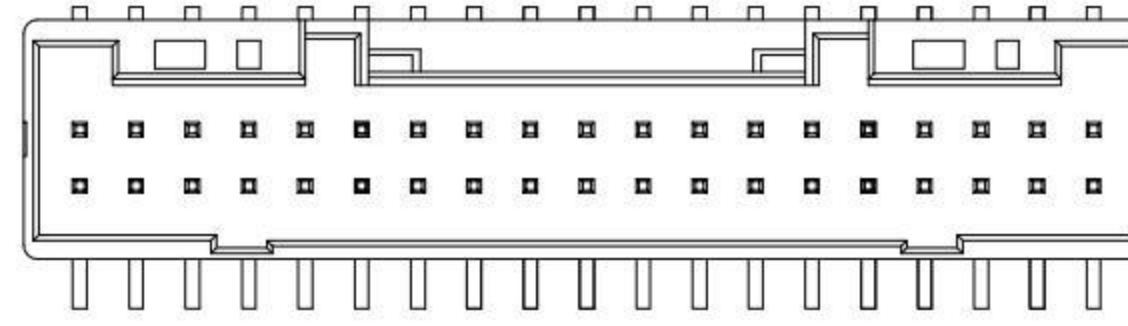


38Pin

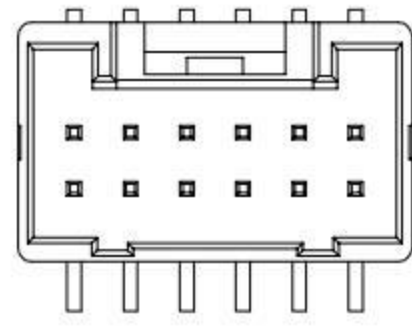


12Pin

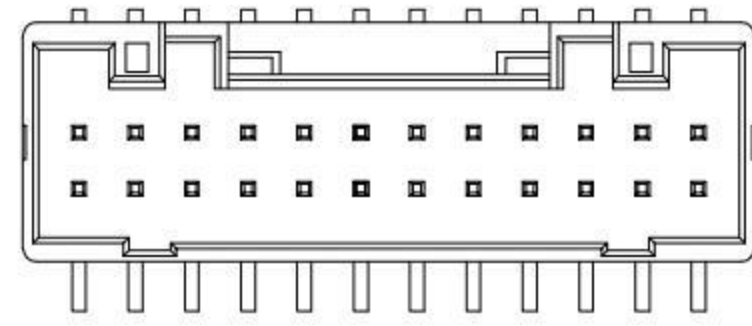


24Pin

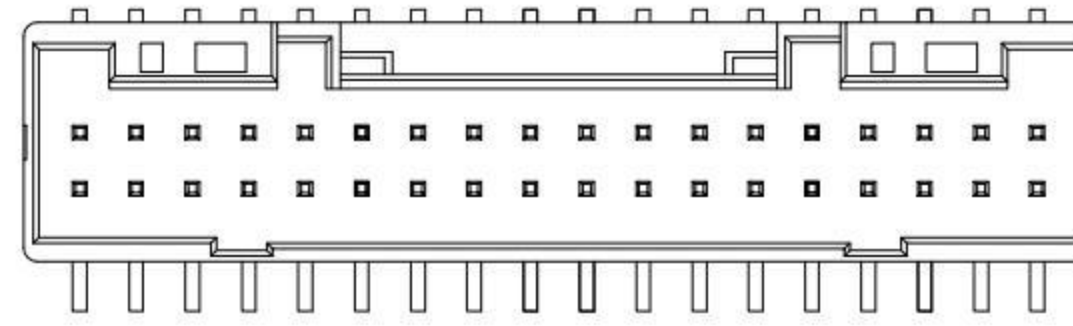


36Pin

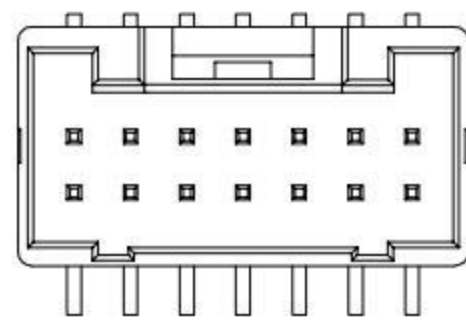


14Pin

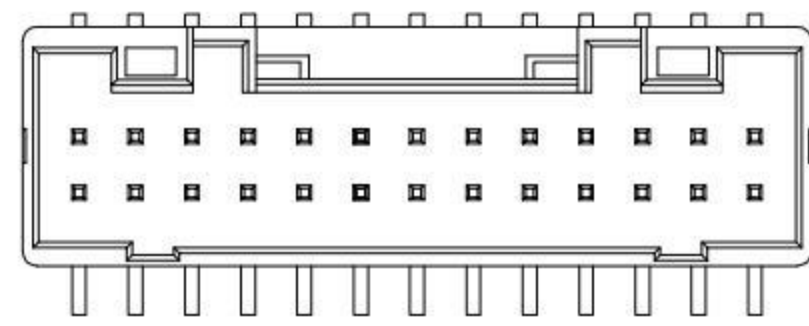


26Pin

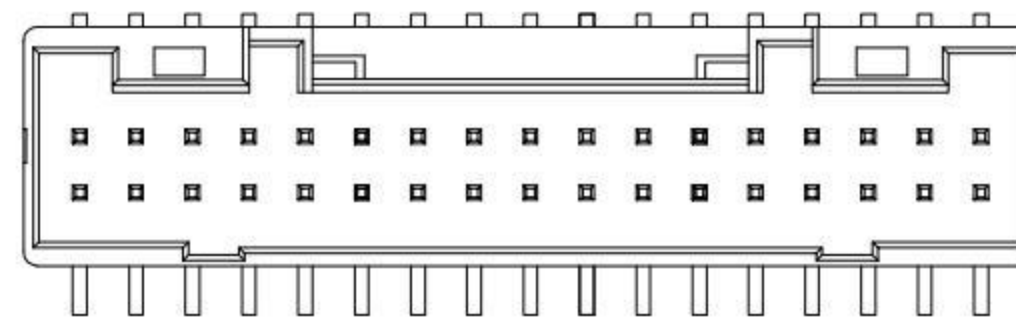


34Pin

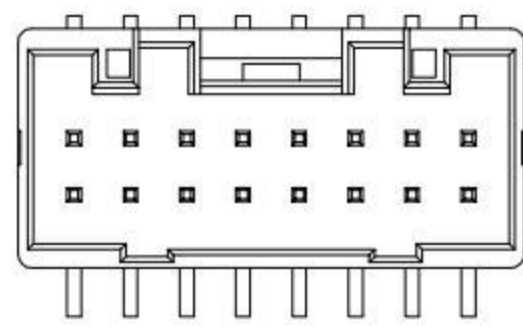


16Pin

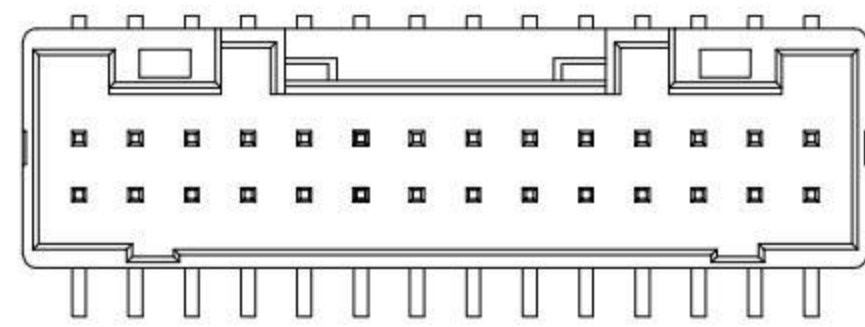


28Pin

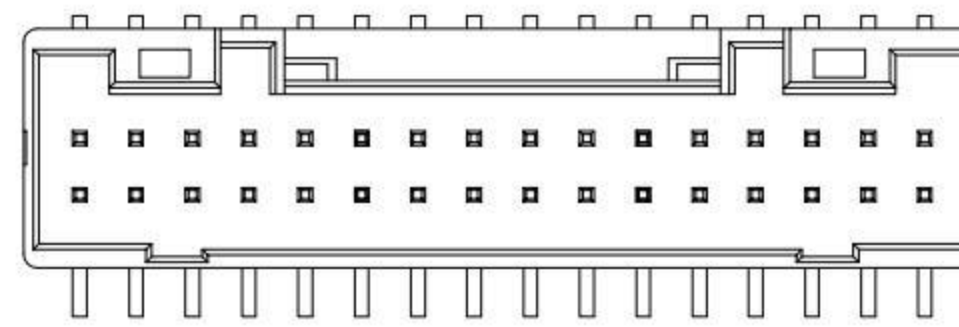


32Pin

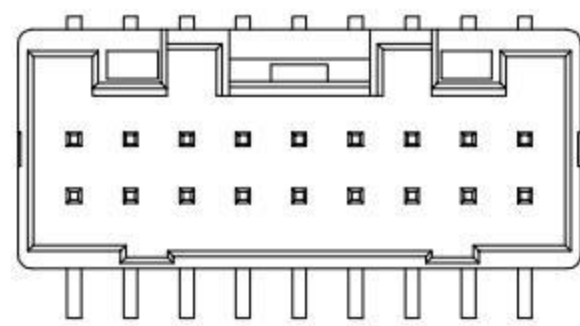

18Pin

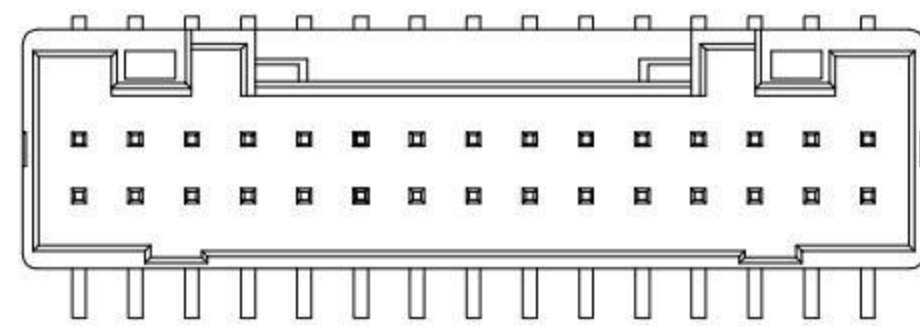

30Pin

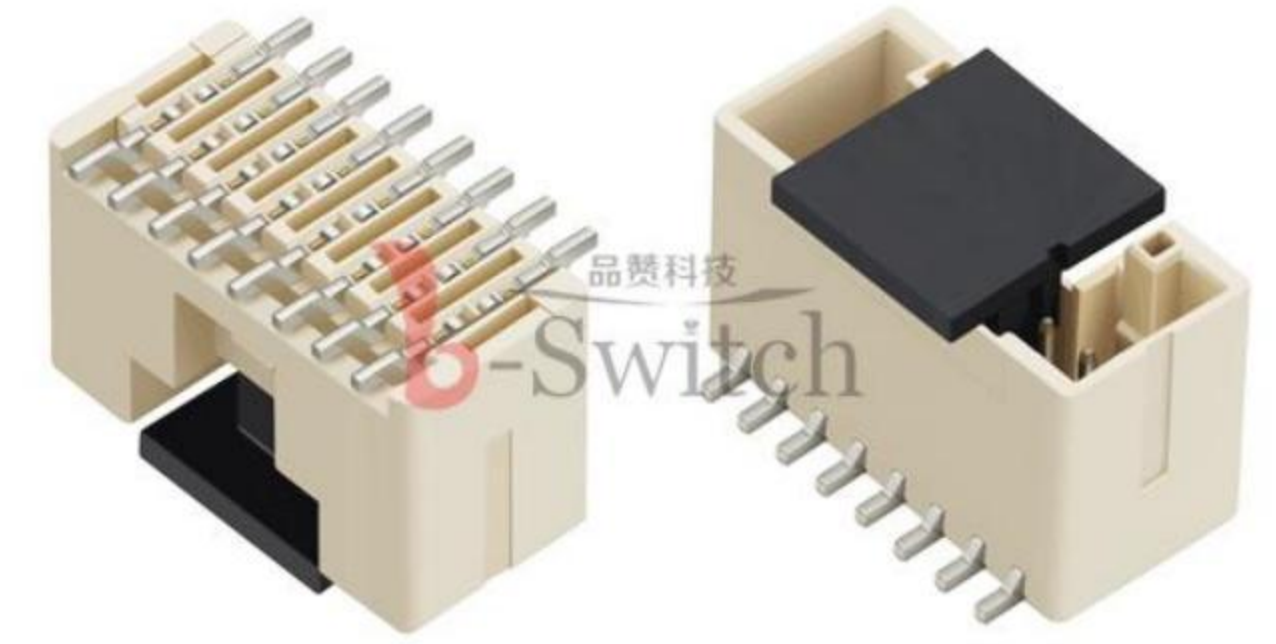

GT-A2012 W V D -2 XX X XX 01

G-Switch

Series No

Connector  
W-Wafer

Angle  
V-180°

Termpoint  
D-DIP

Terminal Plating  
BT-Bright Tin  
11-All G/F

Housing Colour  
W-White

Pin Q' PY  
08~40

Row NO  
2-Dual Rows

2	PIN MATERIAL	BRASS	BRIGHT Tin/ALL G/F
1	HOUSING	PA66,94V-0	WHITE
NO.	PART NAME	MATERIAL	REMARK



SCALE: 1:1 UNIT: mm

SIZE: A4

Unless otherwise  
General Tolerance:

X	±0.40
X.x	±0.30
X.xx	±0.20
X*	±5°
X.x°	±3°

Title: Wafer 2.00mm Pitch 180° PUD DIP  
Type Dual Rows Connector

Molde Code: GT-A2012WVD-2XXXXX01

DRAWN	CHECKED	APPROVED	DATE
Hu	Hu	Chen	2021.10.20



REV: A0 SHEET: 2/2

A

B

C

D

E