


A





G-Switch Specification:

- 1.Current rated: 0.3A AC/DC
- 2.Voltage rating: 50V AC/DC
- 3.Withstanding voltage: 150V AC
- 4.Contact resistance: 90mΩ max
- 5.Insulation resistance: 1000MΩ min
- 6.Durability cycle: 30 Cycles
- 7.Removal force: 0.10kgf/Pin min
- 8.Operating temperature range: -55°C ~ +125°C

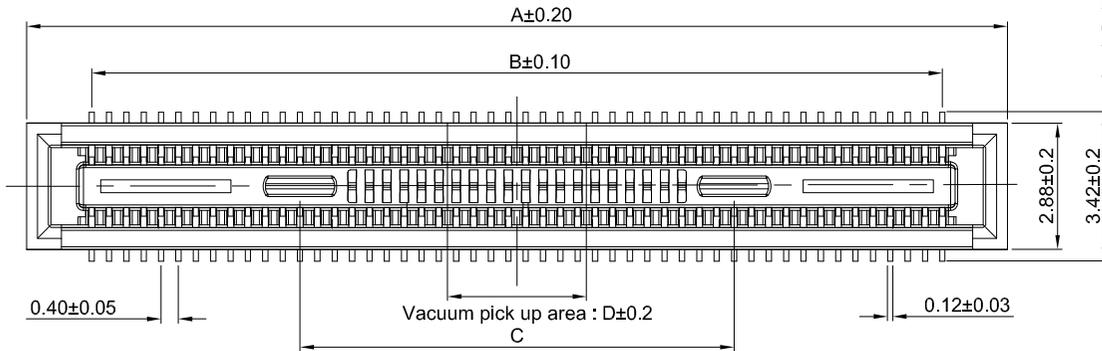

B

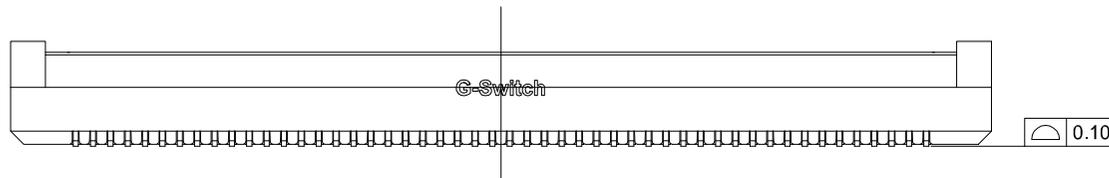


GT-B0403 F S V 24 -XX X XX 01



G-Switch
Series No
F-Female
Termpoint
 S-SMT
Angle
 V-180°

Terminal Plating
 11-All Au G/F
Housing Colour
 B-Black
Pin Q' PY
 10-120
Height
 24-2.4mm

C

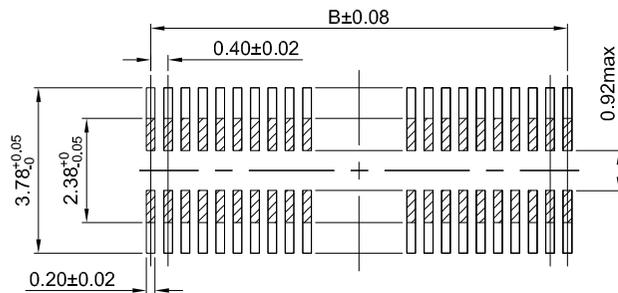

PCB REFERENCE DIAGRAM
 TOLERANCE:±0.05

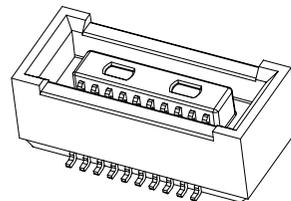

MATING HEIGHT

Ordering Information:

Circuit	Dimensions				Mating height	Plug (H.)	Socket (H.)
	A	B	C	D			
10	4.60	1.60	-	-	1.5	1.14	1.4
12	5.00	2.00	-	1.00	2.0	1.14	1.9
20	6.60	3.60	1.93	-	2.5	1.14	2.4
24	7.40	4.40	2.43	1.20	3.0	1.14	2.9
30	8.60	5.60	3.18	1.50	3.5	1.14	3.4
34	9.40	6.40	3.68	2.30	4.0	1.14	3.9
40	10.60	7.60	5.08	-	--	-	-
44	11.40	8.40	5.86	-	--	-	-
50	12.60	9.60	5.50	-	--	-	-
60	14.60	11.60	6.00	-	--	-	-
70	16.60	13.60	7.00	3.20	--	-	-
80	18.60	15.60	8.00	-	--	-	-
90	20.60	17.60	9.00	-	--	-	-
100	22.60	19.60	10.00	-	--	-	-
120	26.60	23.60	14.00	-	--	-	-

E

NO.	PART NAME	MATERIAL	REMARK
2	CONTACT	HIGH CONDUCTIVITY COPPER	ALL Au G/F
1	HOUSING	LCP+30%GF,94V-0	BLACK



SCALE: 1:1 UNIT: mm
 SIZE: A4

Title: BTB 0.4mm Pitch 180° H2.40mm Dual Rows
 SMT Type Female Connector

Unless otherwise General Tolerance:
 X ±0.40
 X.x ±0.30
 X.xx ±0.20
 X° ±5°
 X.x° ±3°

Molde Code: GT-B0403FSV24-XXXXX01

DRAWN	CHECKED	APPROVED	DATE
Hu	Chen	Chen	2022,12,28



REV: A0 SHEET: 1/1